chanhvinh.com

SAC-3P- 3,0-PVC/A-1L-V 230V - Sensor/actuator cable

1415913

https://www.phoenixcontact.com/gb/products/1415913

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 3-position, PVC, black RAL 9005, free cable end, on Valve connector A, with 1 LED, Wiring: Varistor 230 V, cable length: 3 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Convenient: increased machine availability thanks to quick and easy diagnostics

Commercial data

Item number	1415913
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF1DAA
Product key	BF1DAA
Catalog page	Page 233 (C-2-2019)
GTIN	4055626054780
Weight per piece (including packing)	136.9 g
Weight per piece (excluding packing)	131.3 g
Customs tariff number	85444290
Country of origin	PL

chanhvinh.com

SAC-3P- 3,0-PVC/A-1L-V 230V - Sensor/actuator cable

1415913

https://www.phoenixcontact.com/gb/products/1415913

Technical data

Product properties

Product type	Sensor/actuator cable with valve connector
Application	Standard
Number of positions	3
No. of cable outlets	1
Shielded	no

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Seal material	TPU
Material housing valve plug	TPU
Contact material	CuSn
Valve plug contact insert material	PA 6.6
Contact surface material	Sn

Electrical properties

Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	230 V AC
	230 V DC
Nominal current I_N	4 A

Signaling

Status display	1 LED
Status display present	Yes

Connector

Connection 1

Type	free cable end

Connection 2

Type	Valve connector A
Number of positions	3
Material	CuSn (Contact)
	Sn (Contact surface)
	PA 6.6 (Contact carriers)
	TPU (Housing)

Cable/line

chanhvinh.com


SAC-3P- 3,0-PVC/A-1L-V 230V - Sensor/actuator cable

1415913

https://www.phoenixcontact.com/gb/products/1415913

Cable length	3 m

PVC black [PVC]

Dimensional drawing	
Cable weight	38.6 kg/km
UL AWM Style	2464
Number of positions	3
Shielded	no
Cable type	PVC black [PVC]
Conductor structure signal line	16x 0.20 mm
AWG signal line	20
Conductor cross section	3x 0.5 mm²
Wire diameter incl. insulation	1.5 mm ±0.05 mm
External cable diameter	4.80 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	black 1, black 2, green/yellow
Overall twist	3 wires, twisted
Max. conductor resistance	39 Ω/km (at 20 °C)
Insulation resistance	≥ 20 MΩ*km
Nominal voltage, cable	300 V
Test voltage	1200 V
Minimum bending radius, fixed installation	5 x D
Smallest bending radius, fixed installation	24 mm
Flame resistance	DIN VDE 0482
	DIN EN 50265-2-1
Resistance to oil	in accordance with DIN EN 60811-2-1
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
	-5 °C ... 80 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-20 °C ... 85 °C (valve plug)

chanhvinh.com

SAC-3P- 3,0-PVC/A-1L-V 230V - Sensor/actuator cable

1415913

https://www.phoenixcontact.com/gb/products/1415913

Standards and regulations

Valve connector

Standard designation	Valve connector
Standards/specifications	EN 175301-803

chanhvinh.com


SAC-3P- 3,0-PVC/A-1L-V 230V - Sensor/actuator cable

1415913

https://www.phoenixcontact.com/gb/products/1415913


Drawings

Dimensional drawing

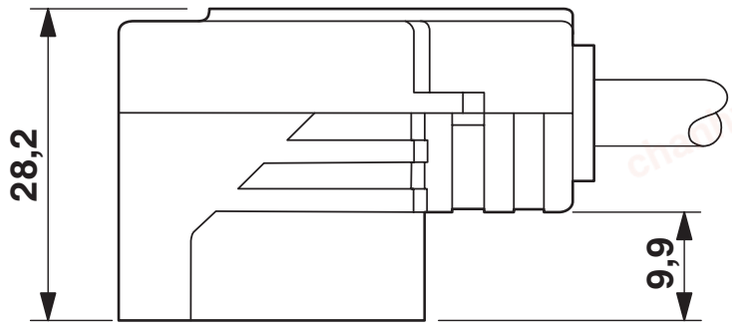

Valve connector, type A, side view

Dimensional drawing

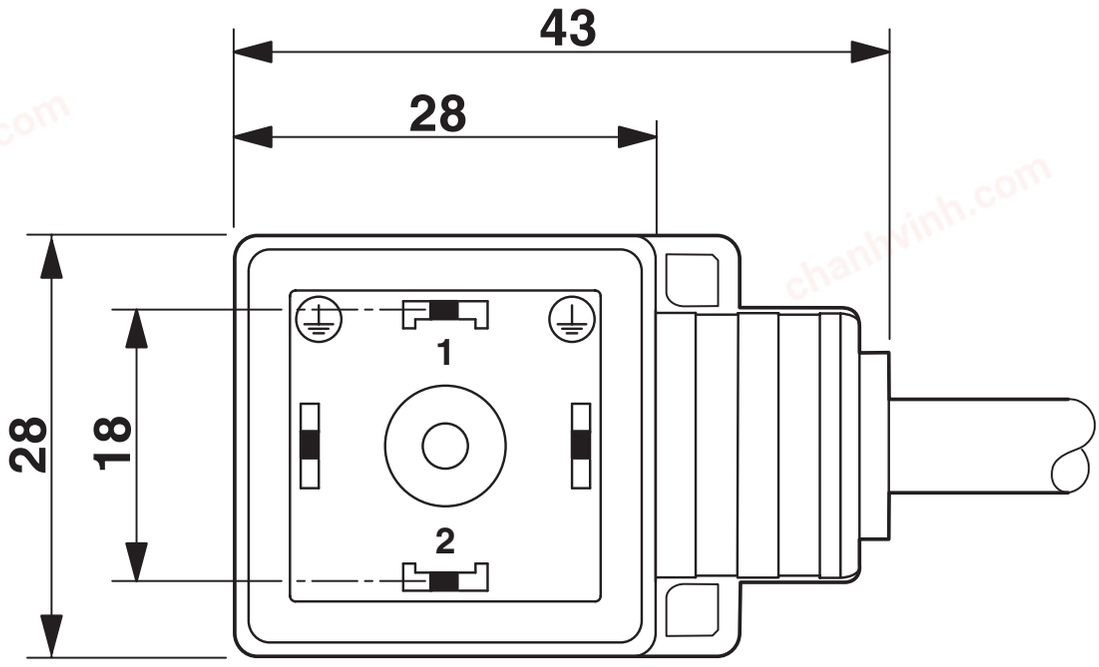

Valve connector, type A


chanhvinh.com

SAC-3P- 3,0-PVC/A-1L-V 230V - Sensor/actuator cable

1415913


https://www.phoenixcontact.com/gb/products/1415913

Schematic diagram

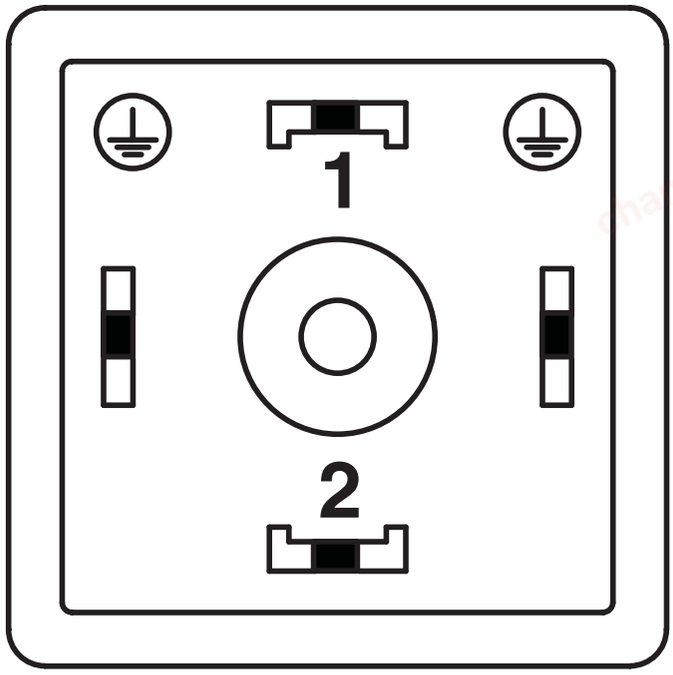

Valve connector pin assignment, type A

Circuit diagram

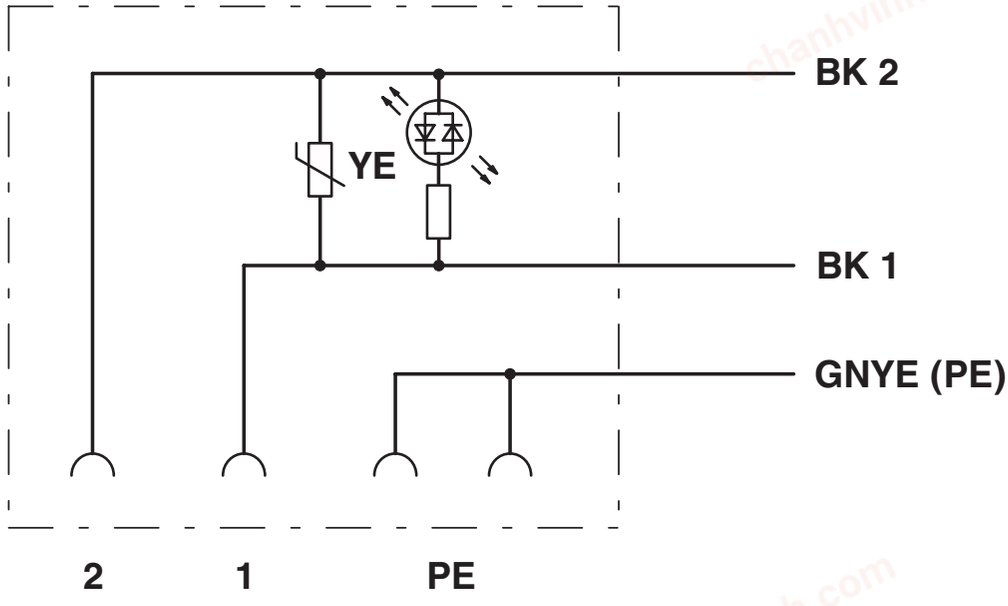

chanhvinh.com

SAC-3P- 3,0-PVC/A-1L-V 230V - Sensor/actuator cable

1415913

https://www.phoenixcontact.com/gb/products/1415913

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/gb/products/1415913

EAC-RoHS
Approval ID: RU D-DE.HB35.B.00387

CSAus
Approval ID: 13631

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	230 V	4 A	-	-

chanhvinh.com

SAC-3P- 3,0-PVC/A-1L-V 230V - Sensor/actuator cable

1415913

https://www.phoenixcontact.com/gb/products/1415913

Classifications

ECLASS

ECLASS-11.0	27060312
ECLASS-12.0	27060312
ECLASS-13.0	27060312

ETIM

ETIM 9.0	EC001855

UNSPSC

UNSPSC 21.0	31251500

chanhvinh.com

SAC-3P- 3,0-PVC/A-1L-V 230V - Sensor/actuator cable

1415913

https://www.phoenixcontact.com/gb/products/1415913

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol(CAS: 119-47-1)
SCIP	12c7a1bb-d4a2-4fca-a853-0415cc8e1d0c

EF3.0 Climate Change

CO2e kg	1.805 kg CO2e

Phoenix Contact 2024 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk