chanhvinh.com

Bus system cable - SAC-3P-M12MS/ 2,0-961/M12FS VA

1419105

https://www.phoenixcontact.com/gb/products/1419105

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Bus system cable, PROFIBUS PA (31.25 kbps), 3-position, PVC, blue RAL 5015, shielded, Plug straight M12, coding: A, on Socket straight M12, coding: A, cable length: 2 m, For Ex area with high-grade steel knurl

Commercial Data

Item number	1419105
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BF1CCG
Product Key	BF1CCG
Catalog Page	Page 430 (C-2-2019)
GTIN	4046356541725
Weight per Piece (including packing)	169.4 g
Weight per Piece (excluding packing)	169.4 g
Customs tariff number	85444290
Country of origin	PL

chanhvinh.com

Bus system cable - SAC-3P-M12MS/ 2,0-961/M12FS VA

1419105

https://www.phoenixcontact.com/gb/products/1419105

Technical Data

Notes

General	For applications in circuits of intrinsic safety protection type "i". Electrical values following EN 60079-14.

Product properties

Product type	Data cable preassembled
Number of positions	3
Application	Process technology
No. of cable outlets	1
Shielded	yes
Coding	B - inverse

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Interfaces

Bus system	PROFIBUS PA
Signal type/category	PROFIBUS PA, 31.25 kbps

LED signaling

Status display	No
Status display present	No

Electrical properties

Contact resistance	≤ 5 mΩ
Nominal voltage U_N	48 V AC
	60 V DC
Nominal current I_N	4 A
Transmission medium	Copper

Material specifications

Color Handle area	black
Flammability rating according to UL 94	HB
Sealing material	NBR
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Cable gland material	Stainless steel

Connection data

chanhvinh.com

Bus system cable - SAC-3P-M12MS/ 2,0-961/M12FS VA

1419105

https://www.phoenixcontact.com/gb/products/1419105

Pin assignment

Contact | Color (signal designation) | Contact (optional)	1 (Plug) = OG (DATA+) = 1 (Socket)
	3 (Plug) = BU (DATA-) = 3 (Socket)
	4 (Plug) = SR (shield) = 4 (Socket)

Connector

Insertion/withdrawal cycles	≥ 100

Header 1

Head design	Plug
Head cable outlet	straight
Head thread type	M12
Coding	A

Head 2

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Coding	A

Cable / line

Cable length	2 m
Cable weight	56.552 kg/km
Number of positions	2
Shielded	yes
Cable type	Fieldbus FOUNDATION/PROFIBUS PA, blue [961]
Signal speed	0.66 c
Conductor structure signal line	7x 0.40 mm
AWG signal line	18
Conductor cross section	2x 0.75 mm² (Signal line)
	1x 0.5 mm² (Drain wire)
Wire diameter incl. insulation	2.24 mm ±0.05 mm
External cable diameter	7.5 mm ±0.25 mm
Outer sheath, material	PVC
External sheath, color	blue RAL 5015
Conductor material	Tin-plated Cu litz wires
Material wire insulation	PO (Signal line)
Single wire, color	Blue, orange
Thickness, insulation	0.5 mm
Thickness, outer sheath	1 mm
Twisted pairs	2 cores to the pair
Overall twist	One pair with one drain wire and fillers for core
Optical shield covering	100 %
Max. conductor resistance	≤ 19.35 Ω/km (Signal line)
	26 Ω/km (shield)

chanhvinh.com

Bus system cable - SAC-3P-M12MS/ 2,0-961/M12FS VA

1419105

https://www.phoenixcontact.com/gb/products/1419105

Cable capacity	147 pF/m (at 1 kHz, core/shield)
	≤ 3.94 pF/m (capacitance unbalance)
Working capacitance	78 nF (at 1 kHz)
Cable impedance	100 Ω ±20 % (At 31.25 kHz)
Nominal voltage, cable	300 V
Smallest bending radius, fixed installation	75 mm
Tensile strength	260 N
Shield attenuation	3 dB/km (at 39 kHz)
Flame resistance	UL 1685 (CSA FT 4)
	UL 1685 (vertical tray)
	UL 1666 (riser)
Special properties	UL standards PLTC-ER and ITC
Ambient temperature (operation)	-40 °C ... 105 °C (cable, fixed installation)

Cable structure

Cable type	Fieldbus FOUNDATION/PROFIBUS PA, blue
Signal type/category	PROFIBUS PA, 31.25 kbps
Outer sheath, material	PVC
External sheath, color	blue RAL 5015
Conductor material	Tin-plated Cu litz wires

Ambient conditions

Degree of protection	IP65
	IP67
	IP68
	IP69K
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)

chanhvinh.com


Bus system cable - SAC-3P-M12MS/ 2,0-961/M12FS VA

1419105

https://www.phoenixcontact.com/gb/products/1419105


Drawings

Schematic diagram

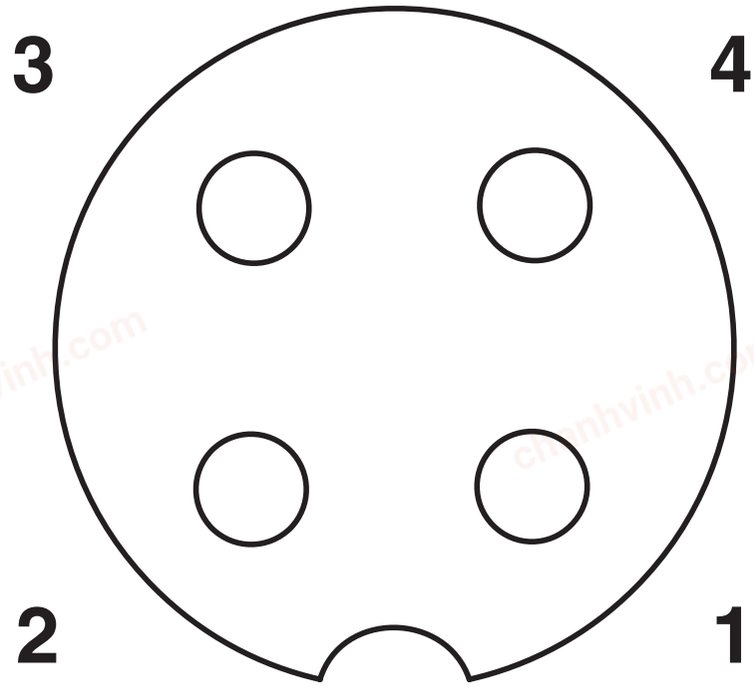

Pin assignment M12 socket, 3-pos., A-coded, view female side

Dimensional drawing

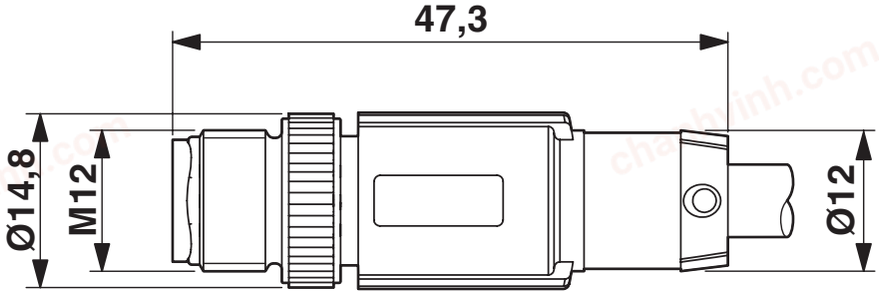

Plug, M12 x 1, straight, shielded


chanhvinh.com

Bus system cable - SAC-3P-M12MS/ 2,0-961/M12FS VA

1419105


https://www.phoenixcontact.com/gb/products/1419105

Dimensional drawing

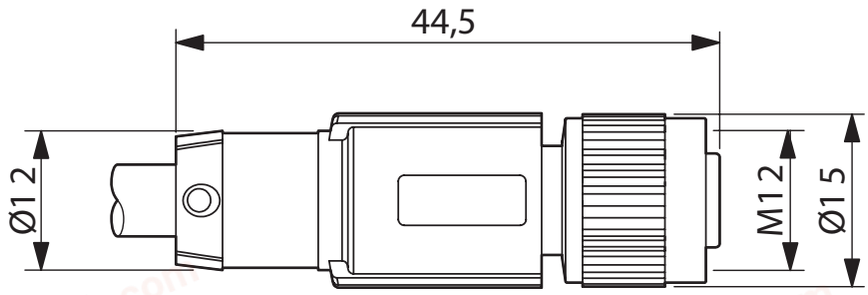

M12 x 1 socket, straight

Circuit diagram

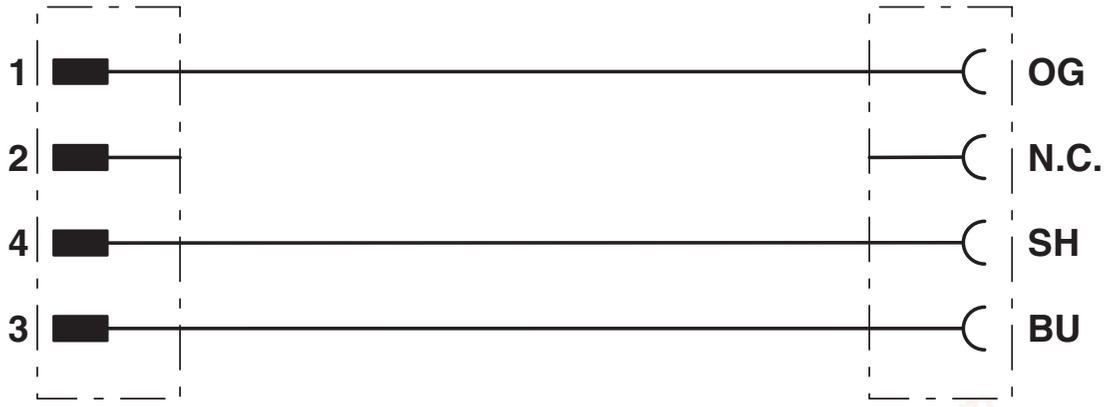

Contact assignment of the M12 connector and the M12 socket


chanhvinh.com

Bus system cable - SAC-3P-M12MS/ 2,0-961/M12FS VA

1419105

https://www.phoenixcontact.com/gb/products/1419105

Schematic diagram

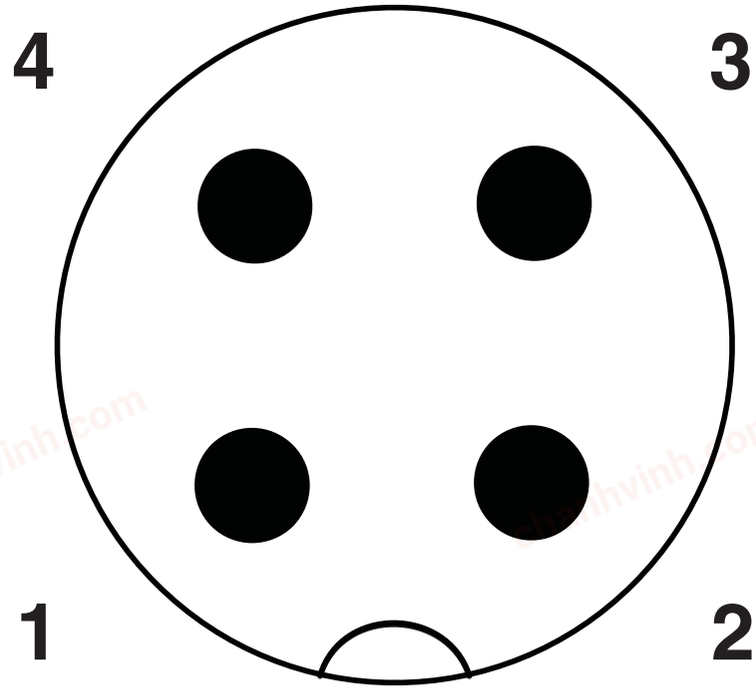

Pin assignment M12 plug, 3-pos., A-coded, view male side

chanhvinh.com

Bus system cable - SAC-3P-M12MS/ 2,0-961/M12FS VA

1419105

https://www.phoenixcontact.com/gb/products/1419105

Approvals

EAC
Approval ID: RU C-DE.BL08.B.00286

EAC
Approval ID: RU D-DE.HB35.B.00387

chanhvinh.com

Bus system cable - SAC-3P-M12MS/ 2,0-961/M12FS VA

1419105

https://www.phoenixcontact.com/gb/products/1419105

Classifications

ECLASS

ECLASS-9.0	27060308
ECLASS-10.0.1	27060308
ECLASS-11.0	27060307

ETIM

ETIM 8.0	EC001855

UNSPSC

UNSPSC 21.0	26121600

chanhvinh.com

Bus system cable - SAC-3P-M12MS/ 2,0-961/M12FS VA

1419105

https://www.phoenixcontact.com/gb/products/1419105

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

chanhvinh.com

Bus system cable - SAC-3P-M12MS/ 2,0-961/M12FS VA

1419105

https://www.phoenixcontact.com/gb/products/1419105

Accessories

Torque screwdriver

Torque screwdriver - TSD 04 SAC - 1208429

https://www.phoenixcontact.com/gb/products/1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

Torque screwdriver

Torque screwdriver - TSD-M 1,2NM - 1212224

https://www.phoenixcontact.com/gb/products/1212224



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

chanhvinh.com

Bus system cable - SAC-3P-M12MS/ 2,0-961/M12FS VA

1419105

https://www.phoenixcontact.com/gb/products/1419105

Adapter insert

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600

https://www.phoenixcontact.com/gb/products/1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

Tool

Tool - SAC BIT M12-W14 - 1212513

https://www.phoenixcontact.com/gb/products/1212513



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a hexagonal knurl wrench size of 14 mm, with 4 mm hexagonal drive

Phoenix Contact 2022 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk