
chanhvinh.com

Bus system flat-type plug - VS-MSDBPS-OE-93K-LI/5,0

1419161

https://www.phoenixcontact.com/gb/products/1419161

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Bus system flat-type plug, Sercos, 4-position, PVC, Red RAL 3020, shielded, Flush-type male connector, straight, M12-SPEEDCON, D-coded, on free cable end, M16 x 1.5, Cable connection, cable length: 0.5 m, Sercos III

Your advantages

- Pre-assembled with cables in various standard lengths for immediate use
- Customer-specific assemblies and cable lengths can be supplied
- Sealed on the cable side for optimum tightness of seal
- Cable designs for all common networks and fieldbuses
- For high transmission safety: shield connection to the housing with optional EMC nut

Commercial Data

Item number	1419161
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	ABQCEC
Product Key	ABQCEC
Catalog Page	Page 317 (PC-2011)
GTIN	4046356541077
Weight per Piece (including packing)	382 g
Weight per Piece (excluding packing)	222 g
Customs tariff number	85444290
Country of origin	DE

chanhvinh.com

Bus system flat-type plug - VS-MSDBPS-OE-93K-LI/5,0

1419161

https://www.phoenixcontact.com/gb/products/1419161

Technical Data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.

Safety note

Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
	• The products are suitable for applications in plant, controller, and electrical device engineering.
	• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
	• Assembled products may not be manipulated or improperly opened.
	• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
	• When using the product in direct connection with third-party manufacturers, the user is responsible.
	• For operating voltages > 50 V AC, conductive connector housings must be grounded
	• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
	• Observe the corresponding technical data. You will find information: o On the product o On the packing label o In the supplied documentation o Online at phoenixcontact.com/products under the product
	• Only use tools recommended by Phoenix Contact
	• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
	• Ensure that the protective or functional ground has been properly connected.

chanhvinh.com

Bus system flat-type plug - VS-MSDBPS-OE-93K-LI/5,0

1419161

https://www.phoenixcontact.com/gb/products/1419161

	• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

Product properties

Product type	Data cable preassembled
Number of positions	4
No. of cable outlets	1
Shielded	yes
Coding	D - data

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Interfaces

Signal type/category	Sercos

Electrical properties

Rated surge voltage	2.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	250 V
Nominal current I_N	4 A (Plug/socket in accordance with IEC 61076-2-101, cable technical data is to be observed)
Transmission medium	Copper

Material specifications

Flammability rating according to UL 94	V0
Sealing material	FKM
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA 6.6
Cable gland material	Nickel-plated brass

Connection data

Connection technology

Connection method	Cable connection

Conductor connection

Type of contact	Crimp contacts
Connection method	Cable connection

chanhvinh.com

Bus system flat-type plug - VS-MSDBPS-OE-93K-LI/5,0

1419161

https://www.phoenixcontact.com/gb/products/1419161

Connector

Insertion/withdrawal cycles	≥ 100

Connection 1

Head design	Flush-type male connector
Head cable outlet	straight
Head thread type	M12
Head locking type	SPEEDCON
Coding	D-coded

Connection 2

Head design	free cable end

Cable / line

Cable length	0.5 m
Cable weight	68 kg/km
UL AWM Style	21694 (60°C / 600 V)
Number of positions	4
Shielded	yes
Cable type	Sercos III [93K]
Signal runtime	5.3 ns/m
Conductor structure signal line	7x 0.25 mm
AWG signal line	22
Conductor cross section	4x 0.34 mm²
Wire diameter incl. insulation	approx. 1.55 mm
External cable diameter	6.5 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	signal red RAL 3020
Conductor material	Tin-plated Cu litz wires
Material wire insulation	PE
Single wire, color	White, yellow, blue, orange
Thickness, outer sheath	approx. 0.9 mm
Type of pair shielding	Aluminum-lined polyester foil
Overall twist	Star quad
Max. conductor resistance	≤ 120 Ω/km
Insulation resistance	≥ 0.5 GΩ*km
Coupling resistance	≤ 20.00 mΩ/m (at 10 Hz)
Wave impedance	100 Ω ±15 Ω (at 100 MHz)
Nominal voltage, cable	600 V
Test voltage Core/Core	2000 V (50 Hz, 1 min.)
Test voltage Core/Shield	2000 V (50 Hz, 1 min.)
Minimum bending radius, fixed installation	3 x D
Minimum bending radius, flexible installation	7 x D
Flame resistance	according to UL 1685 (CSA FT 4)

chanhvinh.com

Bus system flat-type plug - VS-MSDBPS-OE-93K-LI/5,0

1419161

https://www.phoenixcontact.com/gb/products/1419161

Resistance to oil	Resistant to oil to a limited extent
Other resistance	UV resistant According to UL 1581, Section 1200
Ambient temperature (operation)	-40 °C ... 70 °C (cable, fixed installation)
	-40 °C ... 70 °C (Cable, flexible installation)
Ambient temperature (installation)	-20 °C ... 60 °C
Cable type	Sercos III
Signal type/category	Sercos
Outer sheath, material	PVC
External sheath, color	Red RAL 3020

Ambient conditions

Degree of protection	IP67 (When plugged in)
	IP65 (When plugged in)
Degree of protection	IP65/IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)

Standards and regulations

M12

Standards/specifications	IEC 61076-2-101

chanhvinh.com


Bus system flat-type plug - VS-MSDBPS-OE-93K-LI/5,0

1419161

https://www.phoenixcontact.com/gb/products/1419161


Drawings

Dimensional drawing

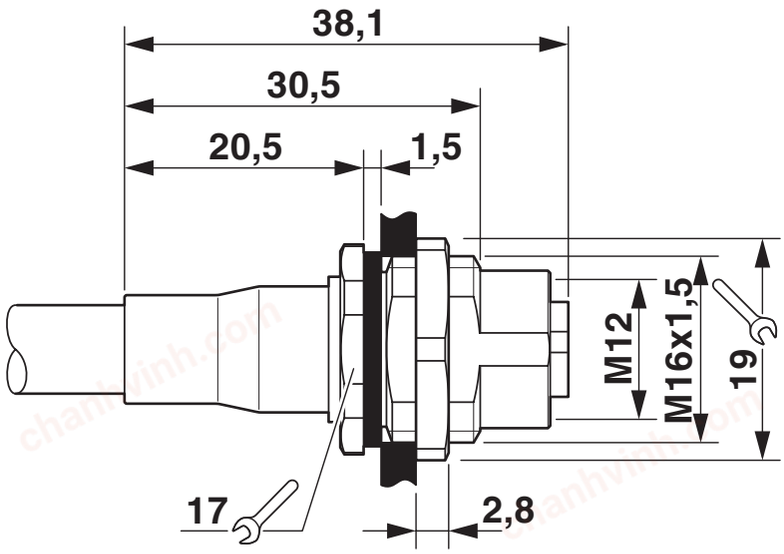

M12 panel feed-through

Diagram

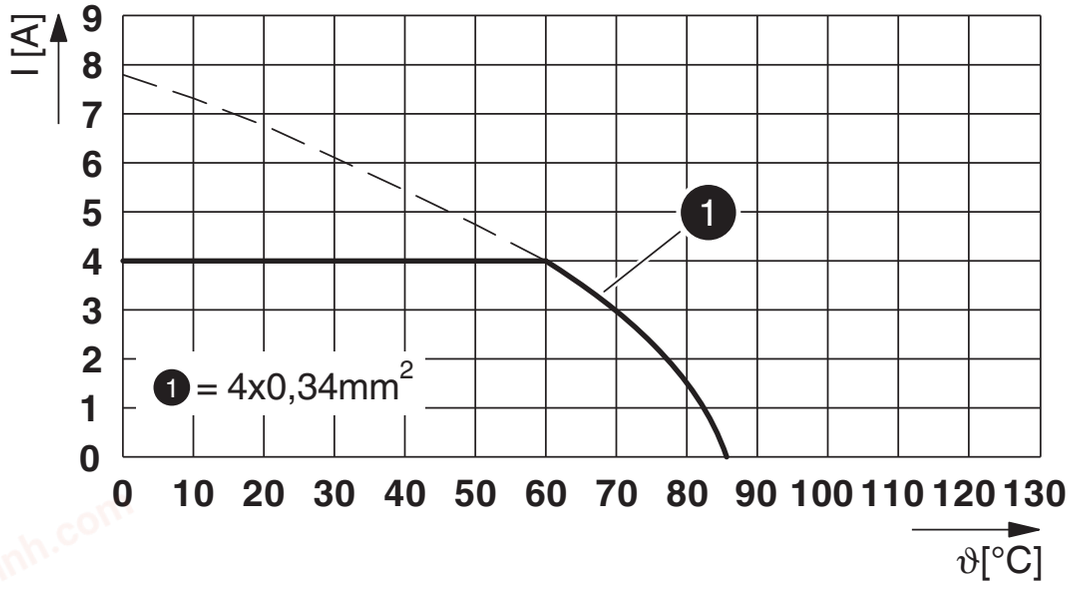

I = current strength, T = ambient temperature


chanhvinh.com

Bus system flat-type plug - VS-MSDBPS-OE-93K-LI/5,0

1419161

https://www.phoenixcontact.com/gb/products/1419161

Dimensional drawing

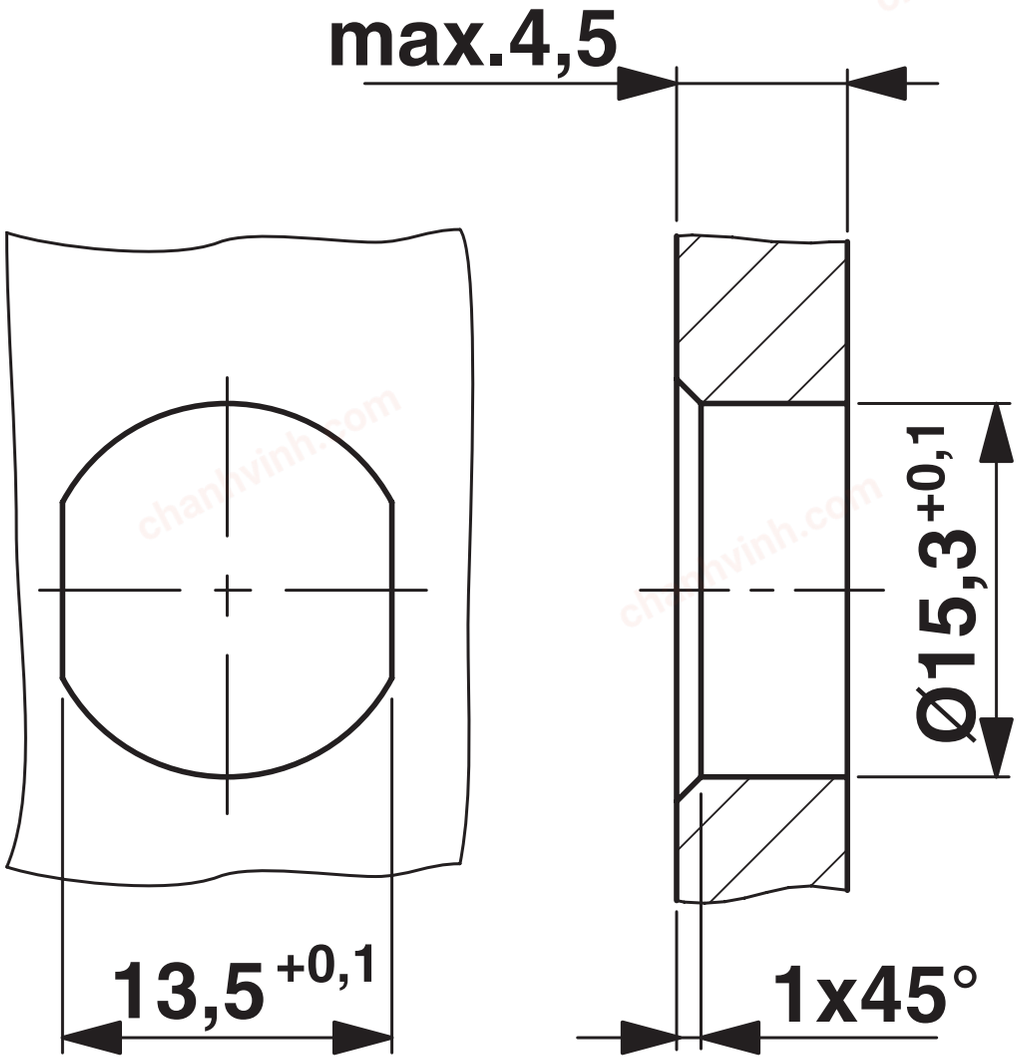

Housing cutout for Pg9 fastening thread, mounting panel with feed-through hole (alternatively with surface as protection against rotation)

chanhvinh.com

Bus system flat-type plug - VS-MSDBPS-OE-93K-LI/5,0

1419161

https://www.phoenixcontact.com/gb/products/1419161

Approvals

EAC
Approval ID: 19060508

chanhvinh.com

Bus system flat-type plug - VS-MSDBPS-OE-93K-LI/5,0

1419161

https://www.phoenixcontact.com/gb/products/1419161

Classifications

ECLASS

ECLASS-9.0	27440102
ECLASS-10.0.1	27440102
ECLASS-11.0	27440102

ETIM

ETIM 8.0	EC002635

UNSPSC

UNSPSC 21.0	39121400

chanhvinh.com

Bus system flat-type plug - VS-MSDBPS-OE-93K-LI/5,0

1419161

https://www.phoenixcontact.com/gb/products/1419161

Environmental Product Compliance

REACh SVHC	Lead 7439-92-1

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer’s declaration available under “Downloads”

chanhvinh.com

Bus system flat-type plug - VS-MSDBPS-OE-93K-LI/5,0

1419161

https://www.phoenixcontact.com/gb/products/1419161

Accessories

Screw plug

Screw plug - SACC-M16-SEALING PLUG SET - 1453368

https://www.phoenixcontact.com/gb/products/1453368



Screw plug, Rear mounting, M16 x 1.5

Sealing cap

Sealing cap - PROT-M12 FS - 1560251

https://www.phoenixcontact.com/gb/products/1560251



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

chanhvinh.com

Bus system flat-type plug - VS-MSDBPS-OE-93K-LI/5,0

1419161

https://www.phoenixcontact.com/gb/products/1419161

Sealing cap

Sealing cap - PROT-M12 FS-M - 1430488

https://www.phoenixcontact.com/gb/products/1430488



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

Flat gasket

Flat gasket - SACC-M16-SEAL CLM - 1430394

https://www.phoenixcontact.com/gb/products/1430394

M16 flat gasket for M12 flush-type connectors with M16 fastening thread



Phoenix Contact 2022 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk