chanhvinh.com

# NBC-M12FSD/ 0,3-93B/R4RC - Network cable

1419998

https://www.phoenixcontact.com/gb/products/1419998

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Network cable, PROFINET CAT5 (100 Mbps), EtherCAT® CAT5 (100 Mbps), 4-position, PVC/PVC, green RAL 6018, shielded (Advanced Shielding Technology), Socket straight M12, coding: D / IP67, on Plug straight RJ45 Push Pull / IP67, cable length: 0.3 m

## Commercial data

| | |
|---|---|
| Item number | 1419998 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | AF1CJN |
| Product key | AF1CJN |
| GTIN | 4055626200170 |
| Weight per piece (including packing) | 110.6 g |
| Weight per piece (excluding packing) | 108.3 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

chanhvinh.com

# NBC-M12FSD/ 0,3-93B/R4RC - Network cable

1419998

https://www.phoenixcontact.com/gb/products/1419998

## Technical data

### Notes

| | |
|---|---|
| General | This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 8.2 Connectors for Outside Environment (Balanced cabling) |

### Product properties

| | |
|---|---|
| Product type | Data cable preassembled |
| Application | Standard |
| Sensor type | PROFINET |
| Number of positions | 4 |
| Shielded | yes |

### Interfaces


| | |
|---|---|
| Signal type/category | PROFINET CAT5 (IEC 11801), 100 Mbps |
| | EtherCAT® CAT5 (IEC 11801), 100 Mbps |

### Electrical properties

| | |
|---|---|
| Nominal voltage $U_N$ | 48 V AC |
| | 60 V DC |
| Nominal current $I_N$ | 1 A |
| Transmission medium | Copper |

### Connector

Connection 1

| | |
|---|---|
| Dimensional drawing |  Pin assignment M12 socket, 4-pos., D-coded, female side |
| Type | M12 Socket, straight, 4-position, shielded (Advanced Shielding Technology), Keying: D |
| Number of positions | 4 |
| Shielded | yes |
| Shielding | Advanced Shielding Technology |
| Signal type/category | EtherCAT® CAT5 (IEC 11801), 100 Mbps |
| | PROFINET CAT5 (IEC 11801) |
| Insertion/withdrawal cycles | ≥ 100 |
| Insulation resistance | ≥ 100 MΩ |
| Overvoltage category | II |

chanhvinh.com


# NBC-M12FSD/ 0,3-93B/R4RC - Network cable

1419998

https://www.phoenixcontact.com/gb/products/1419998

| | |
|---|---|
| Degree of pollution | 3 |
| Tightening torque | 0.4 Nm |
| Material Contact | CuSn |
| Material Contact surface | Ni/Au |
| Material Contact carrier | PA 6.6 |
| Material Screw connection | Die-cast zinc, nickel-plated |
| Material Grip body | TPU, hardly inflammable, self-extinguishing |
| Material Seal | FKM |
| Flammability rating according to UL 94 | V0 |
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) | -25 °C ... 85 °C |
| Standard designation | M12 connector |
| Standards/regulations | IEC 61076-2-101 |

Connection 2

| | |
|---|---|
| Dimensional drawing |  Connector pin assignment plug RJ45 |
| Type | RJ45 Plug, straight |
| Signal type/category | PROFINET CAT5 (IEC 11801), 100 Mbps |
| | EtherCAT® CAT5 (IEC 11801) |
| Insertion/withdrawal cycles | ≥ 750 |
| Insulation resistance | ≥ 100 MΩ |
| Overvoltage category | I |
| Degree of pollution | 2 |
| Material Contact | CuSn |
| Material Contact surface | Ni/Au |
| Material Contact carrier | PC |
| Material Housing | PA-GF |
| Color (Housing) | gray |
| Flammability rating according to UL 94 | V2 |
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 70 °C |

## Cable/line

| | |
|---|---|
| Cable length | 0.3 m |


PROFINET PVC stranded CAT5 [93B]

chanhvinh.com

# NBC-M12FSD/ 0,3-93B/R4RC - Network cable

1419998

https://www.phoenixcontact.com/gb/products/1419998

| | |
|---|---|
| Dimensional drawing |  |
| Cable weight | 67 kg/km |
| UL AWM Style | 21694 |
| Number of positions | 4 |
| Shielded | yes |
| Cable type | PROFINET PVC stranded CAT5 [93B] |
| Conductor structure | 1x4xAWG22/7, SF/TQ |
| Signal runtime | 5.3 ns/m |
| Signal speed | 0.66 c |
| Conductor structure signal line | 7x 0.25 mm |
| AWG signal line | 22 |
| Conductor cross section | 4x 0.34 mm² |
| Wire diameter incl. insulation | 1.55 mm |
| External cable diameter | 6.50 mm ±0.2 mm |
| Outer sheath, material | PVC |
| External sheath, color | green RAL 6018 |
| Conductor material | Tin-plated Cu litz wires |
| Material wire insulation | PE |
| Single wire, color | white, yellow, blue, orange |
| Thickness, outer sheath | approx. 0.90 mm |
| Overall twist | Star quad |
| Optical shield covering | 85 % |
| Insulation resistance | ≥ 500 MΩ*km |
| Coupling resistance | ≤ 20.00 mΩ/m (at 10 MHz) |
| Loop resistance | ≤ 120.00 Ω/km |
| Wave impedance | 100 Ω ±15 Ω (at 100 MHz) |
| Nominal voltage, cable | 600 V |
| Test voltage Core/Core | 2000 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 2000.00 V (50 Hz, 1 min.) |
| Minimum bending radius, fixed installation | 3 x D |
| Minimum bending radius, flexible installation | 7 x D |
| Smallest bending radius, fixed installation | 20 mm |
| Smallest bending radius, movable installation | 46 mm |
| Near end crosstalk attenuation (NEXT) | 80 dB (with 1 MHz) |
| | 76 dB (at 4 MHz) |
| | 70 dB (at 10 MHz) |
| | 65 dB (at 16 MHz) |

chanhvinh.com

# NBC-M12FSD/ 0,3-93B/R4RC - Network cable

1419998

https://www.phoenixcontact.com/gb/products/1419998

| | |
|---|---|
| | 63 dB (at 20 MHz) |
| | 60 dB (at 31.25 MHz) |
| | 55 dB (at 62.5 MHz) |
| | 50 dB (at 100 MHz) |
| Shield attenuation | 2.1 dB (with 1 MHz) |
| | 4 dB (at 4 MHz) |
| | 6.3 dB (at 10 MHz) |
| | 8 dB (at 16 MHz) |
| | 9 dB (at 20 MHz) |
| | 11.4 dB (at 31.25 MHz) |
| | 16.5 dB (at 62.5 MHz) |
| | 21.3 dB (at 100 MHz) |
| Flame resistance | according to UL 1685 (CSA FT 4) |
| Resistance to oil | Resistant to oil to a limited extent |
| Other resistance | UV resistant (according to UL 1581, Section 1200) |
| Ambient temperature (operation) | -40 °C ... 70 °C (cable, fixed installation) |
| | -40 °C ... 70 °C (Cable, flexible installation) |
| Ambient temperature (installation) | -20 °C ... 60 °C |

chanhvinh.com


# NBC-M12FSD/ 0,3-93B/R4RC - Network cable

1419998

https://www.phoenixcontact.com/gb/products/1419998


## Drawings

Dimensional drawing

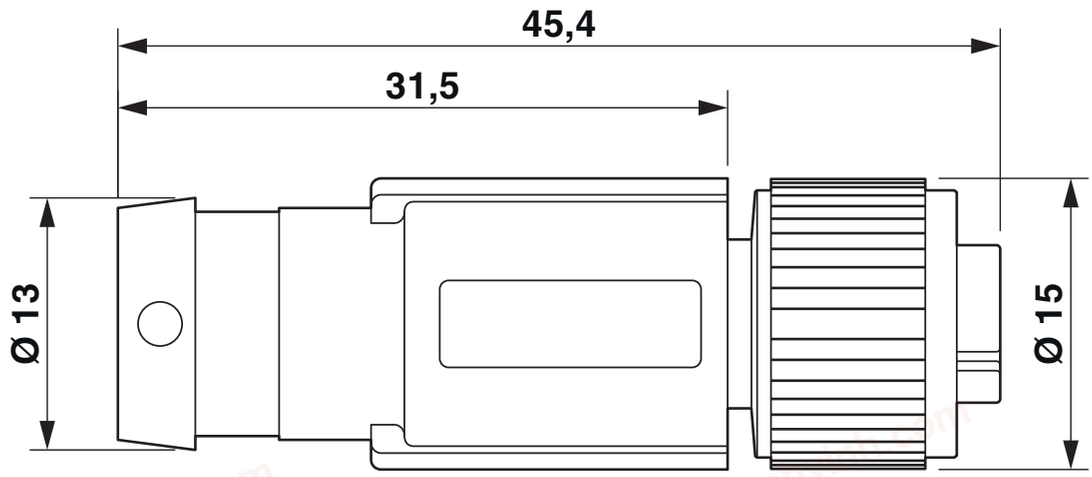


M12 x 1 socket, straight, shielded

Dimensional drawing

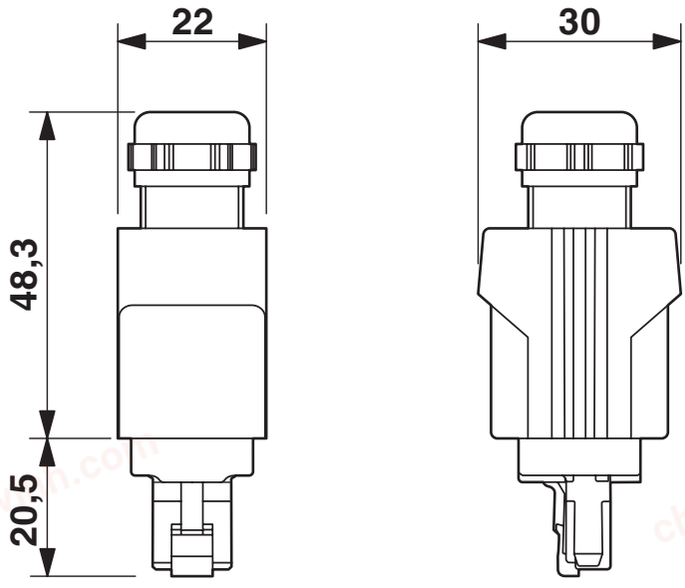


RJ45 Push-Pull connector, IP67


chanhvinh.com

# NBC-M12FSD/ 0,3-93B/R4RC - Network cable

1419998

https://www.phoenixcontact.com/gb/products/1419998

Schematic diagram

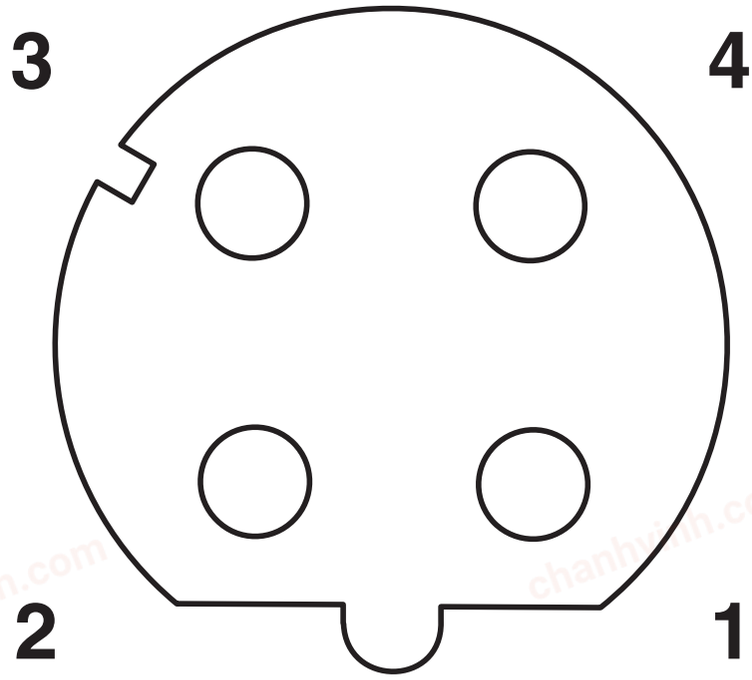


Pin assignment M12 socket, 4-pos., D-coded, female side


chanhvinh.com

# NBC-M12FSD/ 0,3-93B/R4RC - Network cable

1419998

https://www.phoenixcontact.com/gb/products/1419998

Schematic diagram

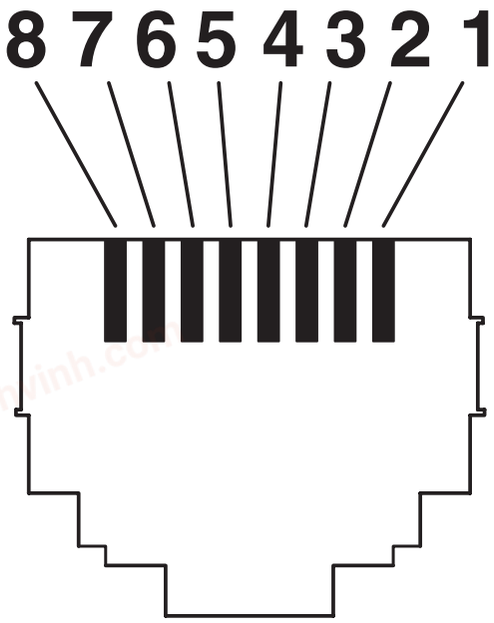


Connector pin assignment plug RJ45


chanhvinh.com

# NBC-M12FSD/ 0,3-93B/R4RC - Network cable

1419998

https://www.phoenixcontact.com/gb/products/1419998

Circuit diagram

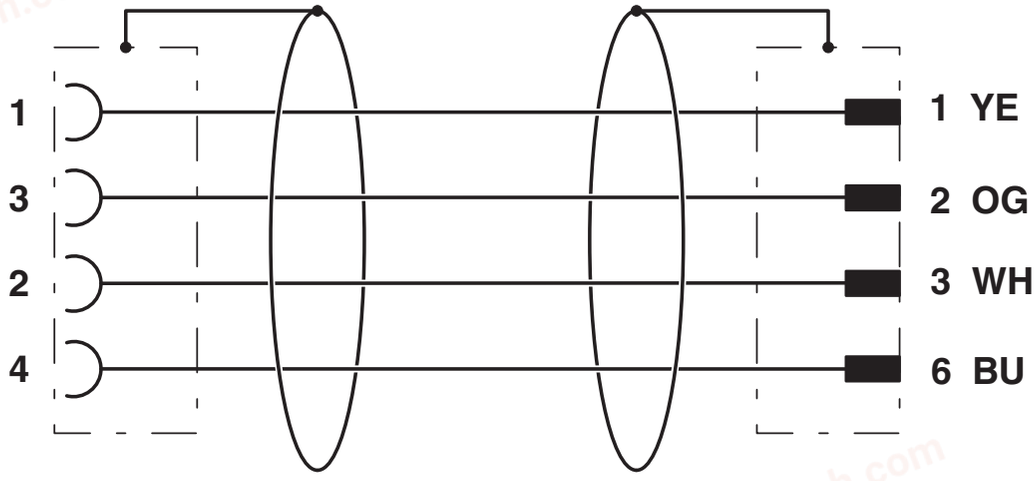


Contact assignment of the M12 socket and the RJ45 plug

chanhvinh.com

# NBC-M12FSD/ 0,3-93B/R4RC - Network cable

1419998

https://www.phoenixcontact.com/gb/products/1419998

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-12.0 | 27060307 |
| ECLASS-13.0 | 27060307 |

### ETIM

| | |
|---|---|
| ETIM 9.0 | EC001855 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 26121600 |

chanhvinh.com

# NBC-M12FSD/ 0,3-93B/R4RC - Network cable

1419998

https://www.phoenixcontact.com/gb/products/1419998

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol(CAS: 119-47-1) |
| | 2-(2H-benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol (UV-329)(CAS: 3147-75-9) |
| SCIP | e9cfc5e5-f5da-4606-bf8f-19bfda6f89a0 |

Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk