chanhvinh.com

# SAC-3P-M12MSS/ 1,5-PVC PE - Power cable

1425623

https://www.phoenixcontact.com/gb/products/1425623

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 3-position, PVC, black, Plug straight M12, coding: S, on free cable end, cable length: 1.5 m, for AC current up to 16 A/230 V

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Protection against incorrect connection using special S-coding

## Commercial data

| | |
|---|---|
| Item number | 1425623 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | AF1CBB |
| Product key | AF1CBB |
| GTIN | 4055626428321 |
| Weight per piece (including packing) | 148.5 g |
| Weight per piece (excluding packing) | 148.5 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

chanhvinh.com

# SAC-3P-M12MSS/ 1,5-PVC PE - Power cable

1425623

https://www.phoenixcontact.com/gb/products/1425623

## Technical data

### Product properties

| | |
|---|---|
| Product type | Power cable |
| Application | Power supply |
| Number of positions | 3 |
| No. of cable outlets | 1 |
| Shielded | no |
| Coding | S |

Insulation characteristics

| | |
|---|---|
| Overvoltage category | III |
| Degree of pollution | 3 |

### Material specifications

| | |
|---|---|
| Flammability rating according to UL 94 | V0 |
| Material of grip body | PP |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA |
| Material for screw connection | Zinc die-cast, nickel-plated |

### Electrical properties

| | |
|---|---|
| Insulation resistance | ≥ 100 MΩ |
| Nominal voltage $U_N$ | 690 V AC |
| Nominal current $I_N$ | 16 A |

### Mechanical properties

Mechanical data

| | |
|---|---|
| Insertion/withdrawal cycles | > 100 |

### Connector

Connection 1

| | |
|---|---|
| Type | Plug straight M12 |
| Coding type | S (Power) |

Connection 2

| | |
|---|---|
| Type | free cable end |

### Cable/line


| | |
|---|---|
| Cable length | 1.5 m |

PVC black [PVC]

# SAC-3P-M12MSS/ 1,5-PVC PE - Power cable

1425623

https://www.phoenixcontact.com/gb/products/1425623

| | |
|---|---|
| Dimensional drawing |  |
| Cable weight | 80 kg/km |
| UL AWM Style | 2517 (105 °C / 300 V) |
| Number of positions | 3 |
| Shielded | no |
| Cable type | PVC black [PVC] |
| Conductor structure, voltage supply | 30x 0.25 mm |
| AWG power supply | 16 |
| Conductor cross section | 3x 1.5 mm² |
| Wire diameter incl. insulation | 2.4 mm ±0.1 mm |
| External cable diameter | 6.80 mm ±0.2 mm |
| Outer sheath, material | PVC |
| External sheath, color | black |
| Conductor material | Bare Cu litz wires |
| Material wire insulation | PVC |
| Single wire, color | black 1, black 2, green/yellow |
| Overall twist | 3 wires, twisted |
| Max. conductor resistance | ≤ 13.3 Ω/km (at 20 °C) |
| Insulation resistance | ≥ 10 MΩ*km (at 20 °C) |
| Nominal voltage, cable | 300 V AC |
| Test voltage | 2000 V AC |
| Minimum bending radius, fixed installation | 5 x D |
| Minimum bending radius, flexible installation | 12 x D |
| Smallest bending radius, fixed installation | 34 mm |
| Smallest bending radius, movable installation | 82 mm |
| Flame resistance | according to IEC 60332-1 |
| | According to DIN EN 60332-1-2 |
| | According to VW-1 |
| | According to FT1 |
| Ambient temperature (operation) | -40 °C ... 90 °C (cable, fixed installation) |
| | -5 °C ... 90 °C (Cable, flexible installation) |

## Environmental and real-life conditions

### Ambient conditions

| | |
|---|---|
| Degree of protection | IP65 |
| | IP67 (without preloading, as additional test in accordance with IEC 60529) |

chanhvinh.com

# SAC-3P-M12MSS/ 1,5-PVC PE - Power cable

1425623

https://www.phoenixcontact.com/gb/products/1425623

| | |
|---|---|
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |

## Standards and regulations

| | |
|---|---|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-111 |

chanhvinh.com


# SAC-3P-M12MSS/ 1,5-PVC PE - Power cable

1425623

https://www.phoenixcontact.com/gb/products/1425623


## Drawings

Dimensional drawing

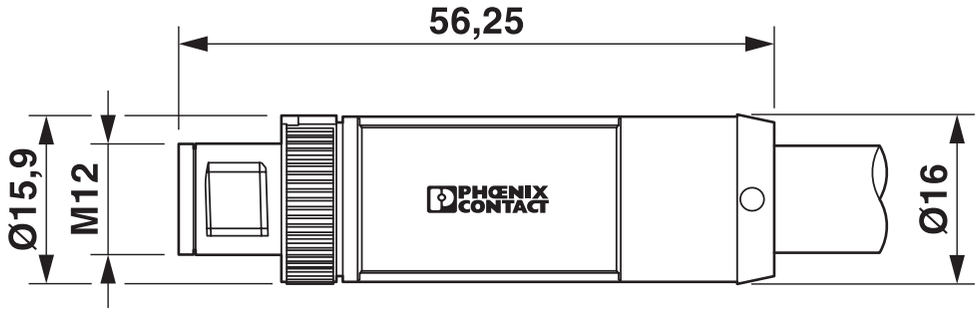


Plug, M12 x 1, straight

Schematic diagram

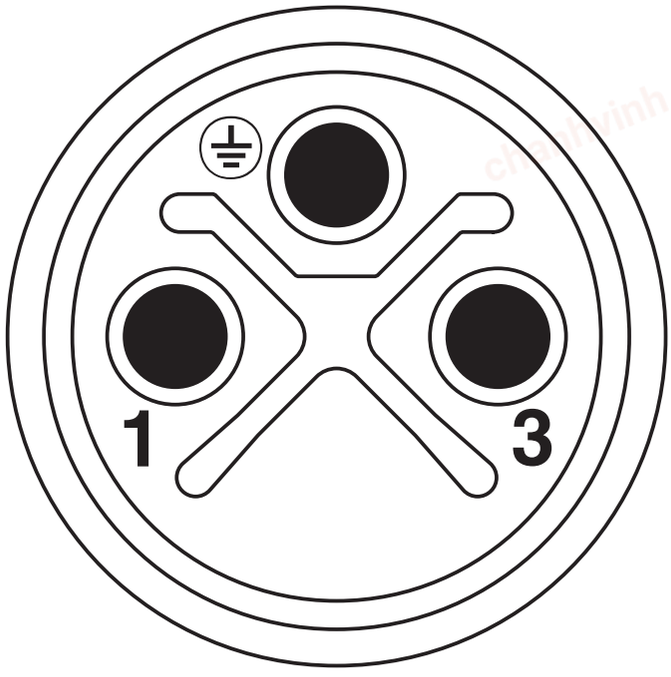


Pin assignment of M12 plug, 3-pos., S-coded, view of pin side

chanhvinh.com

# SAC-3P-M12MSS/ 1,5-PVC PE - Power cable

1425623

https://www.phoenixcontact.com/gb/products/1425623

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/gb/products/1425623

**UL Listed**
Approval ID: FILE E 468743

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| | 300 V | 12 A | - | - 16 |

**cUL Listed**
Approval ID: FILE E 468743

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| | 300 V | 12 A | - 16 | - |

**cULus Listed**

chanhvinh.com

# SAC-3P-M12MSS/ 1,5-PVC PE - Power cable

1425623

https://www.phoenixcontact.com/gb/products/1425623

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060327 |

### ETIM

| | |
|---|---|
| ETIM 9.0 | EC001855 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 26121600 |

chanhvinh.com

# SAC-3P-M12MSS/ 1,5-PVC PE - Power cable

1425623

https://www.phoenixcontact.com/gb/products/1425623

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk