chanhvinh.com

SAC-5P- 5,0-PUR/AD-2L - Sensor/actuator cable

1435108

https://www.phoenixcontact.com/gb/products/1435108

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 5-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Valve connector AD (pressure switch), with 2 LEDs, Wiring: unwired, cable length: 5 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Our standard: robust halogen-free PUR cable

Commercial data

Item number	1435108
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF1DBA
Product key	BF1DBA
Catalog page	Page 240 (C-2-2019)
GTIN	4046356413466
Weight per piece (including packing)	249.4 g
Weight per piece (excluding packing)	238 g
Customs tariff number	85444290
Country of origin	PL

SAC-5P- 5,0-PUR/AD-2L - Sensor/actuator cable

1435108

https://www.phoenixcontact.com/gb/products/1435108

Technical data

Product properties

Product type	Sensor/actuator cable with valve connector
Application	Standard
Number of positions	5
No. of cable outlets	1
Shielded	no

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Seal material	TPU
Material housing valve plug	TPU
Contact material	CuSn
Valve plug contact insert material	PA 6
Contact surface material	Sn

Electrical properties

Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	24 V DC
Nominal current I_N	4 A

Valve connector characteristics

Fixing screws	M3 x 29

Signaling

Status display	2 LEDs
Status display present	Yes

Connector

Connection 1

Type	free cable end

Connection 2

Type	Valve connector AD (pressure switch)
Material	CuSn (Contact)
	Sn (Contact surface)
	PA 6 (Contact carriers)
	TPU (Housing)

Cable/line

chanhvinh.com


SAC-5P- 5,0-PUR/AD-2L - Sensor/actuator cable

1435108

https://www.phoenixcontact.com/gb/products/1435108

Cable length	5 m

PUR halogen-free black [PUR]

Dimensional drawing	
Cable weight	44.8 kg/km
UL AWM Style	20549
Number of positions	5
Shielded	no
Cable type	PUR halogen-free black [PUR]
Conductor structure signal line	28x 0.15 mm
AWG signal line	20
Conductor cross section	5x 0.5 mm²
Wire diameter incl. insulation	1.5 mm ±0.05 mm (Signal line)
External cable diameter	5.30 mm ±0.02 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	black 1, black 2, black 3, black 4, green/yellow
Overall twist	5 cores, twisted
Max. conductor resistance	39 Ω/km (at 20 °C)
Insulation resistance	min. 20 MΩ*km
Nominal voltage, cable	≤ 300 V
Test voltage	≥ 1200 V
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	10 x D
Smallest bending radius, fixed installation	26.5 mm
Smallest bending radius, movable installation	53 mm
Dynamic load capacity (bending)	Max. bending cycles: 15000000, Bending radius: 50 mm, Traversing path: 0.9 m, Traversing rate: 5 m/s, Acceleration: 30 m/s²
Halogen-free	in accordance with DIN VDE 0472 part 815
Flame resistance	in accordance with DIN UL-Style 20549
Resistance to oil	in accordance with DIN EN 60811-2-1
Other resistance	Highly resistant to acids, alkaline solutions and solvents
	hydrolysis and microbe resistant
	largely oil-resistant
	partly UV-resistant (in accordance with DIN EN ISO 4892-2-A)

chanhvinh.com

SAC-5P- 5,0-PUR/AD-2L - Sensor/actuator cable

1435108

https://www.phoenixcontact.com/gb/products/1435108

Special properties	Flexible cable conduit capable
	Silicone-free
	Free of substances which would hinder coating with paint or varnish
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
	-20 °C ... 80 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-20 °C ... 85 °C (valve plug)
	-40 °C ... 80 °C (cable, fixed installation)
	-15 °C ... 80 °C (Cable, flexible installation)

Standards and regulations

Valve connector

Standard designation	Valve connector
Standards/specifications	EN 175301-803

chanhvinh.com


SAC-5P- 5,0-PUR/AD-2L - Sensor/actuator cable

1435108

https://www.phoenixcontact.com/gb/products/1435108

Drawings

Dimensional drawing

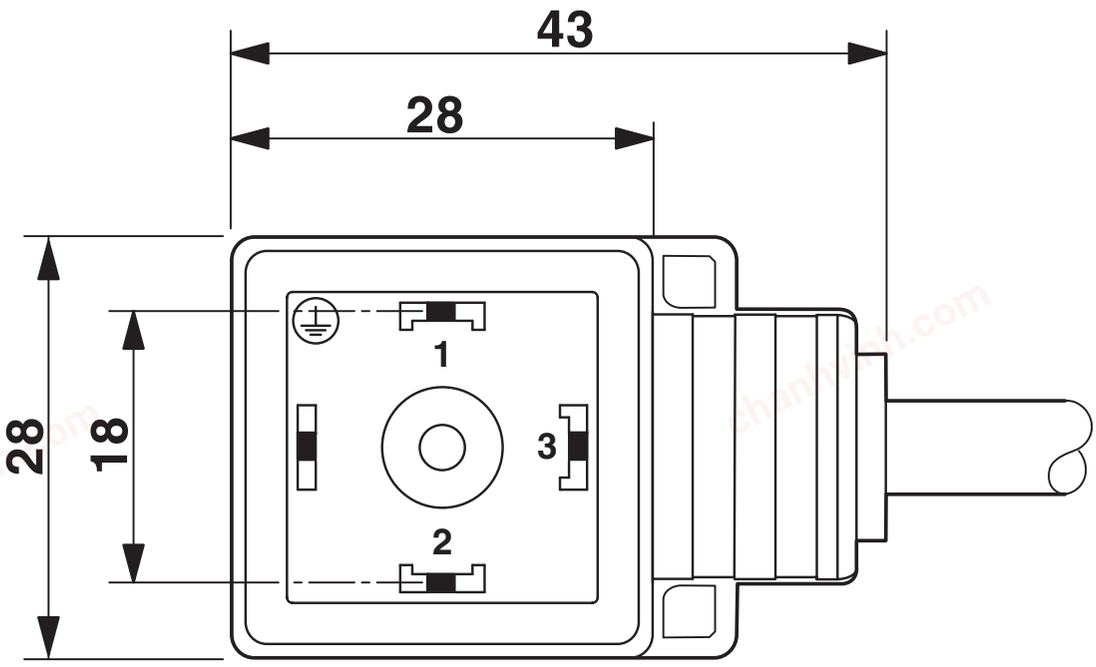

Valve connector, type AD


chanhvinh.com

SAC-5P- 5,0-PUR/AD-2L - Sensor/actuator cable

1435108


https://www.phoenixcontact.com/gb/products/1435108

Schematic diagram

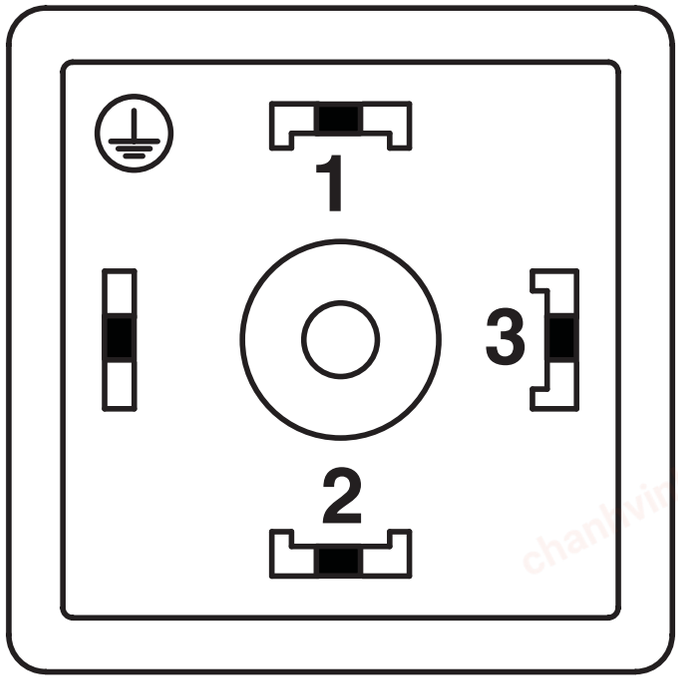

Valve plug connector pin assignment, type AD

Dimensional drawing

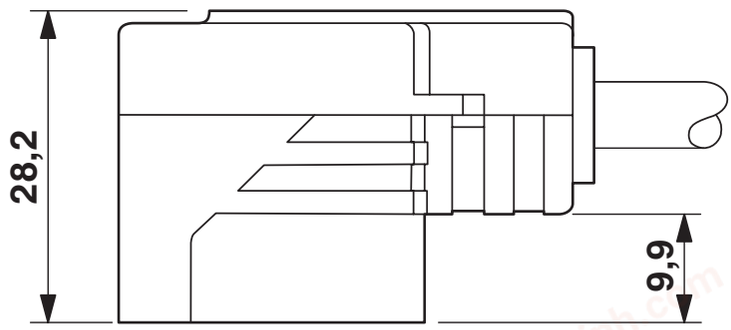

Valve connector, type AD, side view


chanhvinh.com

SAC-5P- 5,0-PUR/AD-2L - Sensor/actuator cable

1435108

https://www.phoenixcontact.com/gb/products/1435108

Circuit diagram

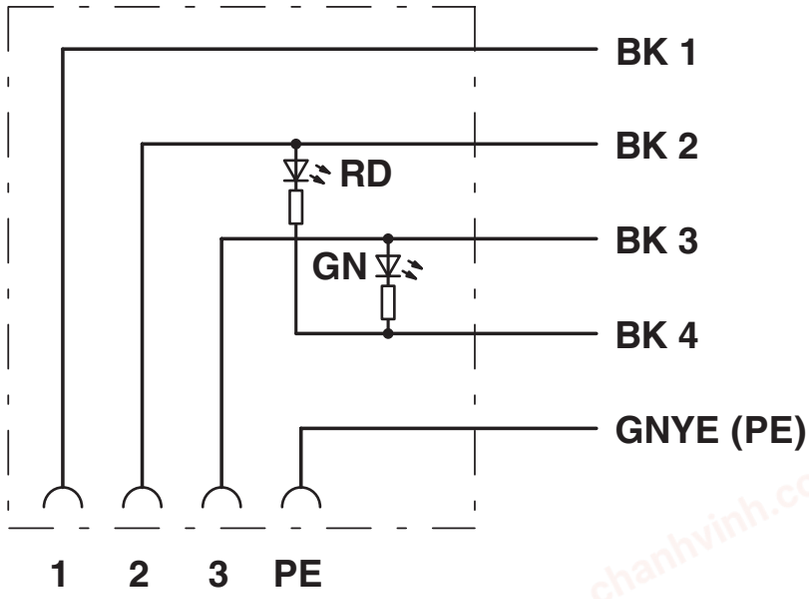

chanhvinh.com

SAC-5P- 5,0-PUR/AD-2L - Sensor/actuator cable

1435108

https://www.phoenixcontact.com/gb/products/1435108

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/gb/products/1435108

EAC-RoHS
Approval ID: RU D-DE.HB35.B.00387

CSAus
Approval ID: 13631

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	24 V	6 A	-	-

chanhvinh.com

SAC-5P- 5,0-PUR/AD-2L - Sensor/actuator cable

1435108

https://www.phoenixcontact.com/gb/products/1435108

Classifications

ECLASS

ECLASS-11.0	27060312
ECLASS-12.0	27060312
ECLASS-13.0	27060312

ETIM

ETIM 9.0	EC001855

UNSPSC

UNSPSC 21.0	31251500

chanhvinh.com

SAC-5P- 5,0-PUR/AD-2L - Sensor/actuator cable

1435108

https://www.phoenixcontact.com/gb/products/1435108

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

EF3.0 Climate Change

CO2e kg	0.898 kg CO2e

Phoenix Contact 2024 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk