chanhvinh.com

Sensor/actuator cable - SAC-3P-10,0-PVC/A-1L-Z

1439492

https://www.phoenixcontact.com/gb/products/1439492

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Sensor/actuator cable, 3-position, PVC, black RAL 9005, free cable end, on Valve connector A, with 1 LED, connected with Z diode, cable length: 10 m

Your advantages

- Easy and safe: 100% electrically tested plug-in components
- Convenient: increased machine availability thanks to quick and easy diagnostics

Commercial Data

Item number	1439492
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BF1DAA
Product Key	BF1DAA
Catalog Page	Page 229 (C-2-2019)
GTIN	4046356489379
Weight per Piece (including packing)	404.3 g
Weight per Piece (excluding packing)	362.6 g
Customs tariff number	85444290
Country of origin	PL

chanhvinh.com

Sensor/actuator cable - SAC-3P-10,0-PVC/A-1L-Z

1439492

https://www.phoenixcontact.com/gb/products/1439492

Technical Data

Product properties

Product type	Sensor/actuator cable with valve connector
Number of positions	3
Application	Standard
No. of cable outlets	1
Shielded	no

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	24 V AC
	24 V DC
Nominal current I_N	4 A
Protective circuit	Z diode

LED signaling

Status display	1 LED
Status display present	yes

Material specifications

Color Handle area	black
Flammability rating according to UL 94	V0
Sealing material	TPU (Seal molded)
Material housing valve plug	TPU
Contact material	CuSn
Valve plug contact insert material	PA 6.6
Contact surface material	Sn

Connector

Connection 1

Head design	free cable end

Head 2

Head design	Valve connector
Head thread type	A
Status indicator head	1 LED

Cable / line

chanhvinh.com

Sensor/actuator cable - SAC-3P-10,0-PVC/A-1L-Z

1439492

https://www.phoenixcontact.com/gb/products/1439492

Cable length	10 m
UL AWM Style	2464
Number of positions	3
Shielded	no
Cable type	PVC black [PVC]
Conductor structure signal line	16x 0.20 mm
AWG signal line	20
Conductor cross section	3x 0.5 mm²
Wire diameter incl. insulation	1.5 mm ±0.05 mm
External cable diameter	4.8 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	black 1, black 2, green/yellow
Overall twist	3 wires, twisted
Max. conductor resistance	39 Ω/km (at 20 °C)
Insulation resistance	≥ 20 MΩ*km
Nominal voltage, cable	300 V
Test voltage	1200 V
Minimum bending radius, fixed installation	5 x D
Flame resistance	DIN VDE 0482
	DIN EN 50265-2-1
Resistance to oil	in accordance with DIN EN 60811-2-1
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
	-5 °C ... 80 °C (Cable, flexible installation)

Cable structure

Cable type	PVC black
Outer sheath, material	PVC
External sheath, color	black RAL 9005

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-20 °C ... 85 °C (valve plug)

Standards and regulations

Valve connector

Standards/specifications	EN 175301-803

chanhvinh.com


Sensor/actuator cable - SAC-3P-10,0-PVC/A-1L-Z

1439492

https://www.phoenixcontact.com/gb/products/1439492


Drawings

Dimensional drawing

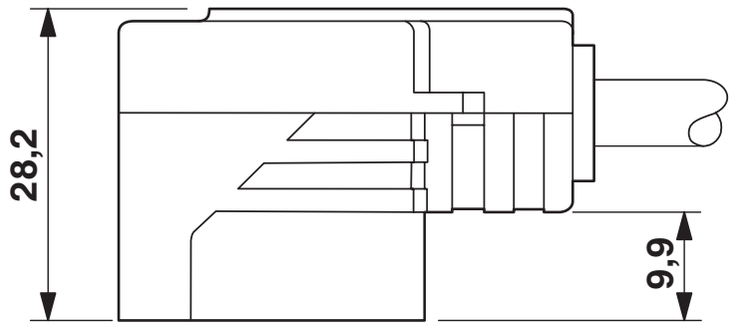

Valve connector, type A, side view

Circuit diagram

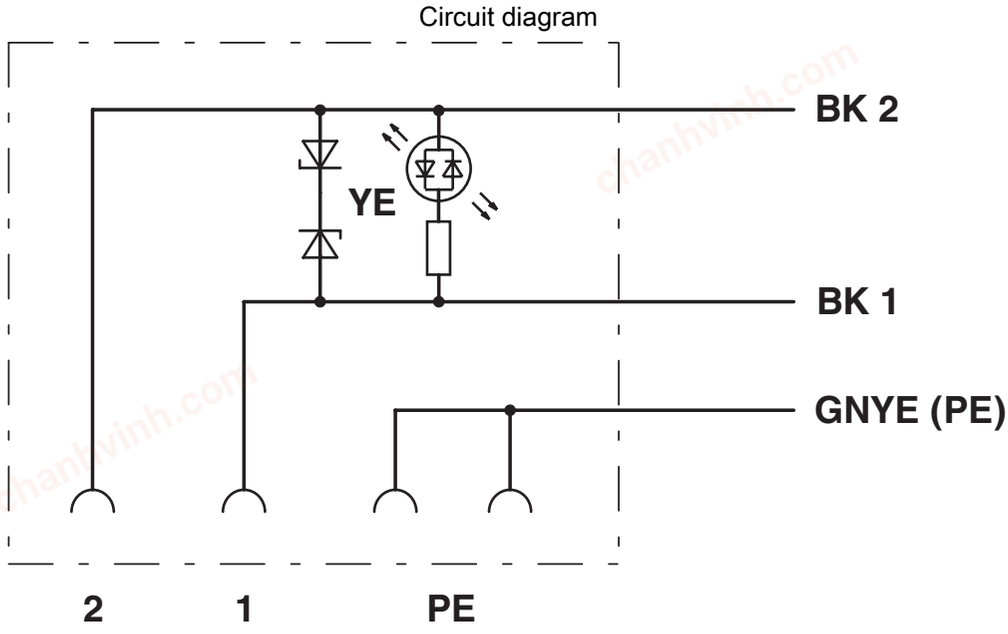

Contact assignment of the valve plug


chanhvinh.com

Sensor/actuator cable - SAC-3P-10,0-PVC/A-1L-Z

1439492


https://www.phoenixcontact.com/gb/products/1439492

Dimensional drawing

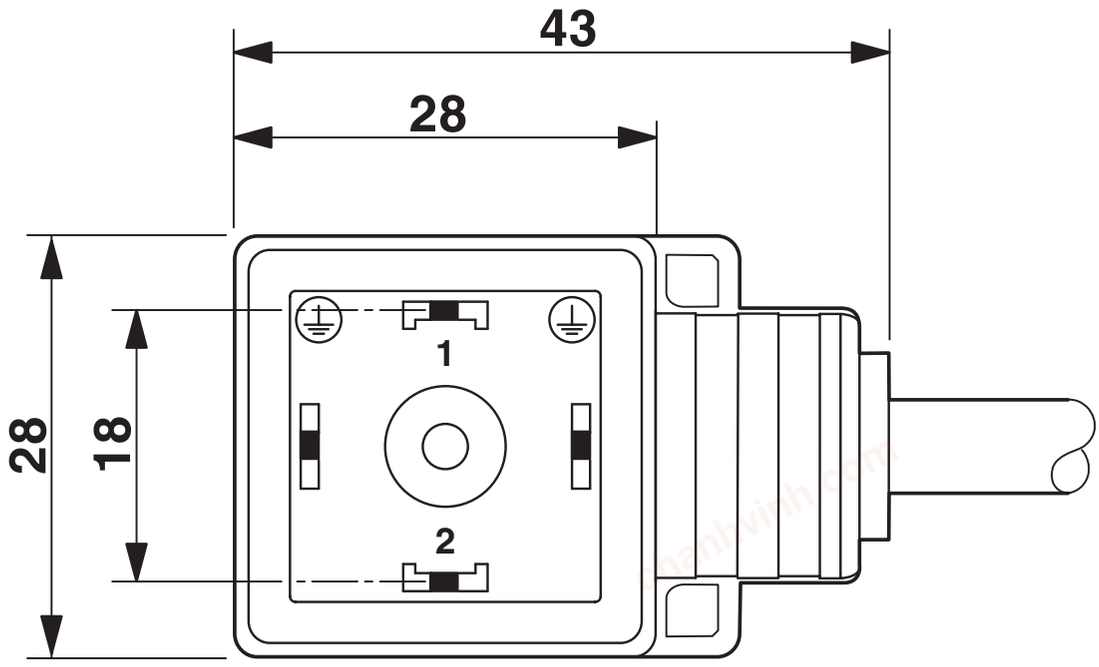

Valve connector, type A

Schematic diagram

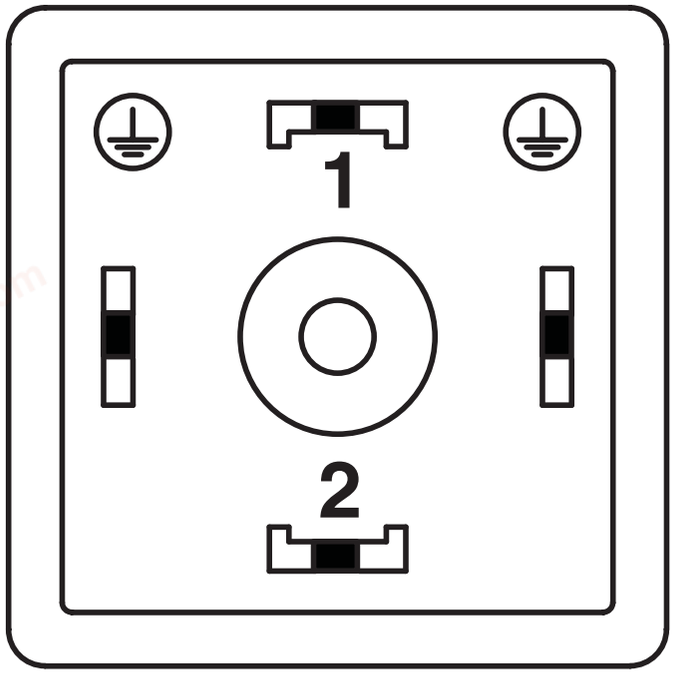

Valve connector pin assignment, type A

chanhvinh.com

Sensor/actuator cable - SAC-3P-10,0-PVC/A-1L-Z

1439492

https://www.phoenixcontact.com/gb/products/1439492

Approvals

CSA
Approval ID: 13631

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	24 V	4 A	-	-

EAC
Approval ID: RU D-DE.HB35.B.00387

CSAus
Approval ID: 13631

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	24 V	4 A	-	-

cCSAus

chanhvinh.com

Sensor/actuator cable - SAC-3P-10,0-PVC/A-1L-Z

1439492

https://www.phoenixcontact.com/gb/products/1439492

Classifications

ECLASS

ECLASS-9.0	27060312
ECLASS-10.0.1	27060312
ECLASS-11.0	27060312

ETIM

ETIM 8.0	EC001855

UNSPSC

UNSPSC 21.0	31251500

chanhvinh.com

Sensor/actuator cable - SAC-3P-10,0-PVC/A-1L-Z

1439492

https://www.phoenixcontact.com/gb/products/1439492

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer’s declaration available under “Downloads”

chanhvinh.com

Sensor/actuator cable - SAC-3P-10,0-PVC/A-1L-Z

1439492

https://www.phoenixcontact.com/gb/products/1439492

Accessories

Screw

Screw - SAC-V-SCREW-M3-29 KNURL - 1403779

https://www.phoenixcontact.com/gb/products/1403779



Fillister head screw with plastic knurl, M3 x 40

Phoenix Contact 2022 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk