chanhvinh.com

Bus system cable - SAC-5P-M12MS/ 4,0-920/M12FS

1514472

https://www.phoenixcontact.com/gb/products/1514472

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Bus system cable, CANopen®, DeviceNet™, 5-position, PUR halogen-free, red lilac RAL 4001, shielded, Plug straight M12, coding: A, on Socket straight M12, coding: A, cable length: 4 m

Commercial Data

Item number	1514472
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BF1CKD
Product Key	BF1CKD
GTIN	4017918918408
Weight per Piece (including packing)	266.1 g
Weight per Piece (excluding packing)	266.1 g
Customs tariff number	85444290
Country of origin	PL

chanhvinh.com

Bus system cable - SAC-5P-M12MS/ 4,0-920/M12FS

1514472

https://www.phoenixcontact.com/gb/products/1514472

Technical Data

Product properties

Product type	Data cable preassembled
Number of positions	5
No. of cable outlets	1
Shielded	yes
Coding	A - standard

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Interfaces

Bus system	CANopen®/DeviceNet™
Signal type/category	CANopen®
	DeviceNet™
	CANopen®
	DeviceNet™

LED signaling

Status display	No
Status display present	No

Electrical properties

Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	48 V AC
	60 V DC
Nominal current I_N	4 A

Material specifications

Flammability rating according to UL 94	HB
Sealing material	NBR
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Cable gland material	Zinc die-cast, nickel-plated

Connector

Insertion/withdrawal cycles	≥ 100

Header 1

Head design	Plug

chanhvinh.com

Bus system cable - SAC-5P-M12MS/ 4,0-920/M12FS

1514472

https://www.phoenixcontact.com/gb/products/1514472

Head cable outlet	straight
Head thread type	M12
Coding	A

Head 2

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Coding	A

Cable / line

Cable length	4 m
Cable weight	90 kg/km
UL AWM Style	21198 (80°C/300 V)
Number of positions	4
Shielded	yes
Cable type	CANopen®/DeviceNet™, PUR, violet [920]
Conductor structure signal line	19x 0.13 mm
AWG signal line	24
Conductor cross section	2x 0.25 mm² (Data cable)
	2x 0.34 mm² (Power supply)
	1x 0.34 mm² (Drain wire)
Wire diameter incl. insulation	1.95 mm ±0.05 mm (Data cable)
	1.4 mm ±0.05 mm (Power supply)
External cable diameter	6.7 mm ±0.3 mm
Outer sheath, material	PUR
External sheath, color	red lilac RAL 4001
Conductor material	Tin-plated Cu litz wires
Material wire insulation	Foamed PE (Data cable)
	PE (Power supply)
Single wire, color	red-black, blue-white
Twisted pairs	2 cores to the pair
Type of pair shielding	Plastic-coated aluminum foil, aluminum side outside
Overall twist	2 pairs around a drain wire in the center to the core
Optical shield covering	80 %
Insulation resistance	≥ 5 GΩ*km (Data cable)
	≥ 5 GΩ*km (Power supply)
Loop resistance	≤ 181.80 Ω/km (Data cable)
	≤ 114.80 Ω/km (Power supply)
Wave impedance	120 Ω ±10 % (with 1 MHz)
Cable capacity	nom. 40 nF/km (Data cable)
Nominal voltage, cable	≤ 300 V (Peak value, not for high-power applications)
Test voltage Core/Core	2000 V (50 Hz, 1 min.)
Test voltage Core/Shield	2000 V (50 Hz, 1 min.)

chanhvinh.com

Bus system cable - SAC-5P-M12MS/ 4,0-920/M12FS

1514472

https://www.phoenixcontact.com/gb/products/1514472

Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	10 x D
Max. bending cycles	5000000
Shield attenuation	≤ 22.9 dB/km (with 1 MHz)
	≤ 16.4 dB/km (At 500 kHz)
	≤ 9.5 dB/km (At 125 kHz)
Halogen-free	in accordance with DIN VDE 0472 part 815
	according to IEC 60754-1
Flame resistance	IEC 60332-1-2
	in accordance with ISO 6722-1 5.22 (UN ECE-R 118.01)
Other resistance	Low adhesion
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
	-30 °C ... 70 °C (Cable, flexible installation)
	-20 °C ... 60 °C (for installation)
	-20 °C ... 60 °C (cable, drag chain applications)

Cable structure

Cable type	CANopen®/DeviceNet™, PUR, violet
Signal type/category	CANopen®
	DeviceNet™
External cable diameter	6.70 mm
Outer sheath, material	PUR
External sheath, color	red lilac RAL 4001
Conductor material	Tin-plated Cu litz wires
Conductor structure signal line	19x 0.12 mm
AWG signal line	24
Conductor structure, voltage supply	19x 0.15 mm
AWG power supply	22
Material wire insulation	PE (Power supply)
	Foamed PE (Signal line)
Wire diameter incl. insulation	2.05 mm ±0.1 mm (Signal line)
	1.4 mm ±0.05 mm (Power supply)
Single wire, color	red-black, blue-white
Twisted pairs	2 cores to the pair
Type of pair shielding	Aluminum-lined polyester foil
Overall twist	2 pairs around a drain wire in the center to the core
Shielding	Tinned copper braided shield
Optical shield covering	70 %

Electrical properties

Nominal voltage, cable	300 V (Power supply)
	30 V (Signal line)
Test voltage, cable	1500 V (Signal line)
	2000 V (Power supply)
Conductor resistance	≤ 78.4 Ω/km (Signal line)

chanhvinh.com

Bus system cable - SAC-5P-M12MS/ 4,0-920/M12FS

1514472

https://www.phoenixcontact.com/gb/products/1514472

	≥ 51.6 Ω/km (Power supply)
Cable insulation resistance	≥ 5 GΩ*km (Signal line)
	≥ 100 MΩ*km (Power supply)
Working capacitance	39.3 pF (Signal line, Core-Core)
	78.7 pF (Signal line, Core-Shield)

Mechanical properties

Smallest bending radius, fixed installation	67 mm
Smallest bending radius, movable installation	67 mm
Number of bending cycles	5000000
Bending radius	67 mm
Traversing path	10 m
Traversing rate	3 m/s
Acceleration	7 m/s²

Bending cycles

Smallest bending radius, fixed installation	67 mm
Smallest bending radius, movable installation	67 mm
Number of bending cycles	5000000
Bending radius	67 mm
Traversing path	10 m
Traversing rate	3 m/s
Acceleration	7 m/s²

Ambient conditions

Degree of protection	IP65
	IP67
	IP68
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
	-40 °C ... 80 °C (cable, fixed installation)
	-20 °C ... 75 °C (Cable, flexible installation)

chanhvinh.com


Bus system cable - SAC-5P-M12MS/ 4,0-920/M12FS

1514472

https://www.phoenixcontact.com/gb/products/1514472


Drawings

Schematic diagram

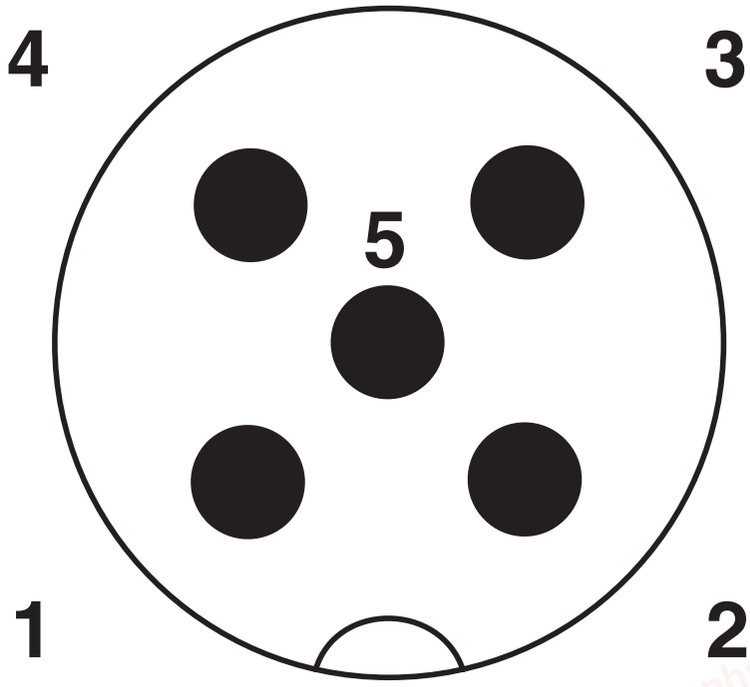

Pin assignment M12 male connector, 5-pos., A-coded, male side

Circuit diagram

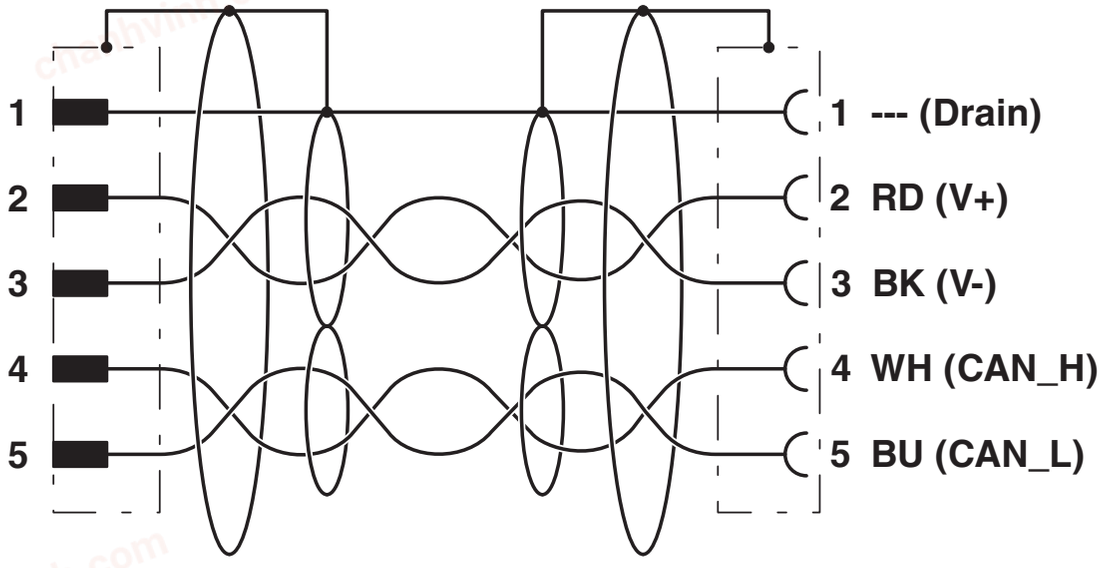

Contact assignment of the M12 connector and the M12 socket


chanhvinh.com

Bus system cable - SAC-5P-M12MS/ 4,0-920/M12FS

1514472


https://www.phoenixcontact.com/gb/products/1514472

Dimensional drawing

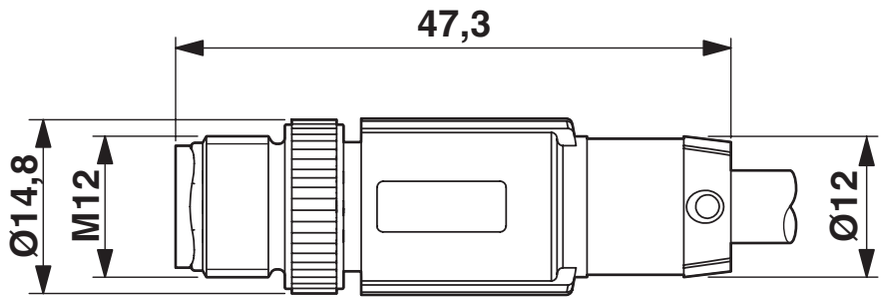

Plug, M12 x 1, straight, shielded

Dimensional drawing

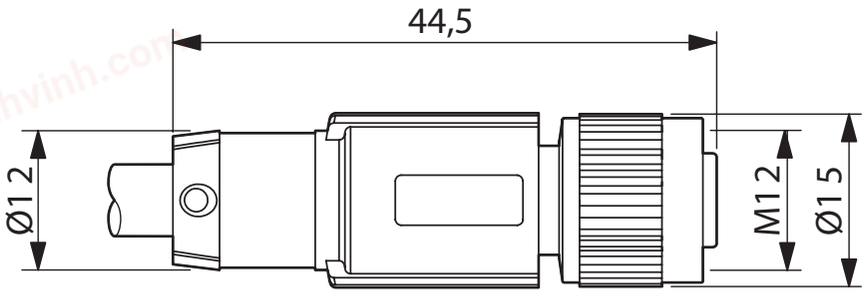

M12 x 1 socket, straight, shielded


chanhvinh.com

Bus system cable - SAC-5P-M12MS/ 4,0-920/M12FS

1514472

https://www.phoenixcontact.com/gb/products/1514472

Schematic diagram

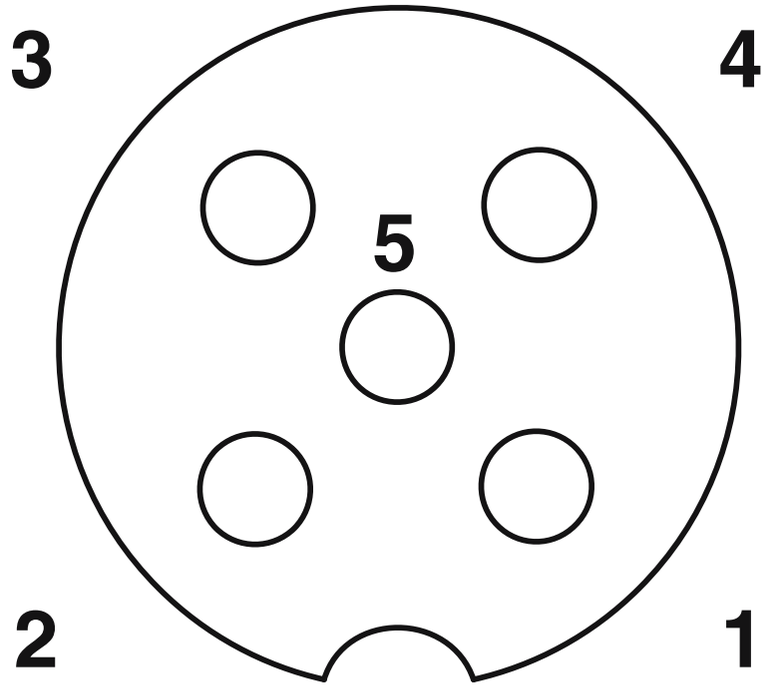

Pin assignment M12 socket, 5-pos., A-coded, socket side view

chanhvinh.com

Bus system cable - SAC-5P-M12MS/ 4,0-920/M12FS

1514472

https://www.phoenixcontact.com/gb/products/1514472

Approvals

EAC

chanhvinh.com

Bus system cable - SAC-5P-M12MS/ 4,0-920/M12FS

1514472

https://www.phoenixcontact.com/gb/products/1514472

Classifications

ECLASS

ECLASS-9.0	27060311
ECLASS-10.0.1	27060311
ECLASS-11.0	27060307

ETIM

ETIM 8.0	EC001855

UNSPSC

UNSPSC 21.0	26121600

chanhvinh.com

Bus system cable - SAC-5P-M12MS/ 4,0-920/M12FS

1514472

https://www.phoenixcontact.com/gb/products/1514472

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2022 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk