chanhvinh.com

# SAC-4P-M 8MR/ 0,3-950/M 8FR - Bus system cable

1550960

https://www.phoenixcontact.com/gb/products/1550960

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Bus system cable, INTERBUS, 4-position, PUR halogen-free, black RAL 9005, shielded, Plug angled M8, coding: A, on Socket angled M8, coding: A, cable length: 0.3 m

## Your advantages

- System cable for supply voltage and bus signal
- Power cable for actuator voltage

## Commercial data

| | |
|---|---|
| Item number | 1550960 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | BF1BJA |
| Product key | BF1BJB |
| Catalog page | Page 200 (C-6-2019) |
| GTIN | 4046356151498 |
| Weight per piece (including packing) | 37.3 g |
| Weight per piece (excluding packing) | 33.2 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

chanhvinh.com

# SAC-4P-M 8MR/ 0,3-950/M 8FR - Bus system cable

1550960

https://www.phoenixcontact.com/gb/products/1550960

## Technical data

### Product properties

| | |
|---|---|
| Product type | Data cable preassembled |
| Application | Standard |
| Sensor type | INTERBUS |
| Number of positions | 4 |
| No. of cable outlets | 1 |
| Shielded | yes |
| Coding | A |

Insulation characteristics

| | |
|---|---|
| Overvoltage category | II |
| Degree of pollution | 3 |

### Interfaces

| | |
|---|---|
| Bus system | INTERBUS |
| Signal type/category | INTERBUS |

### Signaling

| | |
|---|---|
| Status display | no |
| Status display present | No |

### Electrical properties

| | |
|---|---|
| Insulation resistance | ≥ 100 MΩ |
| Nominal voltage $U_N$ | 48 V AC |
| | 60 V DC |
| Nominal current $I_N$ | 4 A |
| Test voltage | 800 V |
| Transmission medium | Copper |

### Material specifications

| | |
|---|---|
| Flammability rating according to UL 94 | HB |
| Seal material | NBR |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |

### Connection data

Pin assignment

| | |
|---|---|
| Contact \| Color (signal designation) \| Contact (optional) | 1 (Plug) \| RD (0.34 mm²) \| 1 (Socket) |
| | 3 (Plug) \| BU (0.34 mm²) \| 3 (Socket) |

chanhvinh.com

# SAC-4P-M 8MR/ 0,3-950/M 8FR - Bus system cable

1550960

https://www.phoenixcontact.com/gb/products/1550960

| | |
|---|---|
| | 2 (Plug) \| YE (0.14 mm²) \| 2 (Socket) |
| | 4 (Plug) \| GN (0.14 mm²) \| 4 (Socket) |

## Connector

### Connection 1

| | |
|---|---|
| Type | Plug angled M8 |
| Number of positions | 4 |
| Coding type | A (Standard) |

### Connection 2

| | |
|---|---|
| Type | Socket angled M8 |
| Number of positions | 4 |
| Coding type | A |

## Cable/line

| | |
|---|---|
| Cable length | 0.3 m |

### INTERBUS [950]

| | |
|---|---|
| Cable weight | 41 kg/km |
| UL AWM Style | 20963 (80°C/30 V) |
| Number of positions | 4 |
| Shielded | yes |
| Cable type | INTERBUS [950] |
| Conductor structure | 2xAWG26/19+2xAWG22/19 |
| Conductor structure signal line | 19x 0.10 mm |
| AWG signal line | 26 |
| Conductor cross section | 2x 0.14 mm² (Signal line) |
| | 2x 0.34 mm² (Power supply) |
| | 1x 0.38 mm² (Drain wire) |
| Wire diameter incl. insulation | 0.97 mm (Signal line) |
| | 1.25 mm (Power supply) |
| External cable diameter | 5.20 mm ±0.2 mm |
| Outer sheath, material | PUR |
| External sheath, color | black RAL 9005 |
| Conductor material | Tin-plated Cu litz wires |
| Material wire insulation | PP |
| Single wire, color | red-blue, green-yellow |
| Thickness, insulation | 0.24 mm (Conductor insulation, signal line) |
| | 0.25 mm (Conductor insulation, voltage supply) |
| Thickness, outer sheath | approx. 0.75 mm |
| Twisted pairs | 2 cores to the pair |
| Type of pair shielding | Aluminum-lined polyester foil |
| Overall twist | 2 pairs around a drain wire in the center to the core |
| Optical shield covering | 85 % |
| Max. conductor resistance | ≤ 150 Ω/km (Signal line) |

chanhvinh.com

# SAC-4P-M 8MR/ 0,3-950/M 8FR - Bus system cable

1550960

https://www.phoenixcontact.com/gb/products/1550960

| | |
|---|---|
| | ≤ 58 Ω/km (Power supply) |
| Insulation resistance | ≥ 20 MΩ*km |
| Wave impedance | 75 Ω ±10 Ω (Signal line) |
| | 55 Ω ±10 Ω (Power supply) |
| Nominal voltage, cable | ≤ 100 V |
| Test voltage Core/Core | 1000 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 1000.00 V (50 Hz, 1 min.) |
| Minimum bending radius, fixed installation | 5 x D |
| Minimum bending radius, flexible installation | 7.5 x D |
| Smallest bending radius, fixed installation | 26 mm |
| Smallest bending radius, movable installation | 39 mm |
| Dynamic load capacity (bending) | Max. bending cycles: 1000000, Bending radius: 110 mm, Traversing path: 6 m, Traversing rate: 4 m/s, Acceleration: 4 m/s² |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -40 °C ... 80 °C (Cable, flexible installation) |

## Environmental and real-life conditions

### Ambient conditions

| | |
|---|---|
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |

chanhvinh.com


# SAC-4P-M 8MR/ 0,3-950/M 8FR - Bus system cable

1550960

https://www.phoenixcontact.com/gb/products/1550960


## Drawings

Schematic diagram

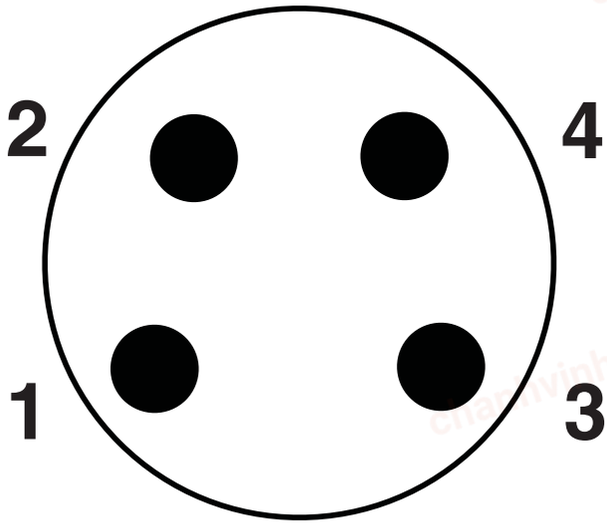


Pin assignment M8 plug, 4-pos., view male side

Schematic diagram

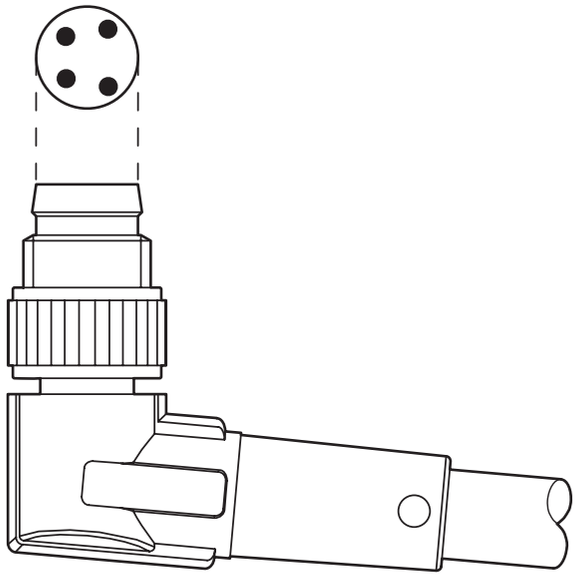

Layout of connector pin assignments


chanhvinh.com

# SAC-4P-M 8MR/ 0,3-950/M 8FR - Bus system cable

1550960


https://www.phoenixcontact.com/gb/products/1550960

Schematic diagram

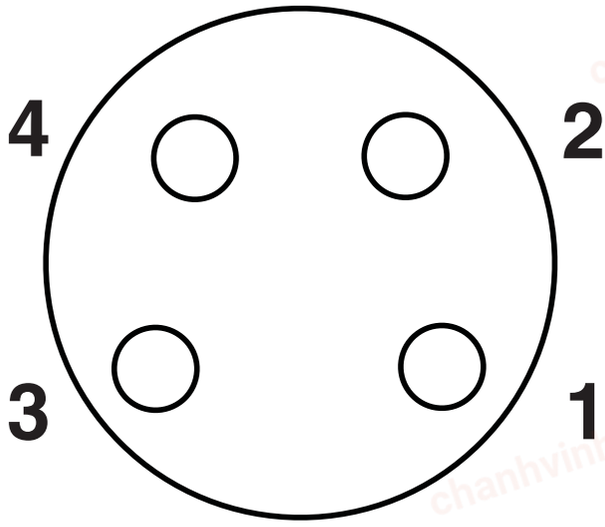


Pin assignment M8 socket, 4-pos., view female side

Dimensional drawing

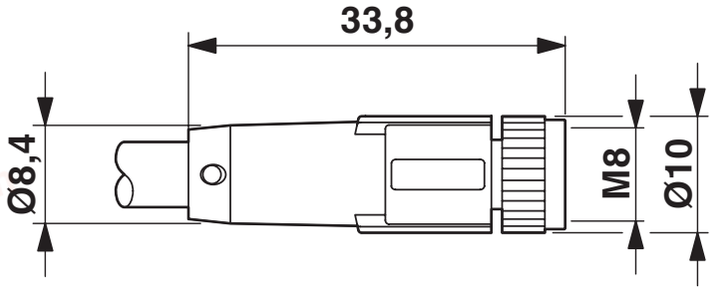


Socket M8 x 1, angled, shielded


chanhvinh.com

# SAC-4P-M 8MR/ 0,3-950/M 8FR - Bus system cable

1550960


https://www.phoenixcontact.com/gb/products/1550960

Dimensional drawing

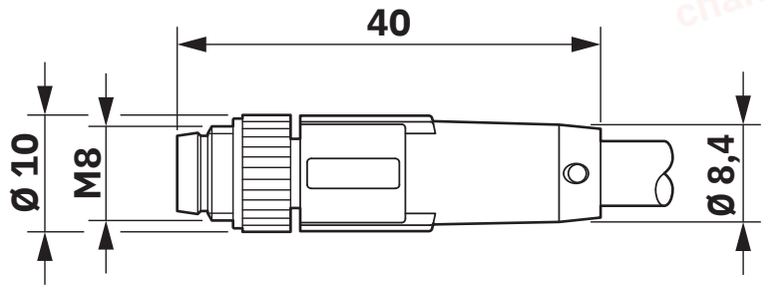


Plug M8 x 1, angled, shielded

Schematic diagram

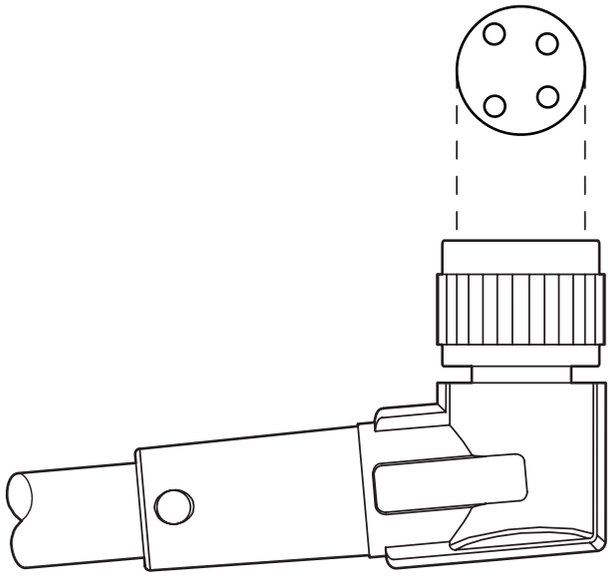

Layout of connector pin assignments


chanhvinh.com

# SAC-4P-M 8MR/ 0,3-950/M 8FR - Bus system cable

1550960

https://www.phoenixcontact.com/gb/products/1550960

Circuit diagram

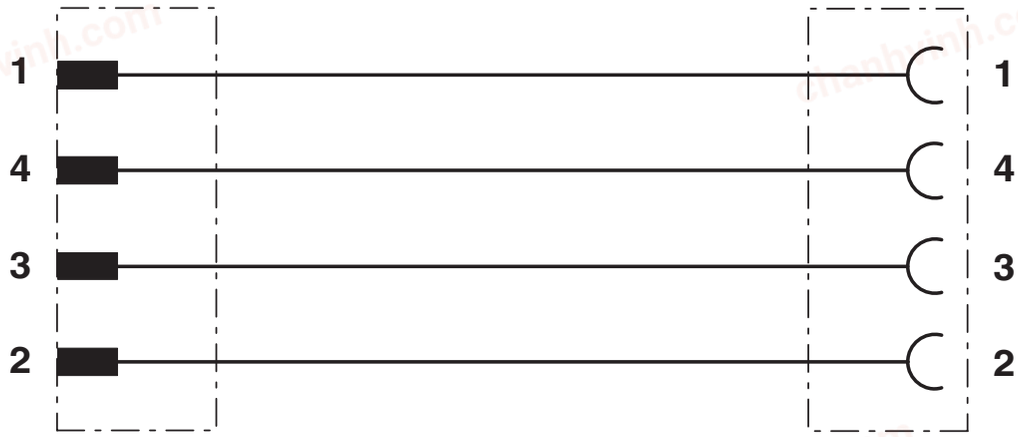

chanhvinh.com

# SAC-4P-M 8MR/ 0,3-950/M 8FR - Bus system cable

1550960

https://www.phoenixcontact.com/gb/products/1550960

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/gb/products/1550960

**EAC-RoHS**
Approval ID: RU D-DE.HB35.B.00387

**cULus Listed**
Approval ID: E221474

chanhvinh.com

# SAC-4P-M 8MR/ 0,3-950/M 8FR - Bus system cable

1550960

https://www.phoenixcontact.com/gb/products/1550960

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-11.0 | 27060307 |
| ECLASS-12.0 | 27060307 |
| ECLASS-13.0 | 27060307 |

### ETIM

| | |
|---|---|
| ETIM 9.0 | EC001855 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 26121600 |

chanhvinh.com

# SAC-4P-M 8MR/ 0,3-950/M 8FR - Bus system cable

1550960

https://www.phoenixcontact.com/gb/products/1550960

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2024 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk