chanhvinh.com

AXL F DI32/1 XC 1F - Digital module

2701226

https://www.phoenixcontact.com/pc/products/2701226

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Axioline F, Digital input module, Digital inputs: 32, 24 V DC, connection technology: 1-conductor, Extreme conditions version, transmission speed in the local bus: 100 Mbps, degree of protection: IP20, including bus base module and Axioline F connectors

Product description

The module is designed for use within an Axioline F station. It is used to acquire digital signals. You can adjust the filter times of the inputs to increase noise immunity. Filter times of 100 µs enable you to implement a counter function with a maximum input frequency of 5 kHz in the application.

Your advantages

- 32 digital inputs in accordance with EN 61131-2 type 1 and type 3
- 24 V DC, 2.4 mA
- Connection of sensors in 1-conductor technology
- Minimum update time of < 100 µs
- Filter times can be adjusted in three increments: < 100 µs, 1000 µs or 3000 µs
- Maximum input frequency: 5 kHz
- Device rating plate stored
- Can be used under extreme ambient conditions
- Extended temperature range of -40 °C ... +70 °C (see “Tested successfully: use under extreme ambient conditions” in the data sheet)
- Partially coated PCBs

Commercial data

Item number	2701226
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	DRI231
Catalog page	Page 75 (C-6-2019)
GTIN	4046356730785
Weight per piece (including packing)	236.9 g
Weight per piece (excluding packing)	167 g
Customs tariff number	85389091
Country of origin	DE

chanhvinh.com


AXL F DI32/1 XC 1F - Digital module

2701226

https://www.phoenixcontact.com/pc/products/2701226

Technical data

Dimensions

Dimensional drawing	
Width	53.6 mm
Height	126.1 mm
Depth	54 mm
Note on dimensions	The depth applies when a TH 35-7.5 DIN rail is used (in accordance with EN 60715).

Notes

Note on application

Note on application	Only for industrial use

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area

Interfaces

Axioline F local bus

Number of interfaces	2
Connection method	Bus base module
Transmission speed	100 Mbps

System properties

Module

Input address area	4 Byte
Output address area	0 Byte
Required parameter data	3 Byte
Required configuration data	6 Byte

Input data

Digital:

Input name	Digital inputs
Description of the input	EN 61131-2 types 1 and 3
Number of inputs	32
Connection method	Push-in connection

chanhvinh.com

AXL F DI32/1 XC 1F - Digital module

2701226

https://www.phoenixcontact.com/pc/products/2701226

Connection technology	1-conductor
Input voltage range "0" signal	-3 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Nominal input voltage U_{IN}	24 V DC
Nominal input current at U_{IN}	2.4 mA
Input filter time	3000 µs (Default)
	1000 µs
	< 100 µs
Protective circuit	Polarity reversal protection of the inputs; parallel diode (30 V, 5 s)

Product properties

Product type	I/O component
Product family	Axioline F
Type	block modular
Mounting position	any (no temperature derating)
Scope of delivery	including bus base module and Axioline F connectors
Special properties	Extreme conditions version

Insulation characteristics

Overvoltage category	II (IEC 60664-1, EN 60664-1)
Pollution degree	2 (IEC 60664-1, EN 60664-1)

Electrical properties

Maximum power dissipation for nominal condition	3.65 W

Potentials: Axioline F local bus supply (U_{Bus})

Supply voltage	5 V DC (via bus base module)
Current draw	max. 120 mA (HW 00)
	max. 60 mA (from HW 01)

Potentials: Supply for digital input modules (U_I)

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 50 mA
Protective circuit	Surge protection; electronic (35 V, 0.5 s)
	Reverse polarity protection; parallel diode; with external 5 A fuse (only for commissioning)

Electrical isolation/isolation of the voltage ranges

Test voltage: 5 V supply of the local bus (U_{Bus}) / 24 V supply (I/Os)	500 V AC, 50 Hz, 1 min
Test voltage: 5 V supply of the local bus (U_{Bus}) / functional ground	500 V AC, 50 Hz, 1 min
Test voltage: 24 V supply (I/O) / functional ground	500 V AC, 50 Hz, 1 min

Connection data

Connection technology

chanhvinh.com

Connection name	Axioline F connector
Note on the connection method	Please observe the information provided on conductor cross sections in the “Axioline F: system and installation” user manual.
	Applications with UL approval: only use copper conductors.

Conductor connection

Connection method	Push-in connection
Conductor cross section rigid	0.2 mm² ... 1.5 mm²
Conductor cross section flexible	0.2 mm² ... 1.5 mm²
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

Axioline F connector

Connection method	Push-in connection
Note on the connection method	Please observe the information provided on conductor cross sections in the “Axioline F: system and installation” user manual.
	Applications with UL approval: only use copper conductors.
Conductor cross section, rigid	0.2 mm² ... 1.5 mm²
Conductor cross section, flexible	0.2 mm² ... 1.5 mm²
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C (Standard applications and applications with UL approval)
	-40 °C ... 70 °C (Extended, see section “Tested successfully: use under extreme ambient conditions” in the data sheet.)
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	5 % ... 95 % (non-condensing)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)

Mounting

Mounting type	DIN rail mounting
Mounting position	any (no temperature derating)

chanhvinh.com


AXL F DI32/1 XC 1F - Digital module

2701226

https://www.phoenixcontact.com/pc/products/2701226

Drawings

Block diagram

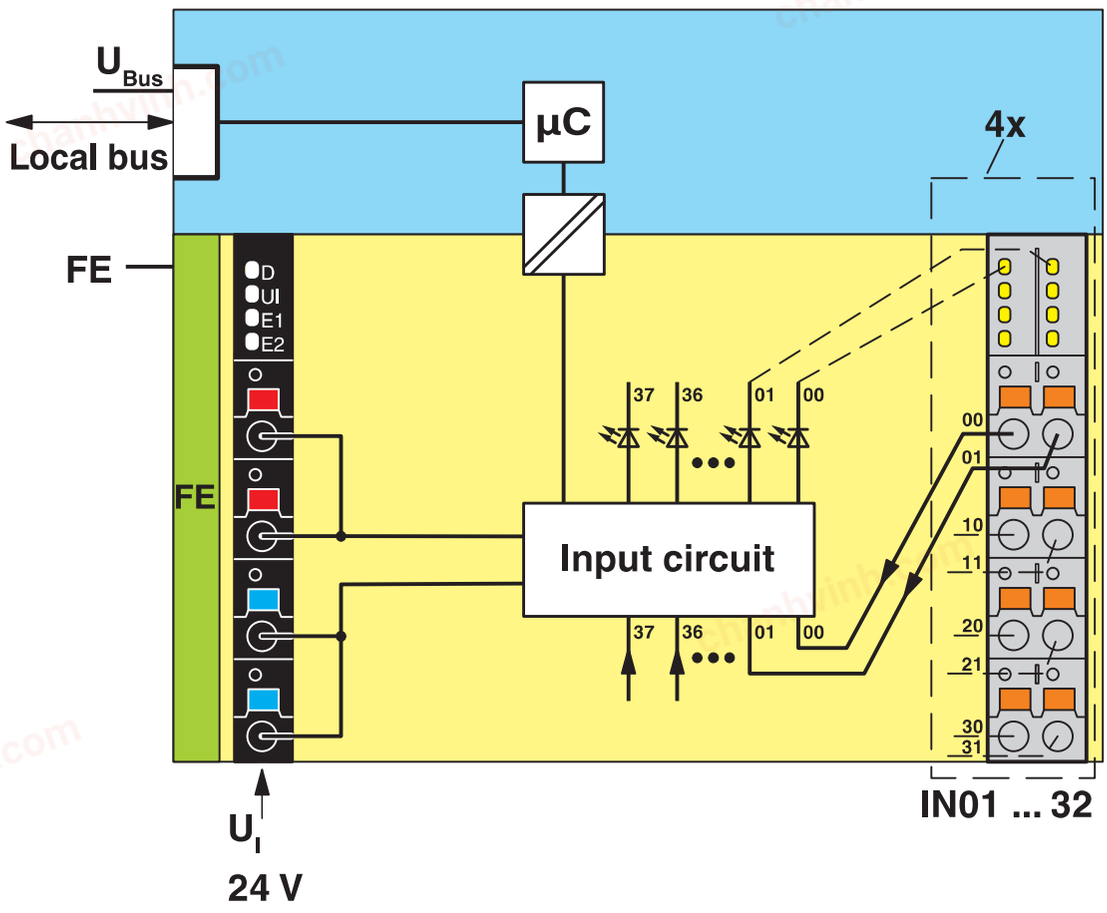

Internal wiring of the terminal points


chanhvinh.com

AXL F DI32/1 XC 1F - Digital module


2701226

https://www.phoenixcontact.com/pc/products/2701226

Dimensional drawing

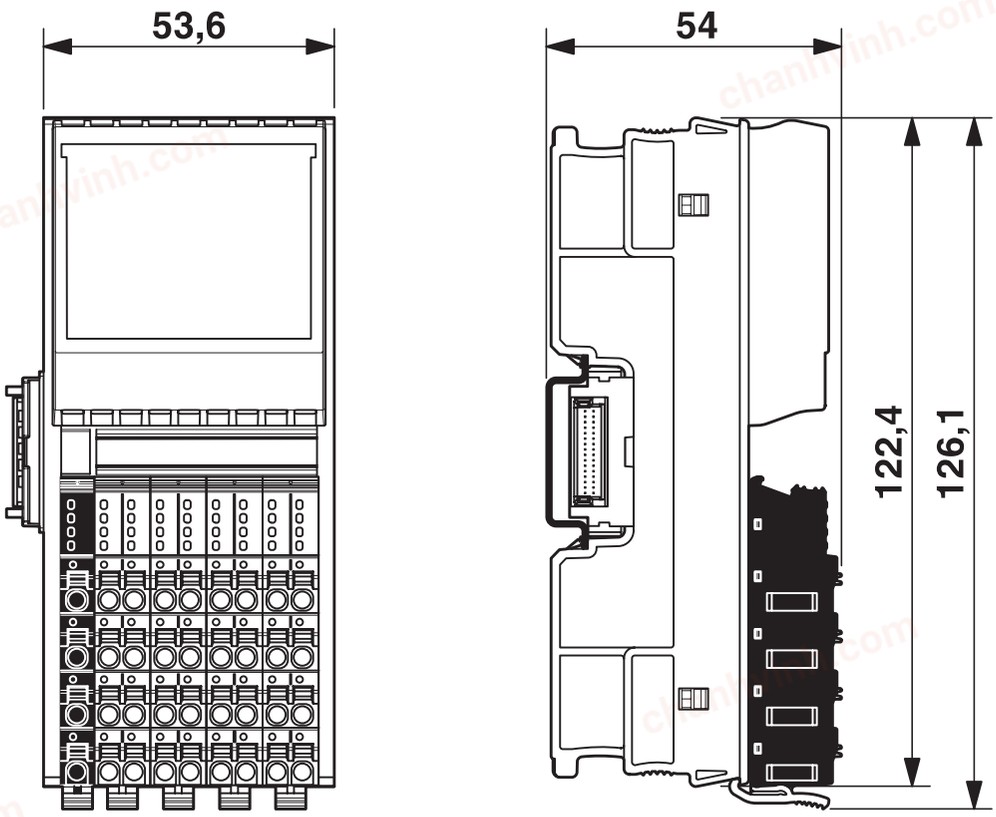

Connection diagram

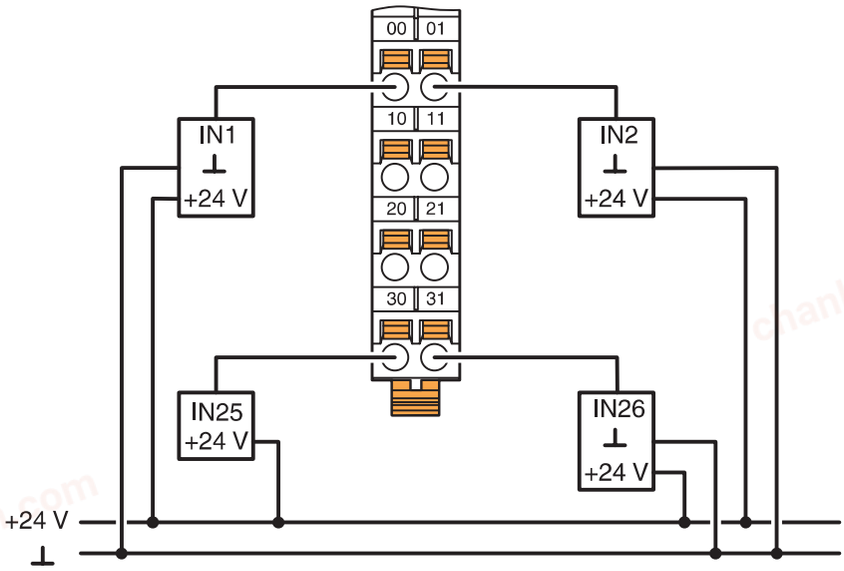

chanhvinh.com

AXL F DI32/1 XC 1F - Digital module

2701226

https://www.phoenixcontact.com/pc/products/2701226

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/2701226

DNV GL
Approval ID: TAA00000DF

LR
Approval ID: LR2480202TA

NK
Approval ID: 14A006

BV
Approval ID: 36433/B4 BV

PRS
Approval ID: TE/1020/880590/21

BSH
Approval ID: 840

RINA
Approval ID: ELE008423XG

ABS
Approval ID: 20-2059154-PDA

UAE-RoHS
Approval ID: 23-02-63242

cULus Listed
Approval ID: E238705

ABS
Approval ID: 20-2059154-PDA

chanhvinh.com

AXL F DI32/1 XC 1F - Digital module

2701226

https://www.phoenixcontact.com/pc/products/2701226

BSH
Approval ID: 840

BV
Approval ID: 36433/B4 BV

DNV GL
Approval ID: TAA00000DF

PRS
Approval ID: TE/1020/880590/21

NK
Approval ID: 14A006

RINA
Approval ID: ELE008423XG

cULus Listed
Approval ID: E238705

UAE-RoHS
Approval ID: 23-02-63242

chanhvinh.com

AXL F DI32/1 XC 1F - Digital module

2701226

https://www.phoenixcontact.com/pc/products/2701226

Classifications

ECLASS

ECLASS-11.0	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604

ETIM

ETIM 9.0	EC001599

UNSPSC

UNSPSC 21.0	32151600

chanhvinh.com

AXL F DI32/1 XC 1F - Digital module

2701226

https://www.phoenixcontact.com/pc/products/2701226

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	176effd0-e82d-4dd0-ad49-f023593c2906

Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com