chanhvinh.com

TC EXTENDER PT-IQ-2S - Surge protection plug

2702258

https://www.phoenixcontact.com/in/products/2702258

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Replaceable surge protection module, only for Ethernet extender TC EXTENDER 6004 ETH-2S (2702255), 2 SHDSL ports, two-wire protection for floating SHDSL cables, two-level protective circuit

Commercial data

Item number	2702258
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNC
Product key	DNC442
Catalog page	Page 349 (C-6-2019)
GTIN	4055626057705
Weight per piece (including packing)	86 g
Weight per piece (excluding packing)	48.68 g
Customs tariff number	85363090
Country of origin	DE

chanhvinh.com

TC EXTENDER PT-IQ-2S - Surge protection plug

2702258

https://www.phoenixcontact.com/in/products/2702258

Technical data

Notes

Note on application

Note on application	Only for industrial use

Product properties

Product type	Replacement plug
IEC test classification	B1
	C1
	C2
	C3
	D1
Type	Male
Wire pairs per module	2

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

Nominal voltage U_N	24 V DC

Connection data

Connection method	pluggable

Dimensions

Width	22 mm
Height	96 mm
Depth	80 mm

Protective circuit

Direction of action	Line-Line & Line-Earth Ground
Nominal discharge current I_n (8/20) µs (line-line)	1 kA (C1, 300 pulses)
Nominal discharge current I_n (8/20) µs (line-ground)	1 kA
Pulse discharge current I_{imp} (10/350) µs (line-earth)	500 A (D1)
Total discharge current I_{total} (8/20) µs	9 kA
Nominal pulse current Ian (10/1000) µs (line-line)	100 A (B1)
Nominal pulse current Ian (10/1000) µs (line-earth)	100 A

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20

chanhvinh.com

TC EXTENDER PT-IQ-2S - Surge protection plug

2702258

https://www.phoenixcontact.com/in/products/2702258

Approvals

Conformity/Approvals

Noxious gas test	ISA-S71.04-1985 G3 Harsh Group A

Standards and regulations

Standards/specifications	IEC 61643-21
Standards/specifications	IEC 60664-1

Mounting

Mounting type	Pluggable (slot)

chanhvinh.com


TC EXTENDER PT-IQ-2S - Surge protection plug

2702258

https://www.phoenixcontact.com/in/products/2702258


Drawings

Schematic diagram

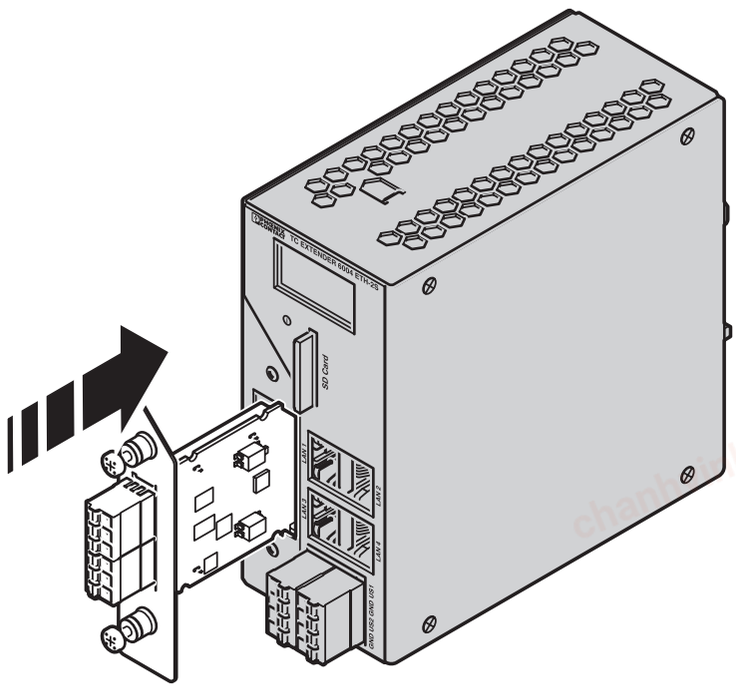

Replacement of protection module

Schematic diagram

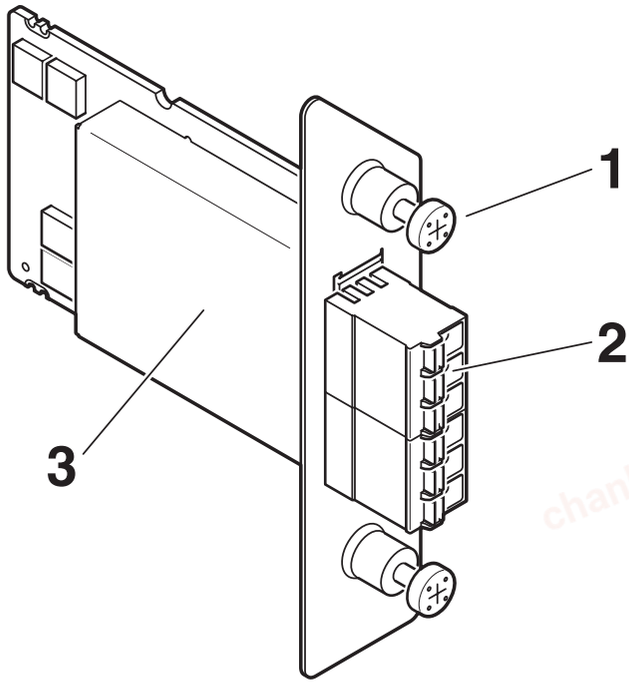

Function elements

chanhvinh.com

TC EXTENDER PT-IQ-2S - Surge protection plug

2702258

https://www.phoenixcontact.com/in/products/2702258

Classifications

ECLASS

ECLASS-11.0	27130807
ECLASS-13.0	27171592

ETIM

ETIM 9.0	EC002497

UNSPSC

UNSPSC 21.0	39121600

chanhvinh.com

TC EXTENDER PT-IQ-2S - Surge protection plug

2702258

https://www.phoenixcontact.com/in/products/2702258

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol(CAS: 79-94-7)

chanhvinh.com

TC EXTENDER PT-IQ-2S - Surge protection plug

2702258

https://www.phoenixcontact.com/in/products/2702258

Mandatory accessories

TC EXTENDER 6004 ETH-2S - Ethernet extenders

2702255

https://www.phoenixcontact.com/in/products/2702255



Managed Ethernet extender, point-to-point, line and ring structures, data rates up to 30 Mbps, distances of up to 20 km on in-house copper cables, replaceable surge protection, 2 SHDSL ports, 4-port switch, diagnostics via display and Ethernet

Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in