chanhvinh.com

VAL-MS-T1/T2 1000DC-PV-ST - Type 1/2 surge protection plug

2801162

https://www.phoenixcontact.com/gb/products/2801162

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Replacement plug for PV arrester combinations from the VAL-MS-T1/T2 1000DC-PV-... product range

Commercial data

Item number	2801162
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CL1152
Product key	CL1152
Catalog page	Page 50 (C-4-2019)
GTIN	4046356714310
Weight per piece (including packing)	99 g
Weight per piece (excluding packing)	71.55 g
Customs tariff number	85363030
Country of origin	TR

chanhvinh.com

VAL-MS-T1/T2 1000DC-PV-ST - Type 1/2 surge protection plug

2801162

https://www.phoenixcontact.com/gb/products/2801162

Technical data

Product properties

Product type	Replacement plug
Product family	VALVETRAB MS
IEC test classification	PV I / II
	PV T1 / T2
EN type	T1 / T2
IEC power supply system	DC
Type	Male
Number of positions	1
Installation location	Interior
Installation location of the disconnect device	Internal
Accessibility	Accessible
SPD failure behavior	OCFM (Open-Circuit Failure Mode)
Surge protection fault message	optical


Insulation characteristics

Overvoltage category	III
Pollution degree	2

Connection data

Connection method	pluggable

Dimensions

Dimensional drawing	
Width	17.5 mm
Height	52.4 mm
Depth	55.3 mm
Horizontal pitch	1 Div.

Material specifications

Color	black (RAL 9005)
	black (RAL 9005)
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6-FR

chanhvinh.com

VAL-MS-T1/T2 1000DC-PV-ST - Type 1/2 surge protection plug

2801162

https://www.phoenixcontact.com/gb/products/2801162

Material group	I
Housing material	PA 6.6-FR

Protective circuit

Direction of action	(L+)-PE & (L-)-PE & (L+)-(L-)
Standby power consumption P_C	≤ 25.00 mVA
Nominal discharge current I_n (8/20) µs	15 kA
Maximum discharge current I_{max} (8/20) µs	40 kA
Impulse discharge current (10/350) µs, charge	2.5 As
Impulse discharge current (10/350) µs, specific energy	6.25 kJ/Ω
Impulse discharge current (10/350) µs, peak value I_{imp}	5 kA
Voltage protection level U_p	≤ 1.8 kV
Residual voltage U_{res}	≤ 1.8 kV (at I_n)
	≤ 1.5 kV (at 5 kA)
	≤ 1.7 kV (at 10 kA)
	≤ 1.9 kV (at 20 kA)
	≤ 2.2 kV (at 30 kA)
	≤ 2.4 kV (at 40 kA)
Response time t_A	≤ 25 ns

Protective circuit DC voltage side (DC)

Open circuit voltage U_{OCSTC}	≤ 487.5 V DC
Maximum discharge current I_{max} (8/20) µs	40 kA
Response time t_A	≤ 25 ns
Impulse discharge current (10/350) µs, charge	2.5 As
Impulse discharge current (10/350) µs, specific energy	6.25 kJ/Ω
Impulse discharge current (10/350) µs, peak value I_{imp}	5 kA
Insulation resistance R_{iso}	> 5 GΩ (at 500 V DC)
Nominal discharge current I_n (8/20) µs	15 kA
Continuous operating current I_{CPV}	< 20 µA
Maximum continuous operating voltage U_{CPV}	585 V DC
Short-circuit current rating I_{SCPV}	2000 A
Residual voltage U_{res}	≤ 1.8 kV (at I_n)
	≤ 1.5 kV (at 5 kA)
	≤ 1.7 kV (at 10 kA)
	≤ 1.9 kV (at 20 kA)
	≤ 2.2 kV (at 30 kA)
	≤ 2.4 kV (at 40 kA)
Voltage protection level U_p	≤ 1.8 kV
Standby power consumption P_C	≤ 25.00 mVA

Environmental and real-life conditions

Ambient conditions

chanhvinh.com

VAL-MS-T1/T2 1000DC-PV-ST - Type 1/2 surge protection plug

2801162

https://www.phoenixcontact.com/gb/products/2801162

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	60g (Half-sine / 11 ms / 3x ±X, ±Y, ±Z)
Vibration (operation)	7.5g (5-500 Hz/2.5 h/XYZ)

Approvals

UL specifications

Maximum continuous operating voltage MCOV	1170 V DC
Short-circuit current rating (SCCR)	50 kA
Voltage protection rating VPR	3 kV
Nominal discharge current I_n	10 kA
Mode of protection	(L+) - (L-)
	(L+) - G
	(L-) - G
Nominal voltage	1170 V DC
Power distribution system	DC PV
SPD Type	1CA

Standards and regulations

Standards/specifications	EN 61643-31
Note	2019
Standards/specifications	IEC 61643-31
Note	2018

Mounting

Mounting type	on base element

chanhvinh.com

VAL-MS-T1/T2 1000DC-PV-ST - Type 1/2 surge protection plug

2801162


https://www.phoenixcontact.com/gb/products/2801162

Drawings

Circuit diagram



Dimensional drawing

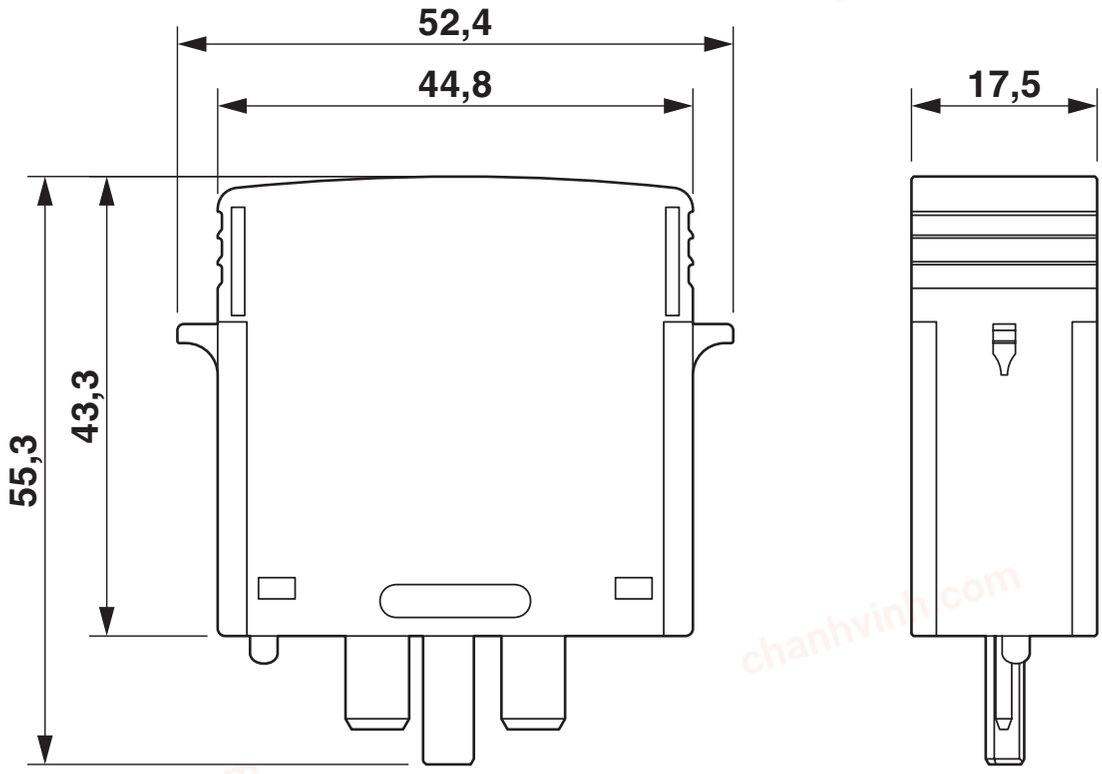

chanhvinh.com

VAL-MS-T1/T2 1000DC-PV-ST - Type 1/2 surge protection plug

2801162

https://www.phoenixcontact.com/gb/products/2801162

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/gb/products/2801162

cUL Recognized
Approval ID: FILE E 330181

UL Recognized
Approval ID: FILE E 330181

EAC
Approval ID: RU C-DE.*09.B.00169

KEMA-KEUR
Approval ID: 71-123544 REV.2

IECEE CB Scheme
Approval ID: NL-81006/A1

CCA
Approval ID: NTR-NL 7937

UAE-RoHS
Approval ID: 23-10-88705

cULus Recognized

chanhvinh.com

VAL-MS-T1/T2 1000DC-PV-ST - Type 1/2 surge protection plug

2801162

https://www.phoenixcontact.com/gb/products/2801162

Classifications

ECLASS

ECLASS-11.0	27130890
ECLASS-13.0	27171492

ETIM

ETIM 9.0	EC002496

UNSPSC

UNSPSC 21.0	39121620

chanhvinh.com

VAL-MS-T1/T2 1000DC-PV-ST - Type 1/2 surge protection plug

2801162

https://www.phoenixcontact.com/gb/products/2801162

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

chanhvinh.com

VAL-MS-T1/T2 1000DC-PV-ST - Type 1/2 surge protection plug

2801162

https://www.phoenixcontact.com/gb/products/2801162

Accessories

ZBN 18 CUS - Zack marker strip

0825059

https://www.phoenixcontact.com/gb/products/0825059



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

ZBN 18:UNBEDRUCKT - Zack marker strip

2809128

https://www.phoenixcontact.com/gb/products/2809128



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

chanhvinh.com

VAL-MS-T1/T2 1000DC-PV-ST - Type 1/2 surge protection plug

2801162

https://www.phoenixcontact.com/gb/products/2801162

DK-BIC-35 - Feed-through terminal block

2749880

https://www.phoenixcontact.com/gb/products/2749880



Feed-through terminal block for VAL and FLT applications

B-STIFT - Marker pen

1051993

https://www.phoenixcontact.com/gb/products/1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Phoenix Contact 2024 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk