chanhvinh.com

EMI Ferrite Bead

BBBK Series

Overview

EMI ferrite beads are made of ferrite material, which can block high-frequency noise while allowing required signals to pass through, providing high impedance and noise attenuation to improve signal integrity/efficiency and reduce power loss.

Benefits

1. Compliance with EMI regulations.
2. Reduced power loss and improved system efficiency
3. Operating temperature range: -55 ~ +125°C
4. Improved signal integrity

Applications

1. Wearable Devices
2. Industrial
3. Communications
4. Consumer Electronics

Product Information

Series	Size Code (JIS/EIA)	Impedance (Ω)
BBBK	1608/0603 2012/0805 3216/1206	10 ~ 2700




chanhvinh.com

BBBK00201209 Series Specification

1 Scope: This specification applies to MULTILAYER FERRITE CHIP BEADS

2 Part Numbering:

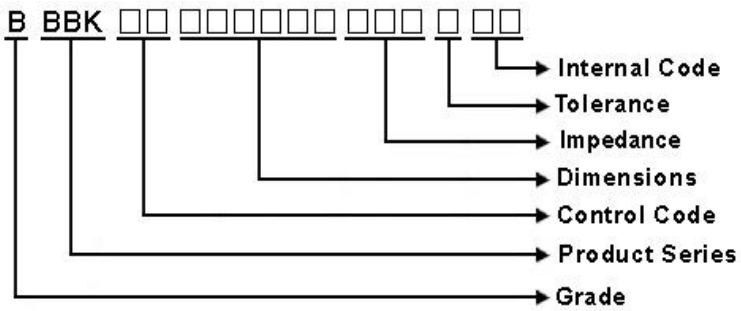

3 Rating:

Operating Temperature: - 5 5 ℃ ~ 1 2 5 ℃(Including self - temperature rise)

Storage Temperature: - 5 5 ℃ ~ 1 2 5 ℃(after PCB)
- 5 ℃~4 0 ℃,Humidity 4 0 %~7 0 %(before PCB)

4 Marking:

No Marking


5 Standard Testing Condition

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35℃)	20 to 30℃
Humidity	Ordinary Humidity(25 to 85% RH)	50 to 80 %RH

chanhvinh.com

BBBK00201209 Series Specification

6 Configuration and Dimensions:



Dimensions in mm

TYPE	201209
A	2.00±0.20
B	1.25±0.20
C	0.90±0.20
D	0.50±0.30

Net Weight (grms)

Size Code	Net Weight (grms)
201209	0.01231

7 Electrical Characteristics:

Part No.	Impedance (Ω)	Test Freq.	RDC (Ω)Max.	Rated Current (mA)Max.
BBBK00201209600Y00	60	100 MHz,200 mV	0.15	500
BBBK00201209800Y00	80	100 MHz,200 mV	0.15	500
BBBK00201209121Y00	120	100 MHz,200 mV	0.25	300
BBBK00201209221Y00	220	100 MHz,200 mV	0.3	300
BBBK00201209301Y00	300	100 MHz,200 mV	0.3	300
BBBK00201209431Y00	430	100 MHz,200 mV	0.4	300
BBBK00201209471Y00	470	100 MHz,200 mV	0.4	300
BBBK00201209601Y00	600	100 MHz,200 mV	0.4	300
BBBK00201209102Y00	1000	100 MHz,200 mV	0.5	200
BBBK00201209122Y00	1200	100 MHz,200 mV	0.6	200
BBBK00201209152Y00	1500	100 MHz,200 mV	0.6	200
BBBK00201209202Y00	2000	100 MHz,200 mV	0.7	200
BBBK00201209222Y00	2200	100 MHz,200 mV	0.7	200
BBBK00201209252Y00	2500	100 MHz,200 mV	0.7	200
BBBK00201209272Y00	2700	100 MHz,200 mV	0.7	200

NOTE: □-tolerance Y=±25% / T=±30%

1.Operating temperature range - 5 5℃ ~ 1 2 5℃(Including self - temperature rise)


2.Rate Current : Applied the current to coils, the temperature rise shall not be more than 30℃

chanhvinh.com

BBBK00201209 Series Specification

8 BBBK00201209 Series

8.1 Construction:

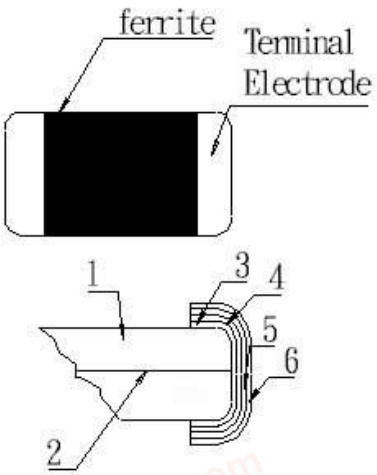

8.2 Material List:



No	Part	Material
1	Ferrite Substance	NiO-CuO-ZnO-Ferrite
2	Silver electrode	Ag
3	Silver electrode	Ag
4	Cu plating	Cu
5	Ni plating	Ni
6	Sn plating	Sn

chanhvinh.com

BBBK00201209 Series Specification

9 Reliability Of Ferrite Multilayer Chip Bead

1-1.Mechanical Performance

No	Item	Specification	Test Method
1-1-1	Flexure Strength	The forces applied on the right conditions must not damage the terminal electrode and the ferrite	Test device shall be soldered on the substrate Substrate Dimension: 100x40x1.6mm Deflection: 2.0mm Keeping Time: 30sec *For 100505, substrate dimension is 100x40x0.8mm 
1-1-2	Vibration		Test device shall be soldered on the substrate Oscillation Frequency: 10 to 55 to 10Hz for 1min Amplitude: 1.5mm Time: 2hrs for each axis (X, Y & Z), total 6hrs
1-1-3	Resistance to Soldering Heat	Appearance: No damage More than 75% of the terminal electrode should be covered with solder. Impedance : within ±30% of initial value	Pre-heating: 150℃, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 260±5℃ Immersion Time: 10±1sec
1-1-4	Solder ability	The electrodes shall be at least 95% covered with new solder coating	Pre-heating: 150℃, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 245±5℃(Pb-Free) Immersion Time: 4±1sec
1-1-5	Terminal Strength Test	No split termination 	Test device shall be soldered on the substrate, then apply a force in the direction of the arrow. Force : 5N Keeping Time: 10±1sec


1-2.Environmental Performance

No	Item	Specification	Test Method
1-2-1	Temperature Cycle	Appearance: No damage Impedance: within±30% of initial value	One cycle: Step / Temperature (℃) / Time (min) 1 / -55±3 / 30 2 / 25±2 / 3 3 / 125±3 / 30 4 / 25±2 / 3 Total: 100cycles Measured after exposure in the room condition for 24hrs
1-2-2	Humidity Resistance		Temperature: 40±2℃ Relative Humidity: 90 ~ 95% / Time: 1000hrs Measured after exposure in the room condition for 24hrs
1-2-3	High Temperature Resistance		Temperature: 125±3℃ / Relative Humidity: 0% Applied Current: Rated Current /Time: 1000hrs Measured after exposure in the room condition for 24hrs
1-2-4	Low Temperature Resistance		Temperature: -55±3℃ Relative Humidity: 0% / Time: 1000hrs Measured after exposure in the room condition for 24hrs

chanhvinh.com

YAGEO PULSE GROUP

BBBK00201209 Series Specification

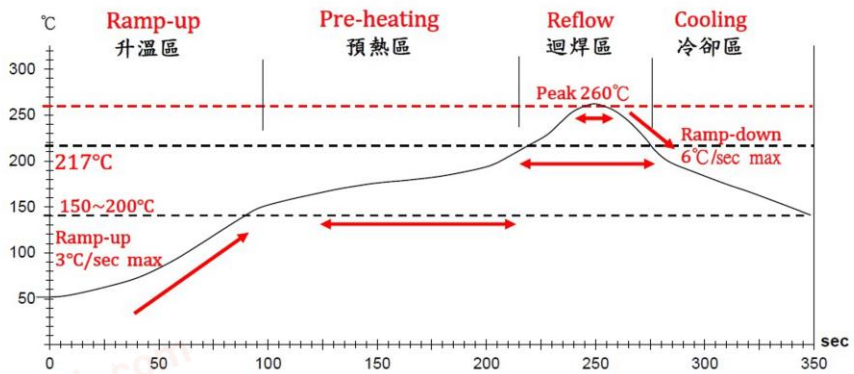

Reflow profile

Lead-Free(LF)標準溫度分析範圍 **Refer to J-STD-020C**

管制項目 Item.	升溫區 Ramp-up	預熱區 Pre-heating	迴焊區 Reflow	Peak Temp	冷卻區 Cooling
溫度範圍 Temp.scope	R.T ~ 150℃	150℃ ~ 200℃	Above 217℃	260±5℃	Peak Temp.~150℃
標準時間 Time spec.	-	60 ~ 180 sec	60 ~ 150 sec	20 ~ 40 sec	-
實際時間 Time result	-	75 ~ 100 sec	90 ~ 120 sec	20 ~ 35 sec	-

NOTE :

1. Re-flow possible times : within 2 times
2. Nitrogen adopted is recommended while in re-flow
3. Products can only be soldered with reflow


chanhvinh.com

BBBK00201209 Series Specification

11 Packaging:

11.1 Packaging -Cover Tape


The force for tearing off cover tape is 10 to 100 grams in the arrow direction.

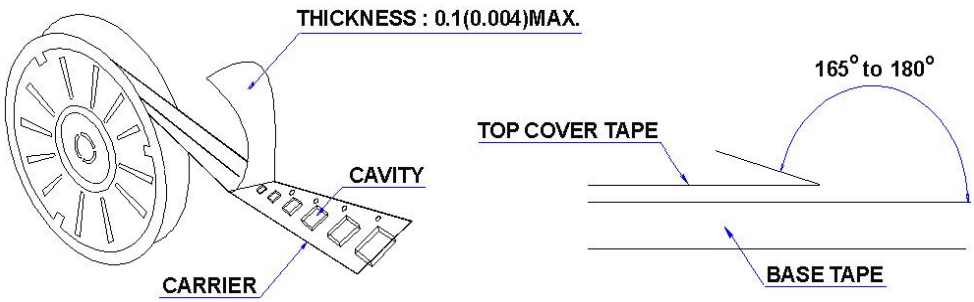

11.2 Packaging Quantity

TYPE	PCS/REEL
160808	4000
201209	4000

11.3 Reel Dimensions

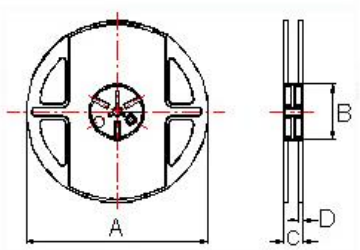

Dimensions in mm


TYPE	A	B	C	D
160808	178	60	12	1.5
201209	178	60	12	1.5

chanhvinh.com

BBBK00201209 Series Specification


11 Packaging:

11.4 Tape Dimensions in mm

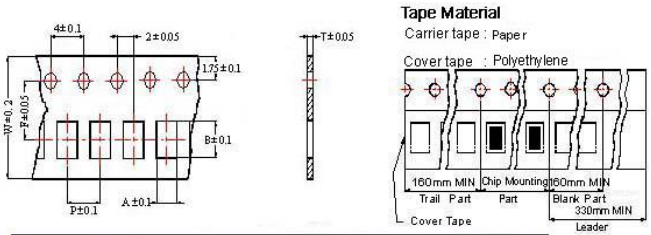

TYPE	A	B	T	W	P	F
160808	1.05	1.85	0.95	8	4	3.5
201209	1.50	2.30	0.97	8	4	3.5

12 Recommended Land Pattern:



Dimensions in mm

TYPE	A	B	C
201209	1.0 ~ 1.2	2.6 ~ 4.0	1.0 ~ 1.4

13 Note:


1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock nor drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose,under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
4. Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)
5. The moisture sensitivity level (MSL) of products is classified as level 1.

chanhvinh.com


BBBK00201209 Series Specification

14 Graph:


BBBK00201209600Y00

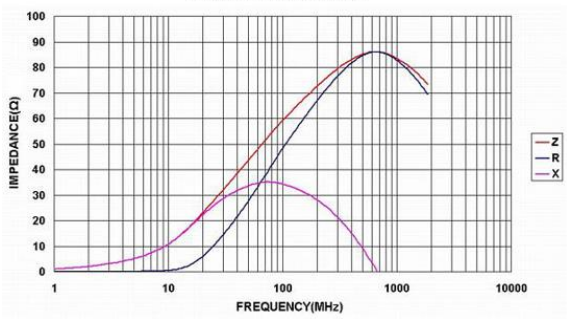


BBBK00201209800Y00

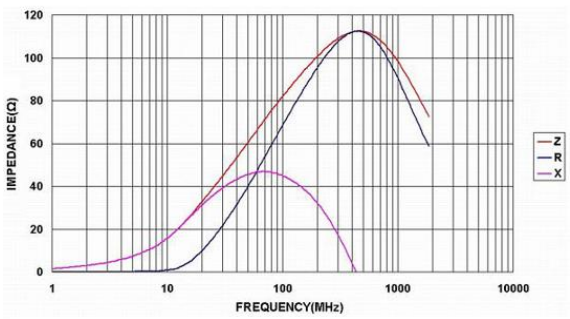


BBBK00201209121Y00

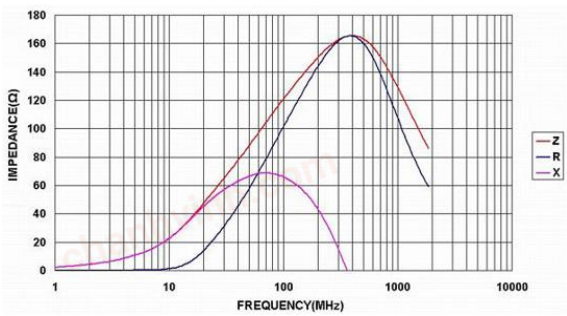


BBBK00201209221Y00

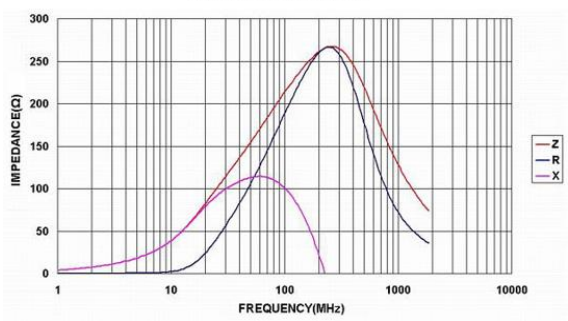


BBBK00201209301Y00

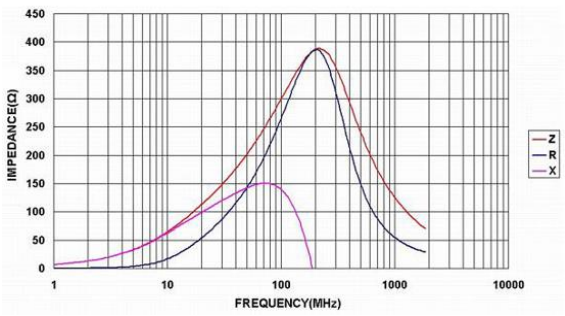


BBBK00201209431Y00

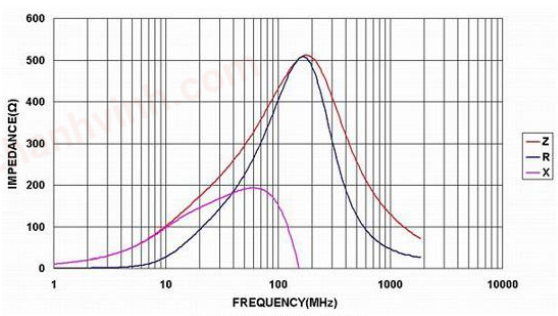

BBBK00201209471Y00

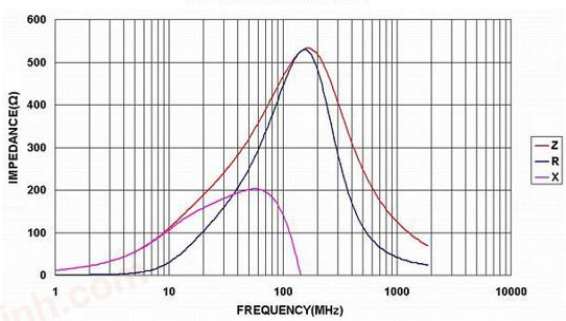

BBBK00201209601Y00

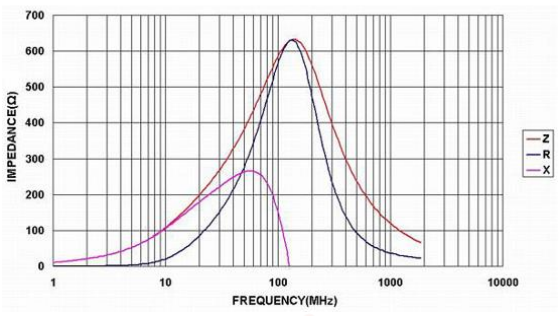


chanhvinh.com

YAGEO PULSE GROUP


BBBK00201209 Series Specification

14 Graph:


BBBK00201209102Y00

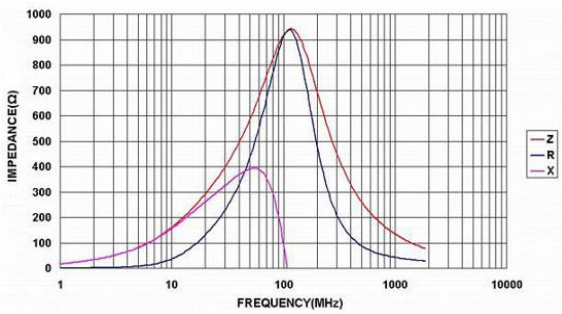


BBBK00201209122Y00

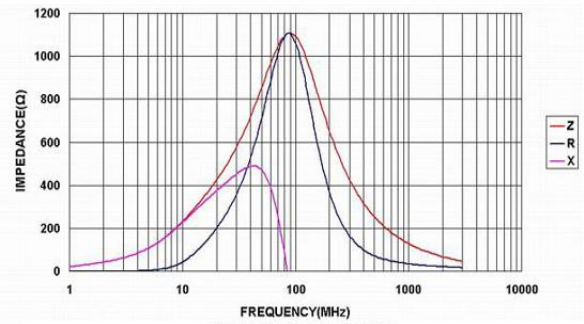


BBBK00201209152Y00

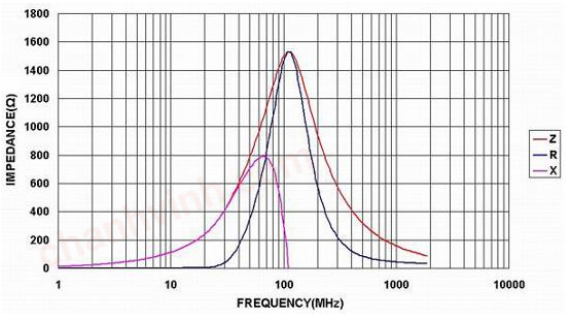


BBBK00201209202Y00

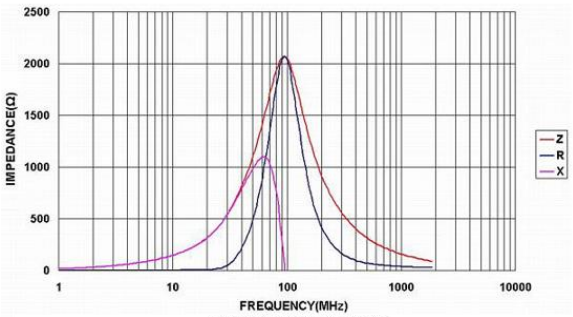

BBBK00201209222Y00

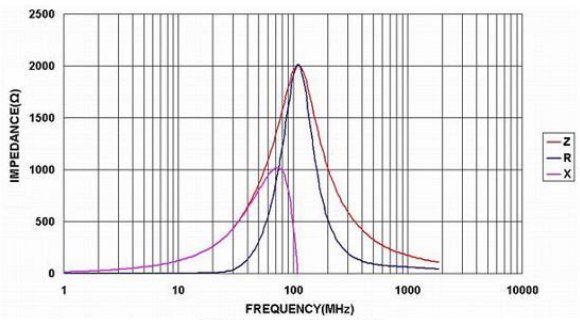

BBBK00201209252Y00

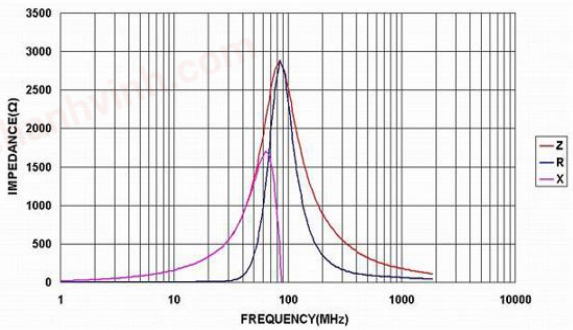

BBBK00201209272Y00

