chanhvinh.com

Pulse | LARSEN Antennas
A YAGEO Company

TECHNICAL DATA SHEET

Description: 1608 1.5G&2.4GHz Diplexer

PART NUMBER: DPX1608LL87R2455A

Features:

- Compact size : 1.6x0.8x0.6mm
- RoHS compliant

Applications:

- WLAN, 802.11a/b/g/n
- ISM Band

ELECTRICAL SPECIFICATIONS

DESCRIPTION	VALUE		
Pass Band	Low Band	High Band	
	1575-1610 MHz	2400-2500 MHz	4900-5950 MHz
Insertion Loss	0.5dB(Typ.)	0.5dB(Typ)	0.4dB(Typ.)
	0.6dB(Max)	0.7dB(Max)	0.6dB(Max)
V.S.W.R / Return-Loss	2.0 (Max) / 10.0 dB (Min)	2.0 (Max) / 10.0 dB (Min)	2.0 (Max) / 10.0 dB (Min)
Attenuation	15dB (Min).@2.4~2.5GHz	15dB (Min).@1.57~1.61GHz	
	15dB (Min).@4.9~6.0GHz		
Isolation	20 dB (Min)		
Operating Temperature	-40~+85℃		

In the effort to improve our products, we reserve the right to make changes judged to be necessary.
CONFIDENTIAL AND PROPRIETARY INFORMATION
This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.
For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel:1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Do, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg,4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998

chanhvinh.com

Pulse | LARSEN Antennas
A YAGEO Company


TECHNICAL DATA SHEET

Description: 1608 1.5G&2.4GHz Diplexer

PART NUMBER: DPX1608LL87R2455A

MECHANICAL DIMENSION

Outline

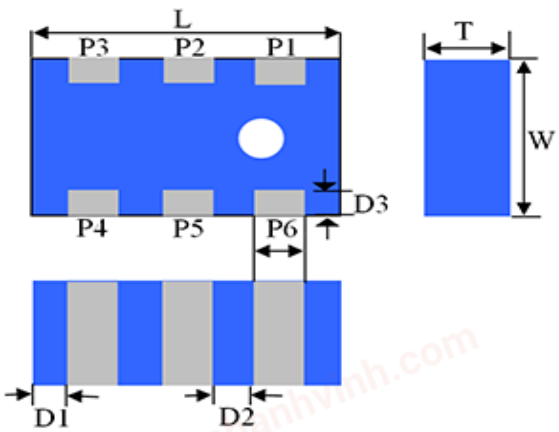


Termination

Terminal name	Function
P1	GND
P2	Common
P3	GND
P4	Low band
P5	GND
P6	High band

Mechanical

	Dimension
L (mm)	1.60±0.15
W (mm)	0.80±0.15
T (mm)	0.60±0.15
P1 (mm)	0.20±0.15
P2 (mm)	0.20±0.15
P3 (mm)	0.20±0.15
P4 (mm)	0.20±0.15
P5 (mm)	0.20±0.15
P6 (mm)	0.20±0.15
D1 (mm)	0.20±0.15
D2 (mm)	0.30±0.10
D3 (mm)	0.15±0.10

Reference design of EVB

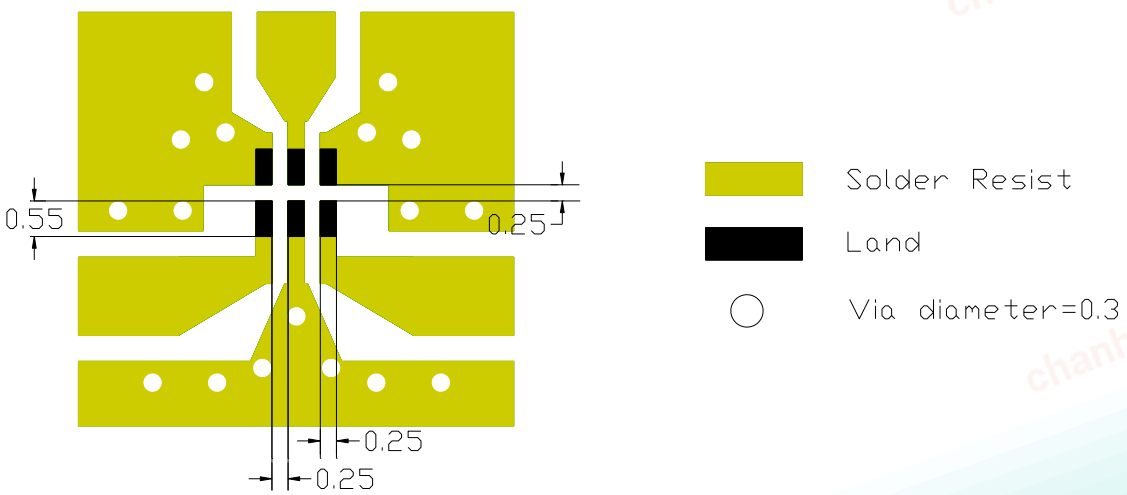

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.
CONFIDENTIAL AND PROPRIETARY INFORMATION
This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

RoHS COMPLIANT

chanhvinh.com


Pulse | LARSEN Antennas
A YAGEO Company

TECHNICAL DATA SHEET

Description: 1608 1.5G&2.4GHz Diplexer

PART NUMBER: DPX1608LL87R2455A

ELECTRICAL PERFORMANCES

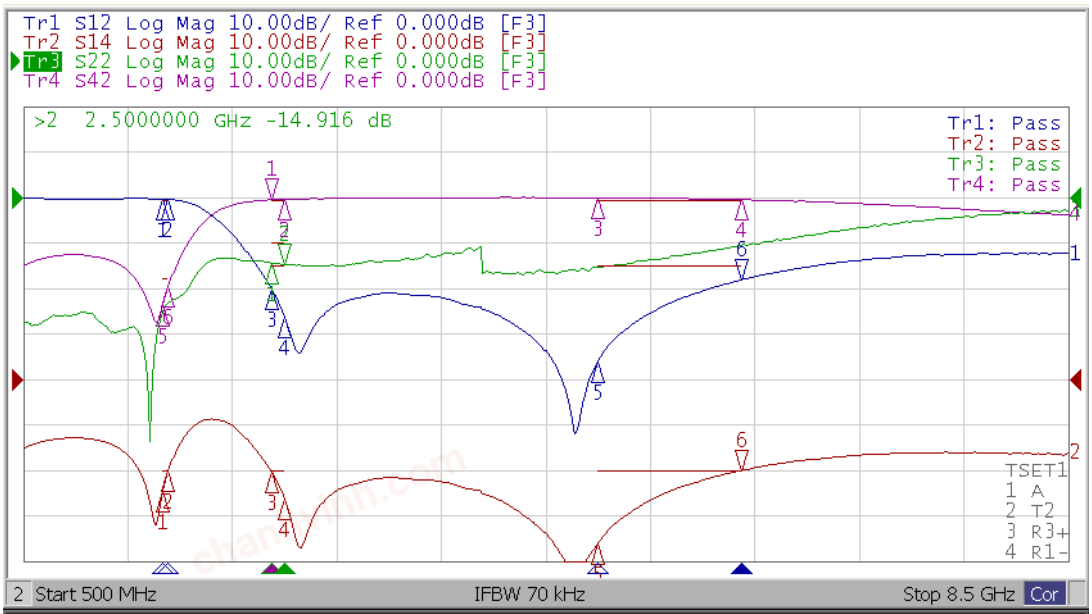

Ch2	Tr1	S12	1	1.5700000 GHz -0.3648 dB
Ch2	Tr1	S12	2	1.6100000 GHz -0.4435 dB
Ch2	Tr1	S12	3	2.4000000 GHz -20.147 dB
Ch2	Tr1	S12	4	2.5000000 GHz -26.272 dB
Ch2	Tr1	S12	5	4.9000000 GHz -36.148 dB
Ch2	Tr1	S12	6	6.0000000 GHz -18.117 dB
Ch2	Tr2	S14	1	1.5700000 GHz -24.699 dB
Ch2	Tr2	S14	2	1.6100000 GHz -21.156 dB
Ch2	Tr2	S14	3	2.4000000 GHz -21.326 dB
Ch2	Tr2	S14	4	2.5000000 GHz -26.224 dB
Ch2	Tr2	S14	5	4.9000000 GHz -36.111 dB
Ch2	Tr2	S14	6	6.0000000 GHz -21.019 dB
Ch2	Tr3	S22	1	2.4000000 GHz -14.419 dB
Ch2	Tr3	S22	>2	2.5000000 GHz -14.916 dB
Ch2	Tr4	S42	1	2.4000000 GHz -0.4934 dB
Ch2	Tr4	S42	2	2.5000000 GHz -0.4047 dB
Ch2	Tr4	S42	3	4.9000000 GHz -0.0670 dB
Ch2	Tr4	S42	4	6.0000000 GHz -0.5113 dB
Ch2	Tr4	S42	5	1.5700000 GHz -23.910 dB
Ch2	Tr4	S42	6	1.6100000 GHz -19.666 dB

- Measured on Agilent E5071C Network Analyzer
- Common port: Port 2(Return loss S22)
- Low band port: Port 1(Low band insertion loss S12, and attenuation at high band)
- High band port: Port 4(High band insertion loss S42, and attenuation at low band)

Frequency Characteristics

In the effort to improve our products, we reserve the right to make changes judged to be necessary.
CONFIDENTIAL AND PROPRIETARY INFORMATION
This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

RoHS COMPLIANT

chanhvinh.com

Pulse | LARSEN Antennas
A YAGEO Company

TECHNICAL DATA SHEET

Description: 1608 1.5G&2.4GHz Diplexer

PART NUMBER: DPX1608LL87R2455A

REVISION HISTORY

Revision	Date	Description
Version 1	Oct. 06, 2020	- New issue

chanhvinh.com

CONFIDENTIAL AND PROPRIETARY INFORMATION
This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

RoHS COMPLIANT