chanhvinh.com

SMD Antenna
2.4GHz LDS Monopole Antenna

SWA434D



Features & Applications:

- *Bluetooth devices*
- *Headsets*
- *Notebooks and netbooks*
- *Smart Phones*
- *Tablet PCs*
- *2.4GHz WiFi devices*
- *Wireless LAN (WLAN)*
- *IEEE 802.11b/g/n devices*
- *Tape&Reel packed*
- *Reflow soldering compatible*

ELECTRICAL SPECIFICATIONS @ 25°C							
General Specifications 1)							
Antenna Type	**Nominal Impedance**	**Polarization**	**Frequency**	**Return loss**	**Efficiency**	**VSWR**	**Gain**
Monopole	50Ω	Linear	2400~2483.5 MHz	< -5	> 45%	< 3	2.0 to 3.2 dBi

MECHANICAL SPECIFICATIONS						
SWA434D						
Dimension (Length x Width x Height)	**Material**	**Color**	**Antenna Type**	**Mounting Style**	**MSL**	**Weight**
3mm x 3mm x 4mm	LCP	Black	LDS	SMT	1	0.04g

ENVIRONMENTAL SPECIFICATIONS		
SWA434D		
Storage Temperature	**Operating Temperature**	**RoHS Compliant**
-40/+85° C	-40/+85° C	Yes

Notes:


1) Tested on 40x100mm evaluation board, matching circuit 4.3nH shunt inductor


chanhvinh.com

SMD Antenna
2.4GHz LDS Monopole Antenna
SWA434D


Mechanical Drawing


SWA434D

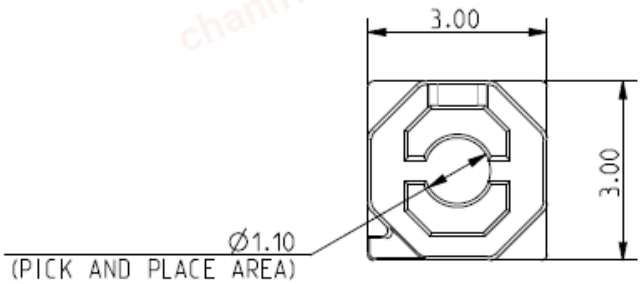

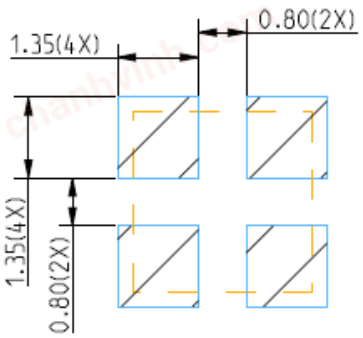

RECOMMENDED PCB LAYOUT



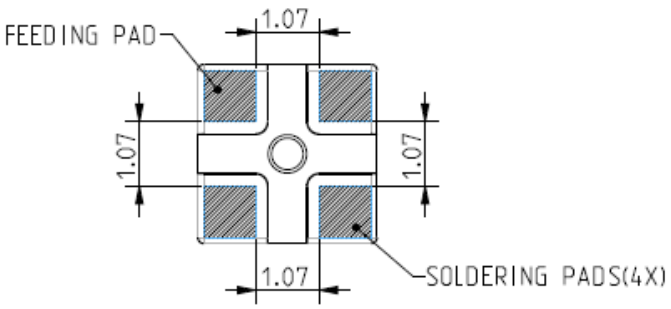



3D VIEW

Dimensions: mm

chanhvinh.com


Recommendation for Reflow Soldering Process

SWA434D

Printing stencil thickness 0.15 to 0.25 mm is recommended for solder paste. The maximum soldering temperature should not exceed 250°C.
The temperature profile recommendations for reflow solder process are presented in Figure 1 and 2. The reflow profile presented in Figure 2 describes maximum reflow temperatures.

Figure 1 - Minimum temperature profile recommendation for reflow soldering process


	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5°C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3°C/s
4	Time above 217°C	Max 30 sec
5	Peak temperature in reflow	230°C for 10 seconds
6	Temperature gradient in cooling	Max -5°C/s

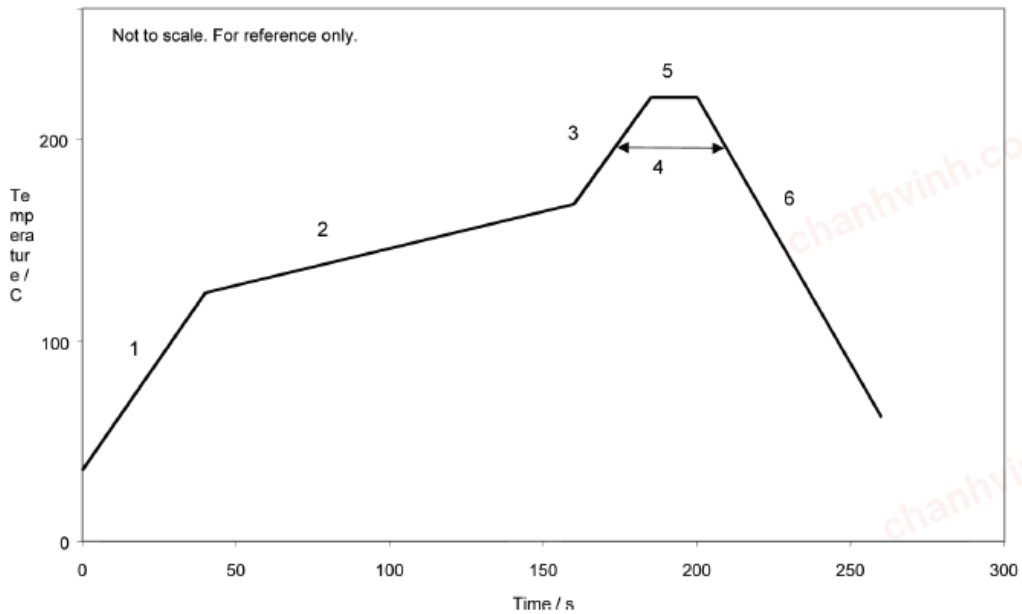

chanhvinh.com

Figure 2 - Maximum temperature profile recommendation for reflow soldering process

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	**≤2°C/s**
2	Soak time	1-2 minutes
3	Max temperature gradient in reflow	3°C/s
4	Time above 217°C	Max 60 sec
5	Time above 230°C	Max 50 sec
7	Peak temperature in reflow	250°C
8	Temperature gradient in cooling	Max-5°C/s

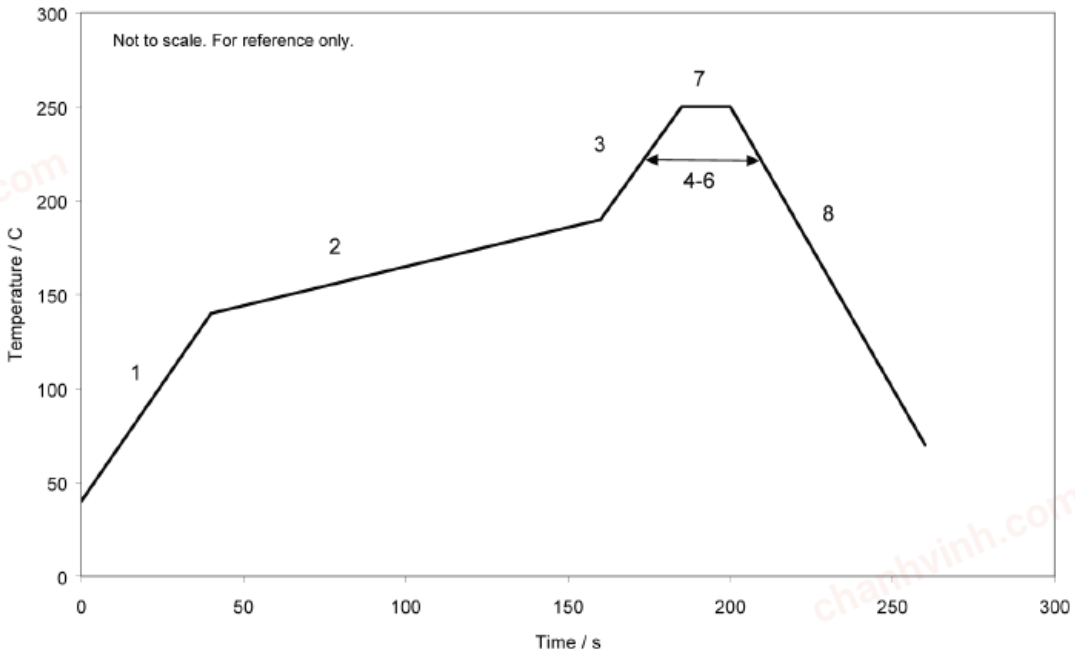



chanhvinh.com


Test Setup

SWA434D


Pulse reference test PCB for SWA434D antenna

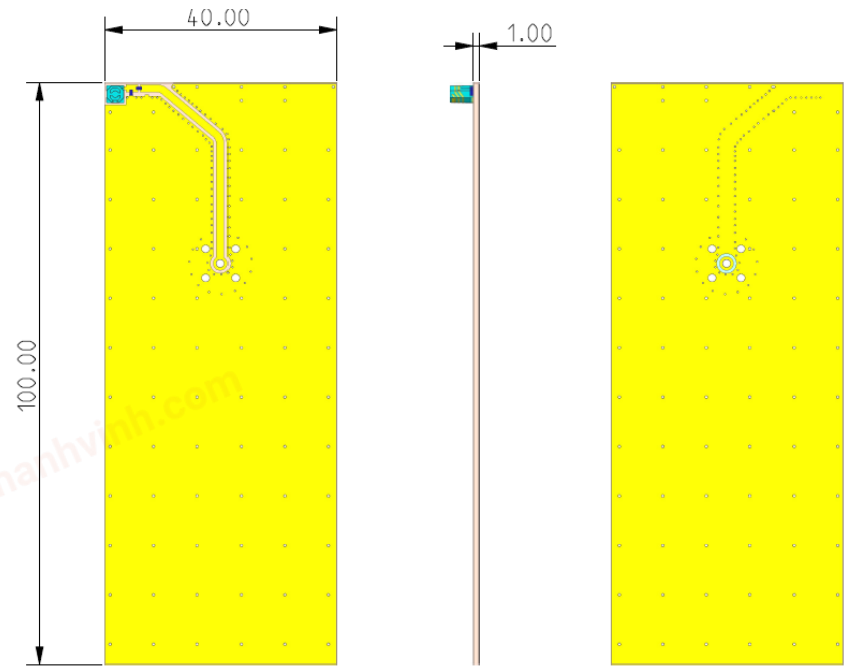

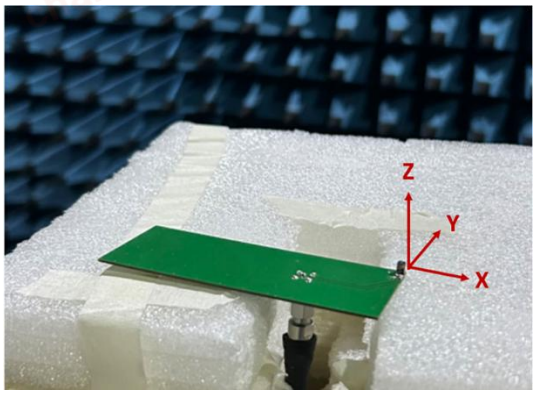

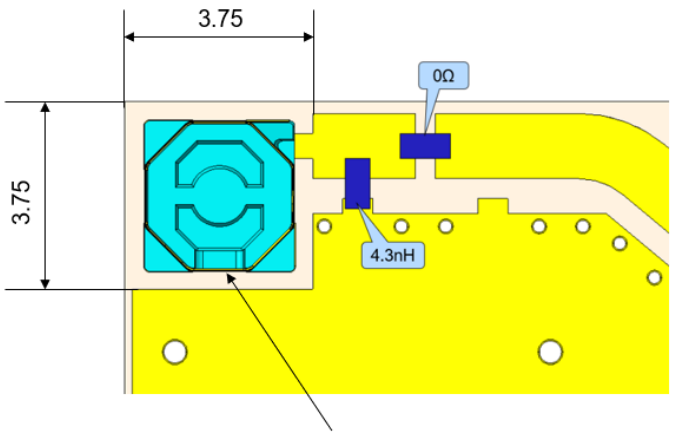

3.75mm*3.75mm keep out area on PCB top side

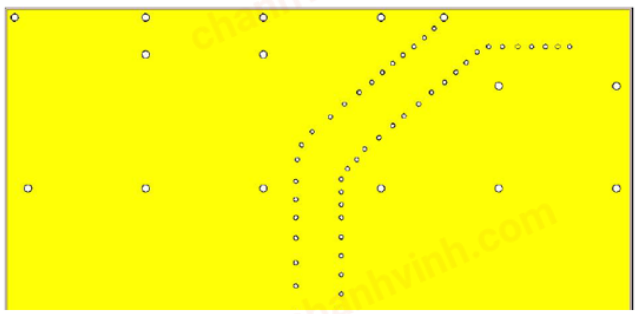


No keep out area on PCB bottom side


Dimensions: mm

chanhvinh.com

Charts- Antenna Return Loss & VSWR

SWA434D

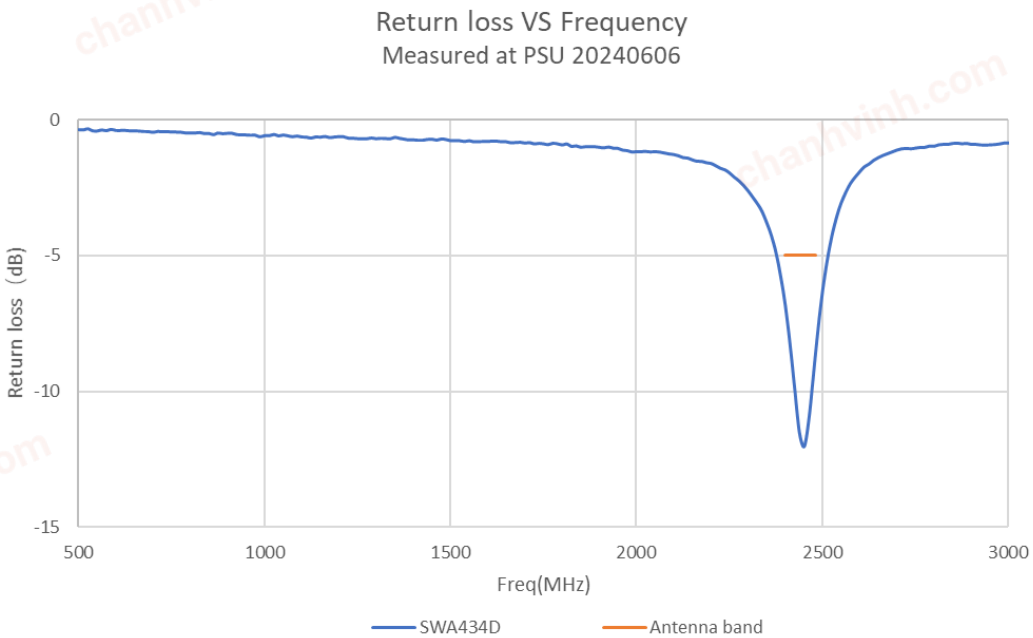


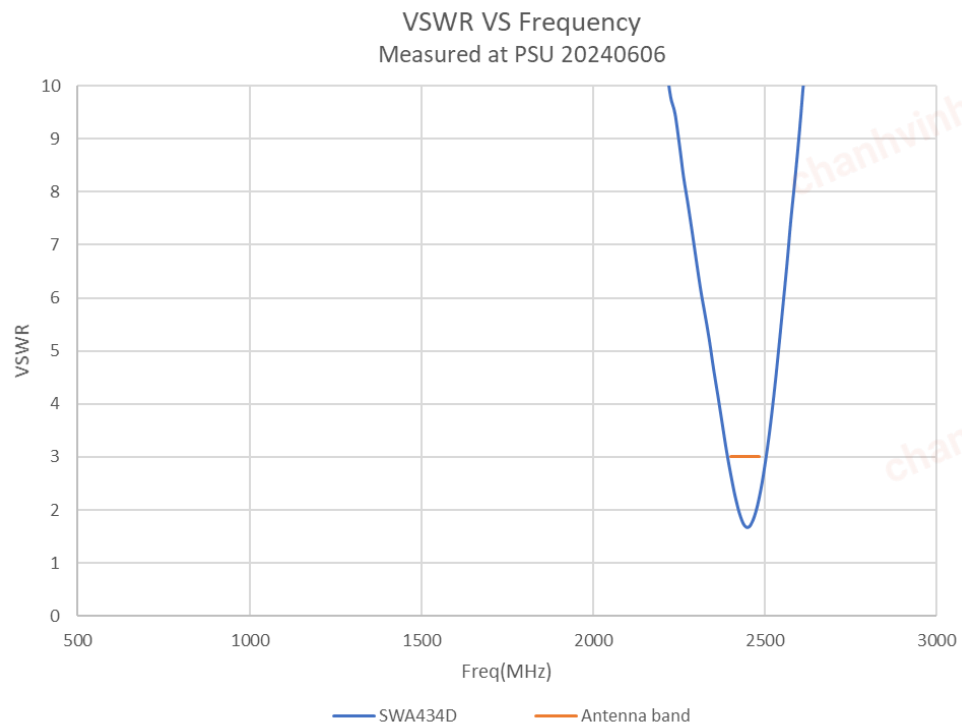


chanhvinh.com

Charts- Efficiency & Peak Gain

SWA434D

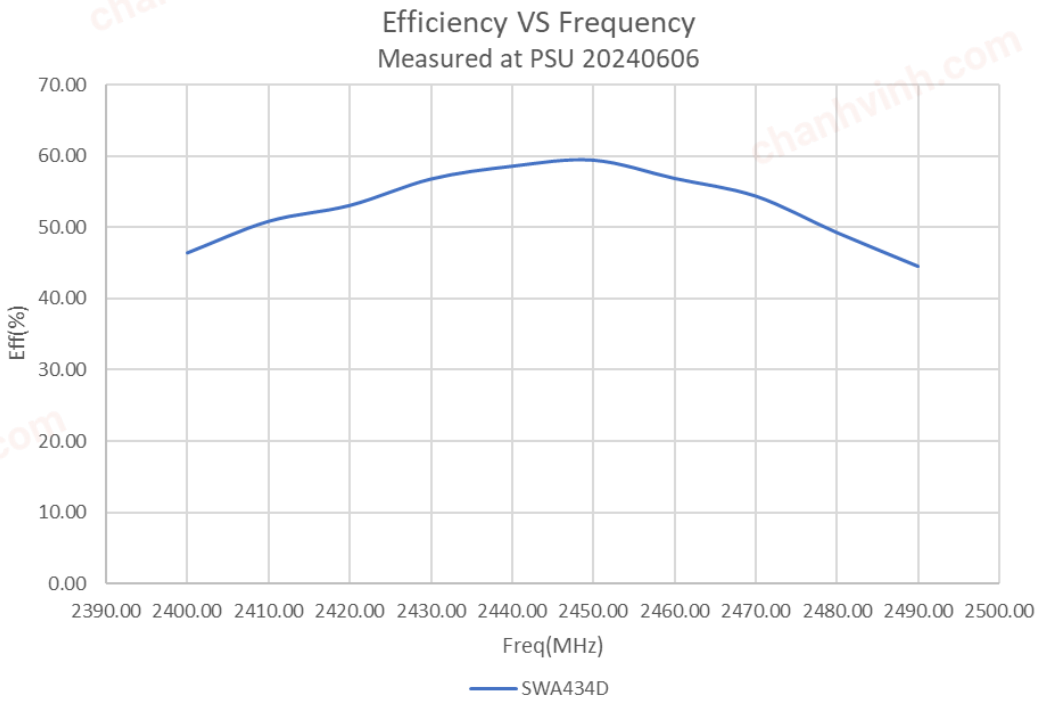


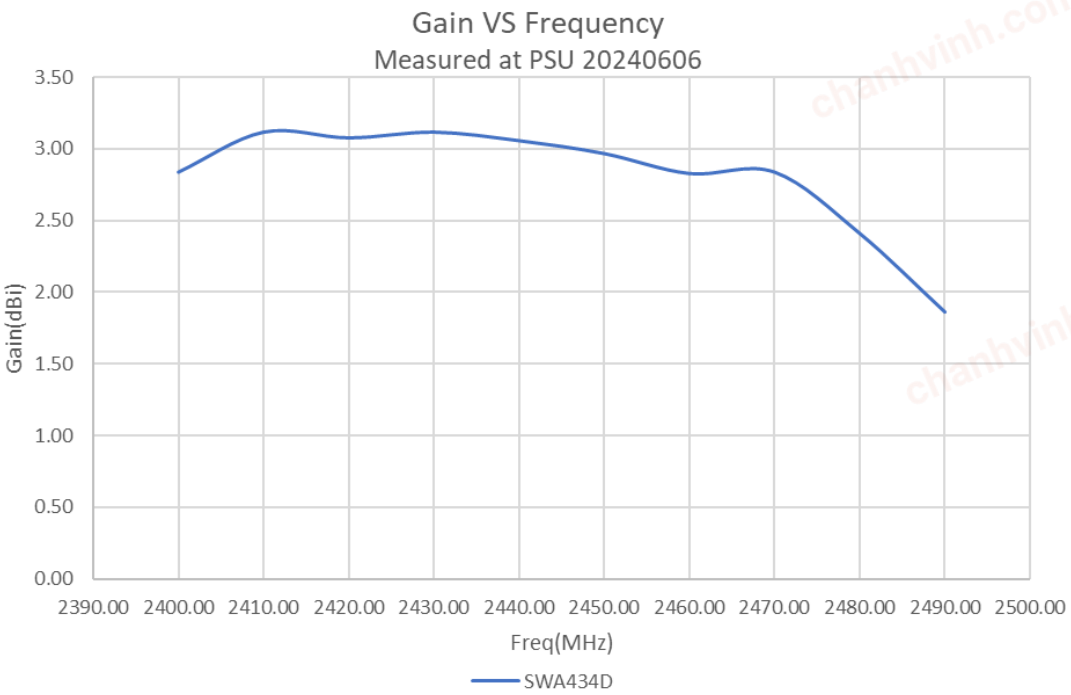



chanhvinh.com


Charts – Antenna Radiation Gain Pattern

SWA434D



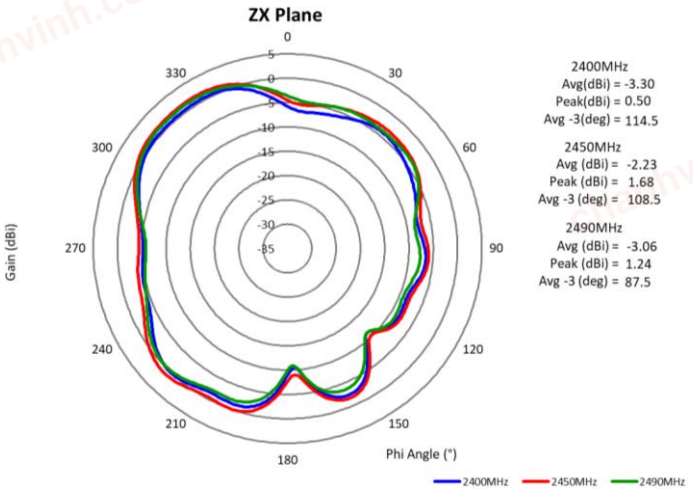

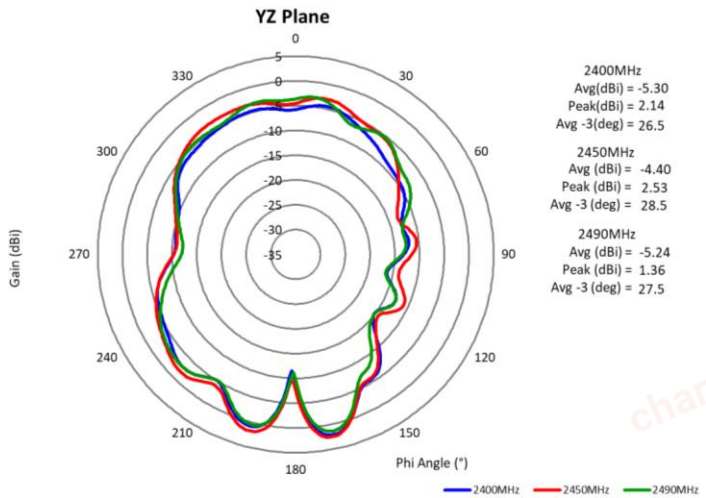


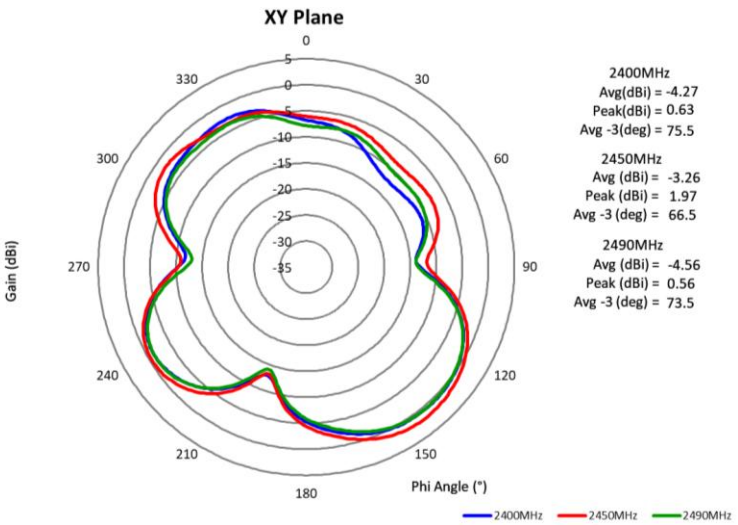



SMD Antenna
2.4GHz LDS Monopole Antenna
SWA434D


PCB Length Effect


SWA434D

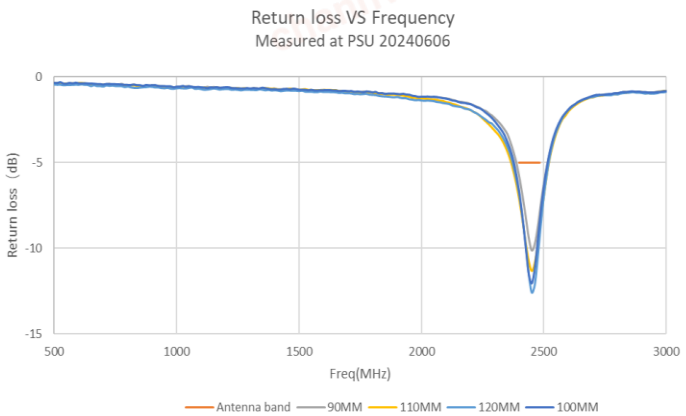

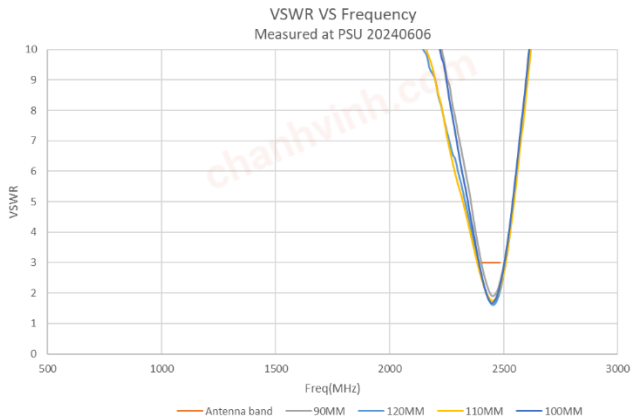

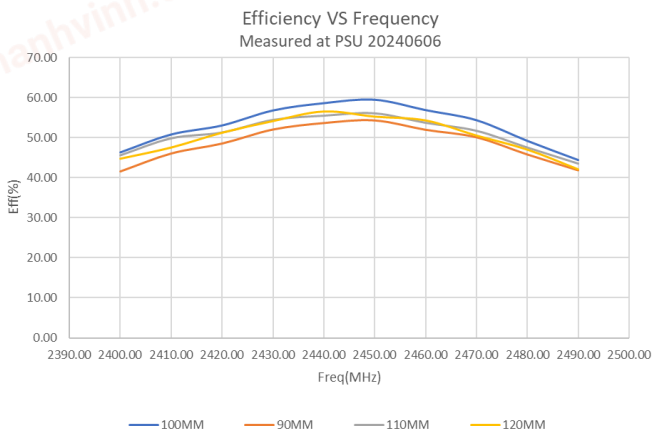

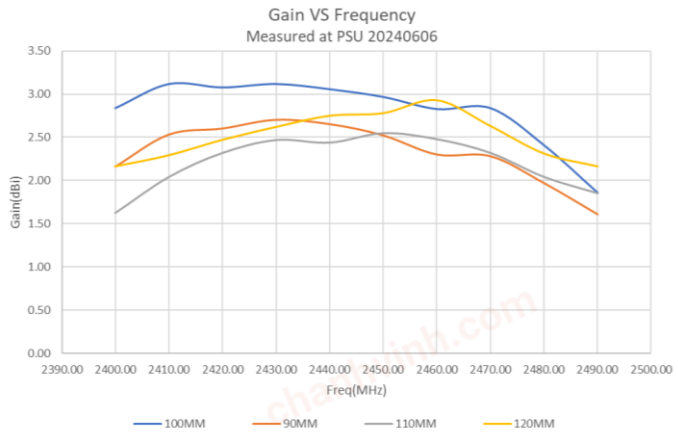

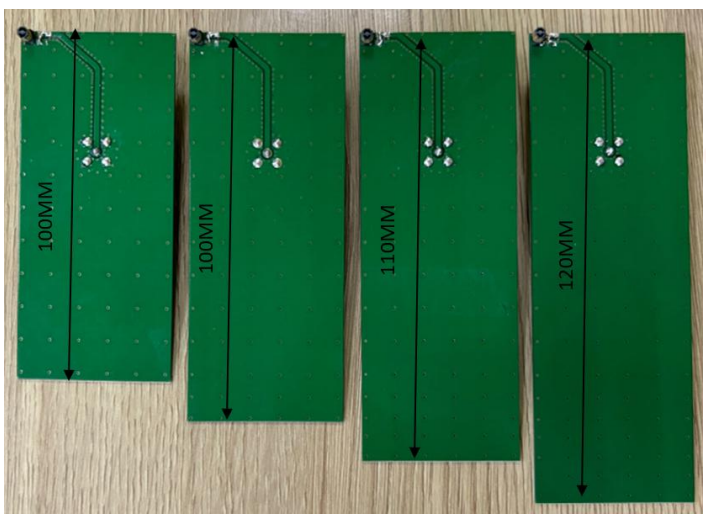



chanhvinh.com

Packaging

SWA434D

1. Reel & tape packing
2. 500pcs/reel → 6 reels/inner box → 2 inner boxes/package box
3. Total 6000pcs for one package, package box size: 390mm*215mm*165mm

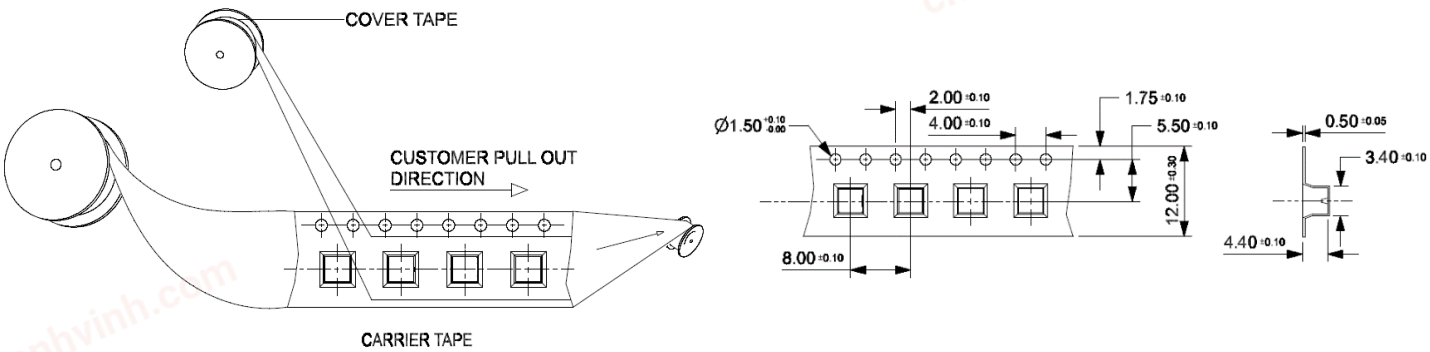

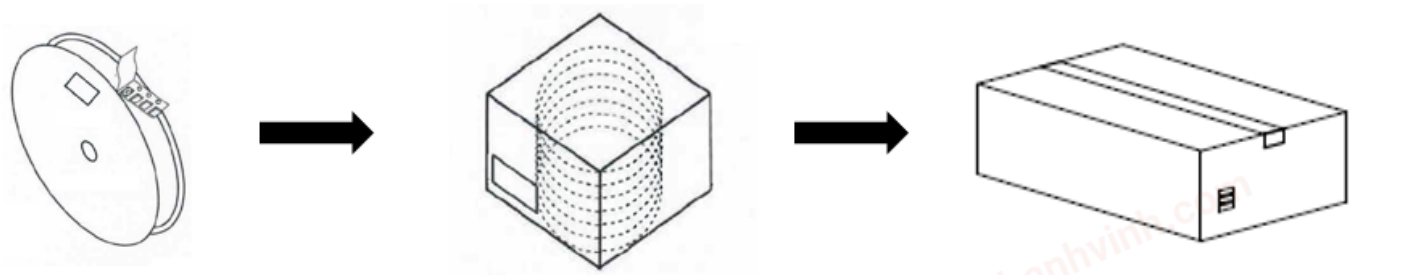

500pcs / reel
(Reel size:Ø178mm*19mm)

6 reels / inner box
(Inner box size:205mm*187mm*128mm)

2 inner boxes/ package box
(Package box size:390mm*215mm*165mm)

For More Information:
Americas - antennas.us@pulseelectronics.com | Europe – antennas.eu@pulseelectronics.com | Asia – antennas.as@pulseelectronics.com | Questions? +1-800-ANTENNA
Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright , 2020. Pulse Electronics, Inc. All rights reserved.
Company address: Pulse Electronics, a YAGEO Company, 15255 Innovation Drive, Suite #100, San Diego, CA 92128.

'YAGEO Corporation and its affiliates do not recommend the use of commercial, automotive, and/or COTS grade products for high reliability applications or manned space flight.'