chanhvinh.com

Features

Regulated Converters

- 2W power in SMD or DIP8 package
- 4:1 Input voltage range
- Efficiency up to 81%
- 1.6kVDC/1min isolation
- Regulated output
- -40°C to +85°C at full load
- Continuous short circuit protected

RECOM
DC/DC Converter

R2M

2 Watt DIP8 & SMD Single & Dual Output

3 YEAR warranty





Description

The R2M is an isolated 2W DC/DC converter in a compact SMD package or DIP8 package available with 4:1 inputs covering 5, 12, 24, and 48V rails providing single or dual regulated, short-circuit protected outputs. There is no minimum load requirement. Isolation is 1.6kVDC/1min, and the operating temperature is from -40°C up to +85°C without derating. Class A and Class B EMC conformity requires only a few external components. Standard packaging is tube.

Selection Guide

Part Number	Input Voltage Range (1) [VDC]	nom. Output Voltage [VDC]	Output Current [mA]	Efficiency typ. (2) [%]	max. Capacitive Load (3) [µF]
R2M-xx3.3S	4.5-18, 9-36, 18-75	3.3	500	77-78	2200
R2M-xx05S	4.5-18, 9-36, 18-75	5	400	78-79	1000
R2M-xx09S	4.5-18, 9-36, 18-75	9	222	79	660
R2M-xx12S	4.5-18, 9-36, 18-75	12	167	81	550
R2M-xx15S	4.5-18, 9-36, 18-75	15	134	81	440
R2M-xx24S	4.5-18, 9-36, 18-75	24	83	80	200
R2M-xx05D	4.5-18, 9-36, 18-75	±5	±200	77	±660
R2M-xx12D	4.5-18, 9-36, 18-75	±12	±83	80	±330
R2M-xx15D	4.5-18, 9-36, 18-75	±15	±67	81	±200

Notes:

Note1: Refer to **"Input Voltage Range"**

Note2: Efficiency is tested at nominal input and full load at +25°C ambient

Note3: Max Cap Load is tested at nominal input and full resistive load

Model Numbering

R2M-____/__

- nom. Input Voltage
- nom. Output Voltage
- Case Style
- **S**ingle/**D**ual

Notes:

Note4: add suffix "/SMD" for SMD version, or leave blank for DIP8 THT version.

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS					
Parameter	**Condition**		**Min.**	**Typ.**	**Max.**
Input Voltage Range	nom. V_{IN}= 12VDC		4.5VDC	12VDC	18VDC
	nom. V_{IN}= 24VDC		9VDC	24VDC	36VDC
	nom. V_{IN}= 48VDC		18VDC	48VDC	75VDC
Input Surge Voltage	1 second max.	nom. V_{IN}= 12VDC			25VDC
		nom. V_{IN}= 24VDC			50VDC
		nom. V_{IN}= 48VDC			100VDC

continued on next page

chanhvinh.com

RECOM

DC/DC Converter

R2M Series

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)


BASIC CHARACTERISTICS					
Parameter	**Condition**		**Min.**	**Typ.**	**Max.**
Quiescent Current	nom. V_{IN}= 12VDC			40mA	
	nom. V_{IN}= 24VDC			20mA	
	nom. V_{IN}= 48VDC			15mA	
Start-up time	power up, CTRL ON/OFF			10ms	20ms
ON/OFF CTRL [5]	DC-DC ON			open or high impedance	
	DC-DC OFF		2mA	3mA	4mA
Standby Current	DC-DC OFF			2.5mA	
Internal Operating Frequency			100kHz		
Output Ripple and Noise	20MHz BW			50mVp-p	
Reflected Back Ripple Current	with external components	nom. V_{IN}= 12VDC		30mAp-p	
		nom. V_{IN}= 24VDC		30mAp-p	
		nom. V_{IN}= 48VDC		20mAp-p	

Notes:


Note5: Refer to **"ON/OFF CTRL"**

R2M-2405S/SMD

Efficiency vs. Load

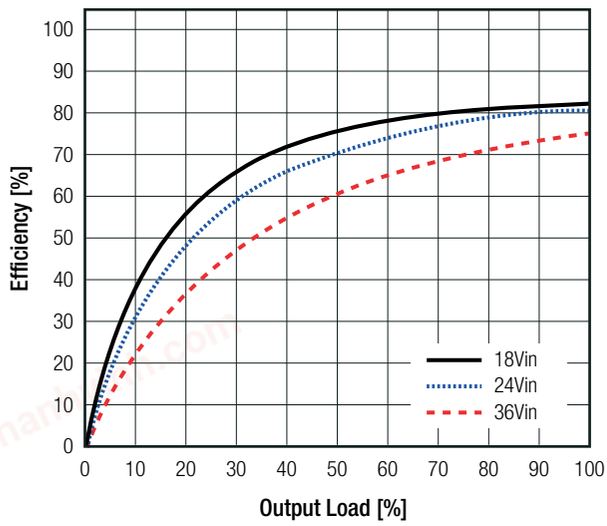


Power Dissipation vs. Load

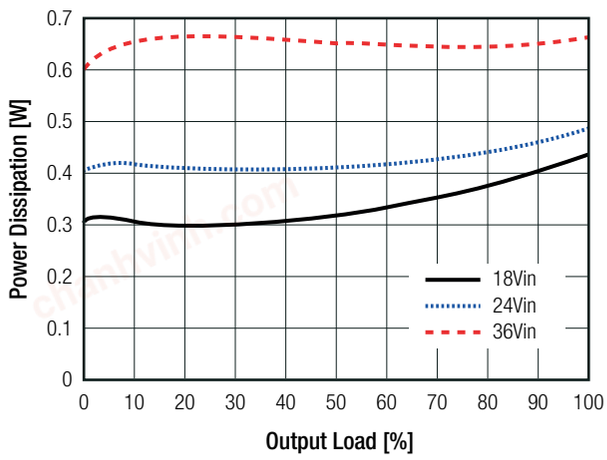


R2M-4812S/SMD

Efficiency vs. Load

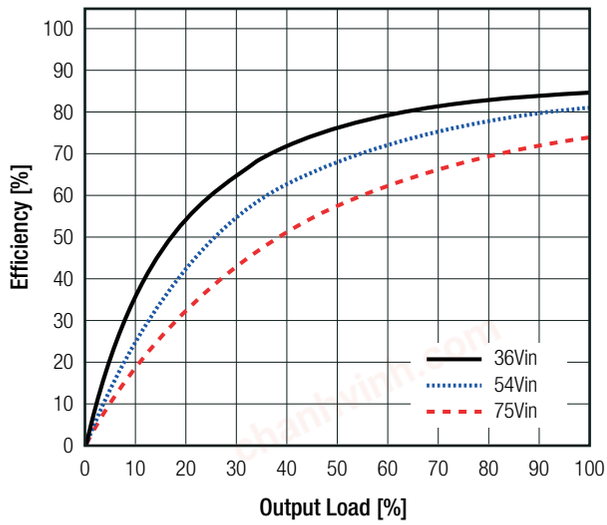

Power Dissipation vs. Load

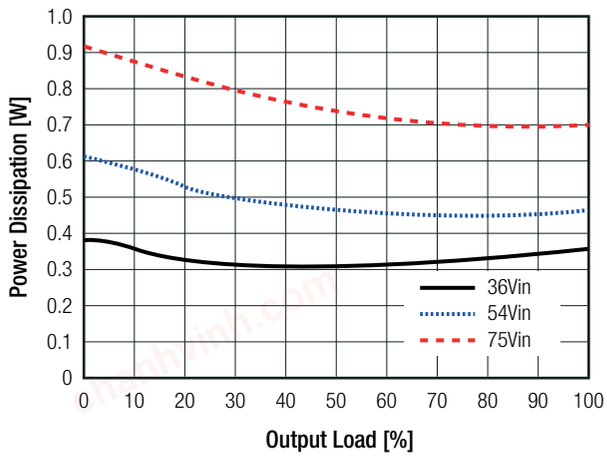


continued on next page

chanhvinh.com


Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

R2M-1212S/THT

Efficiency vs. Load

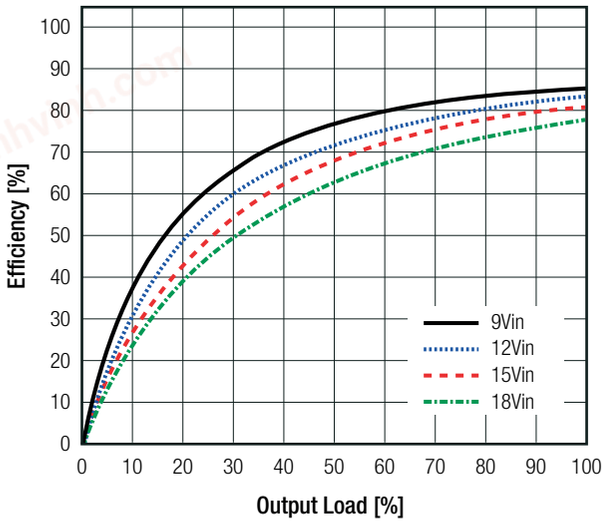


Power Dissipation vs. Load

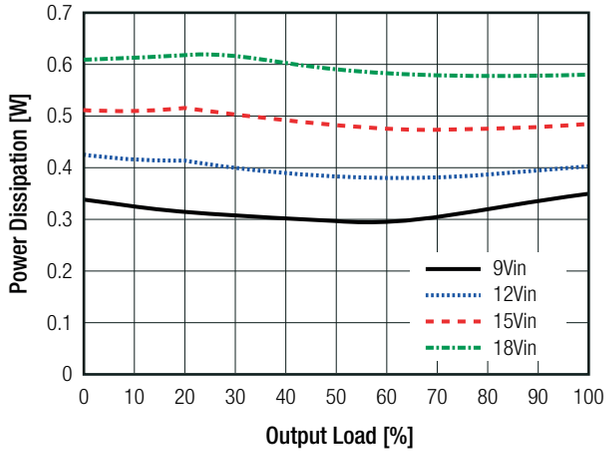


R2M-2405D/THT


Efficiency vs. Load

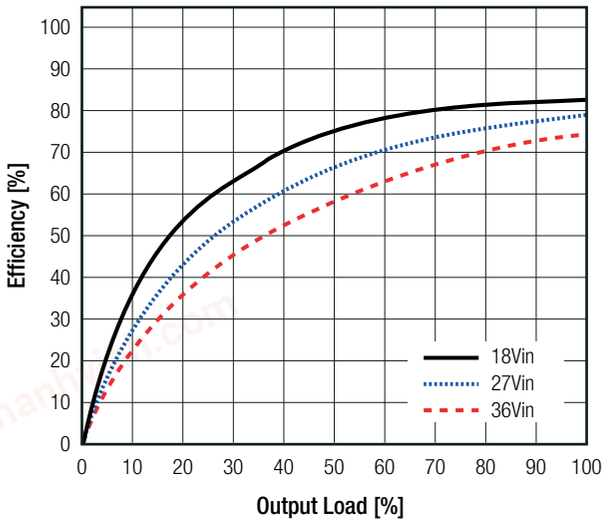

Power Dissipation vs. Load

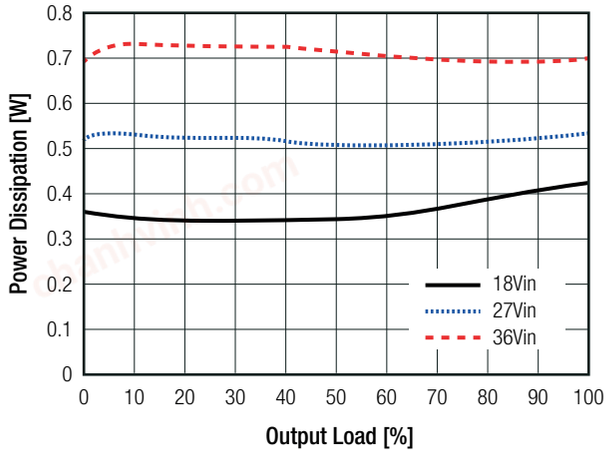

ON/OFF CTRL

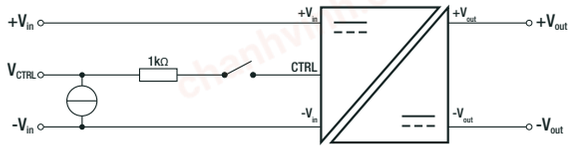

DC-DC ON	Open or high impedance
DC-DC OFF	2.0mA to 4.0mA max.

chanhvinh.com

RECOM

DC/DC Converter

R2M Series

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

REGULATIONS

Parameter	Condition		Value
Output Accuracy			±1.0% max.
Line Regulation	low line to high line, full load		±0.2% max.
Load Regulation	0% to 100% load	single	1% max.
		dual	1% max.
	10% to 90% load	single	0.5% max.
		dual	0.8% max.
Cross Regulation	asymmetrical 25% / 100% load		±5% max.
Transient Response Recovery Time	25% load step change		±250µs typ.

PROTECTIONS

Parameter	Type		Value
Short Circuit Protection (SCP)			continuous, auto recovery
Isolation Voltage (6)	I/P to O/P	1 minute	1.6kVDC min.
Isolation Resistance	I/P to O/P, V_{ISO}= 500VDC		1GΩ min.
Isolation Capacitance	I/P to O/P, 100kHz/0.1V		50pF typ.


Notes:

Note6: This power module is not internally fused. An input line fuse must always be used
Recom suggests: 12Vin=T1A; 24Vin=T0.5A; 48Vin=T0.315A slow blow

ENVIRONMENTAL

Parameter	Condition		Value
Operating Temperature Range	with derating		-40°C to +105°C
	without derating		-40°C to +85°C
Maximum Case Temperature	measured at **"tc point"**		+105°C
Operating Humidity	non-condensing		5% - 95% RH max.
Thermal Shock			according to MIL-STD-810F
Vibration			according to MIL-STD-810F
MTBF	according to MIL-HDBK-217F, G.B.	+25°C	6670 x 10^3 hours

Derating Graph
(@ Chamber and natural convection 0.1m/s)

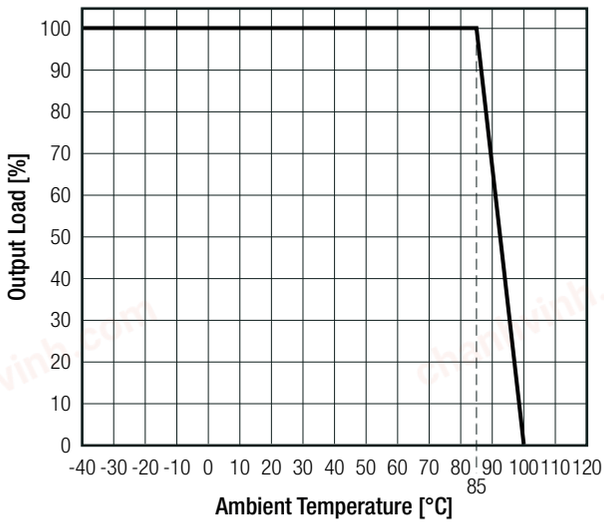

chanhvinh.com

RECOM

DC/DC Converter


R2M Series

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	File Number	Standard
RoHS2		RoHS-2011/65/EU + AM-2015/863
EMC Compliance	**Condition**	**Standard / Criterion**
Electromagnetic compatibility of multimedia equipment – Emission Requirements	with external filter refer to **"EMC Filtering"**	EN55032, Class A and B

EMC Filtering Suggestions according to EN55032

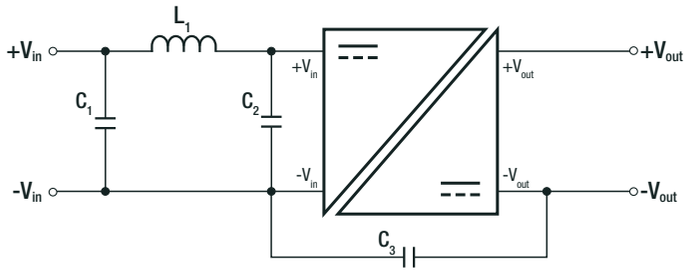

Class A Component List

Model	C1	C2	C3	L1
R2M-12xxS	22µF	N/A	220pF	6.8µH
R2M-24xxS	10µF	N/A	470pF	15µH
R2M-48xxS	2.2µF	N/A	680pF	68µH


Class B Component List

Model	C1, C2	C3	L1
R2M-12xxS	22µF	220pF	6.8µH
R2M-24xxS	10µF	470pF	15µH
R2M-48xxS	2.2µF	680pF	68µH

DIMENSION AND PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	baseplate/case	black plastic (UL94 V-0)
	potting	silicone (UL94 V-0)
Dimension (LxWxH)		14.2 x 9.1 x 10.2mm
Weight		2.7g typ.

Dimension Drawing standard "/SMD" version (mm)

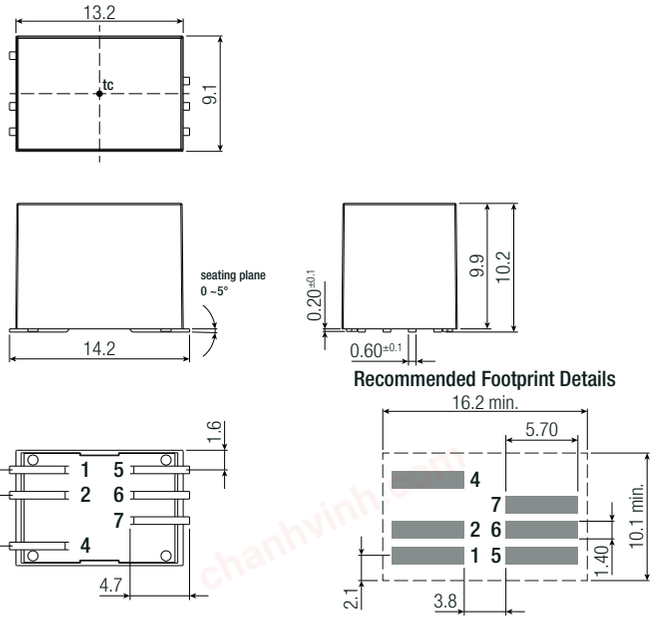

Recommended Footprint Details

Pinning Information

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
4	CTRL	CTRL
5	NC	-Vout
6	-Vout	COM
7	+Vout	+Vout

NC= no connection

Tolerance:
xx.x = ±0.5mm
xx.xx = ±0.25mm

continued on next page

chanhvinh.com


RECOM


DC/DC Converter

R2M Series

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Dimension Drawing "/THT" version (mm)

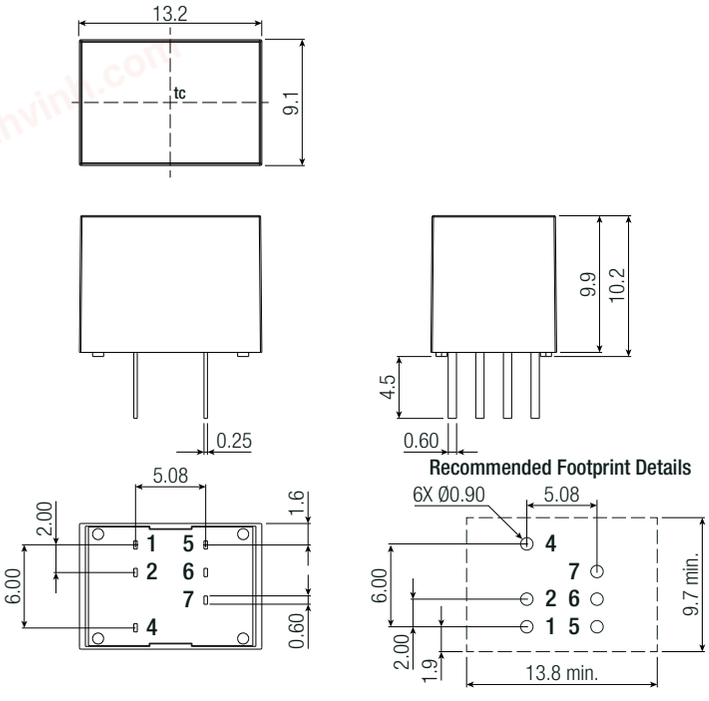



Pinning Information

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
4	CTRL	CTRL
5	NC	-Vout
6	-Vout	COM
7	+Vout	+Vout

NC= no connection

Tolerance:
xx.x = ±0.5mm
xx.xx = ±0.25mm

PACKAGING INFORMATION

Parameter	Type		Value
Packaging Dimension (LxWxH)	tube		218.0 x 17.2 x 19.9mm
Packaging Quantity			20pcs
Storage Temperature Range	non-condensing		-55°C to +125°C
Storage Humidity			5% to 95% RH max.
Moisture Sensitive Level	MSL peak temp. (7)	THT	Level 1
		SMD	Level 2

Notes:

Note7: The Moisture Sensitivity Level rating is according to the JEDEC industry standard classifications and peak solder temperature

e product information and specifications may be subject to changes even without prior written notice.The product has been designed for various applications; its suitability lies in the responsibility of each customer. The produc
ıre not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.