chanhvinh.com

# Miniature Toggle Switch

## SPECIFICATIONS:


ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
CONTACT RESISTANCE: 10mΩ max. initial @2-4VDC 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 1,500V RMS @ sea level.
OPERATING TEMPERATURE: -30°C to +85°C

## MATERIALS:

CASE: Diallyl phthalate(DAP)(UL 94V-0)
TOGGLE HANDLE: Brass, chrome plated.
BUSHING: Brass, nickel plated.
HOUSING: Stainless Steel.
TERMINAL SEAL: Epoxy.


**Art. Nr.**
**RND 210-00494**



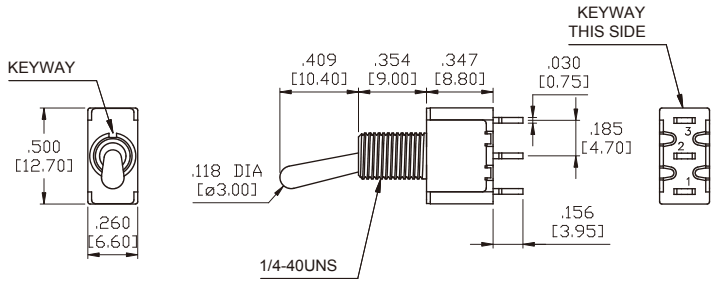



## BUSHING

### THD




chanhvinh.com

## PANEL MOUNTING

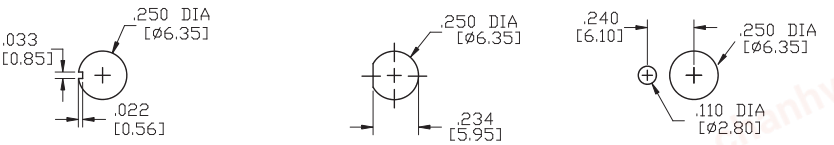


## TERMINATION

STD. SOLDER LUG




THK .030 [0.75]

## ACTUATOR

