chanhvinh.com

USB-C to USB-Lightning Cable

Features





- USB 2.0 offering speeds of up to 480 Mbps
- All-copper conductors – for interference-free signal transmission
- Suitable for a wide range of applications
- Specially designed for durability and intended for intensive use

Specification

Cable Design	Round
Connector A	USB-C Plug
Connector B	Apple Lightning
Cross-Section AWG	21 AWG
External Material	PVC
Function	Multi Sync and Charge
Jacket Colour	White
Length	2 m
Plating Material	Nickel
Speed Max. (Data)	480 Mbps
Standards Met	RoHS;REACH
USB Type	USB 2.0

Drawing



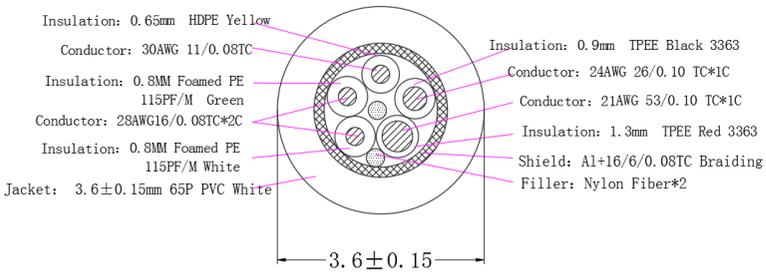

Wiring Diagram


100nF*2


Type C Pin	Signal Name	color of cable	Lightning pin C94
A4、A9、B4、B9	USB Vbus	Red	1
A7	USB D-	White	2
A6	USB D+	Green	3
A5	CC	Yellow	4
A1、A12、B1、B12	DGND	Black	5
Shield	Shield	TC	Shield

Art. Nr.
RND 765-00310

chanhvinh.com

Drawing

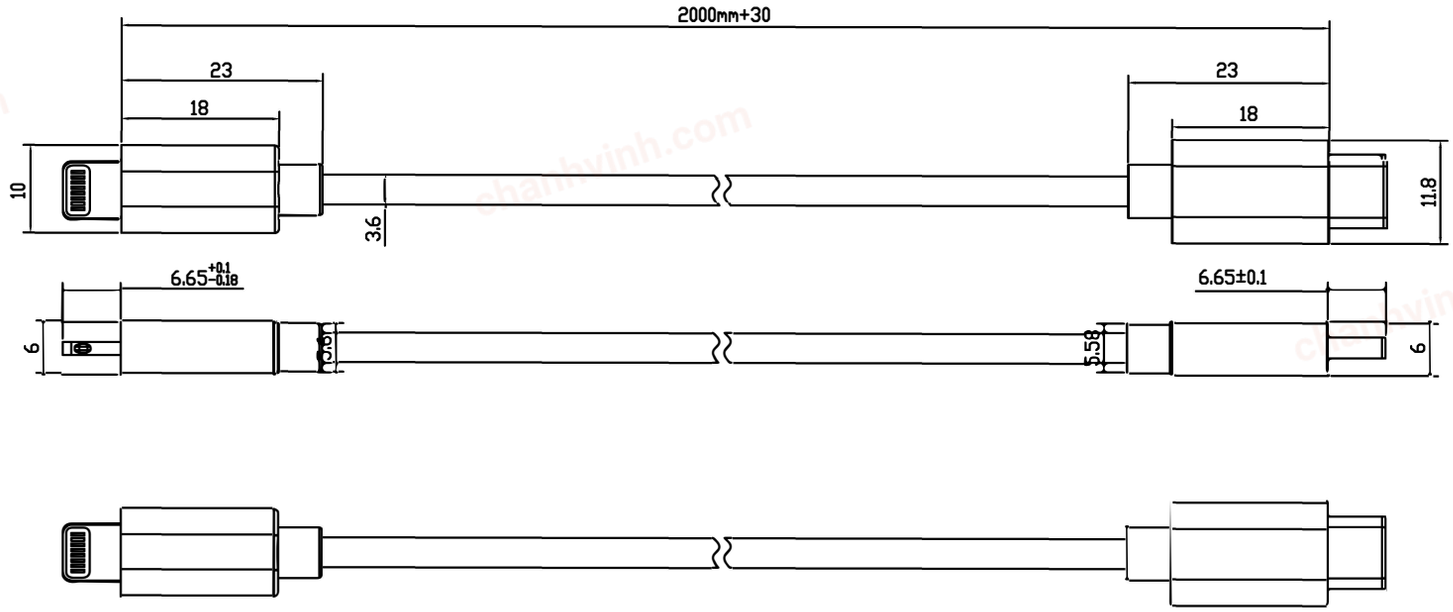

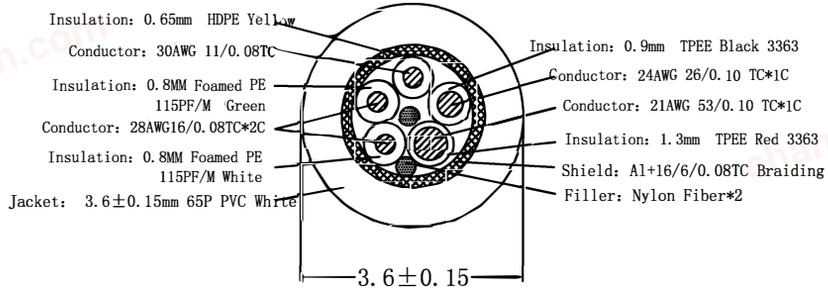

Wiring Diagram

	Type C Pin	Signal Name	color of cable	Lightning pin C94
100nF*2	A4、A9、B4、B9	USB Vbus	Red	1
	A7	USB D-	White	2
	A6	USB D+	Green	3
	A5	CC	Yellow	4
	A1、A12、B1、B12	DGND	Black	5
	Shield	Shield	TC	Shield

Art. Nr.
RND 765-00310