
chanhvinh.com

Single Digit LED Numeric Display

LA-301 B / L Series

LA-301 B / L series is developed because of the demand for small single digit LED Numeric Display. Materials of emission are GaAsP on GaP, AlGaInP, GaP and GaN. This is the height of a letter 8mm, single digit LED Numeric Display that is packed by epoxy resin.

●**Dimensions** (Unit : mm)

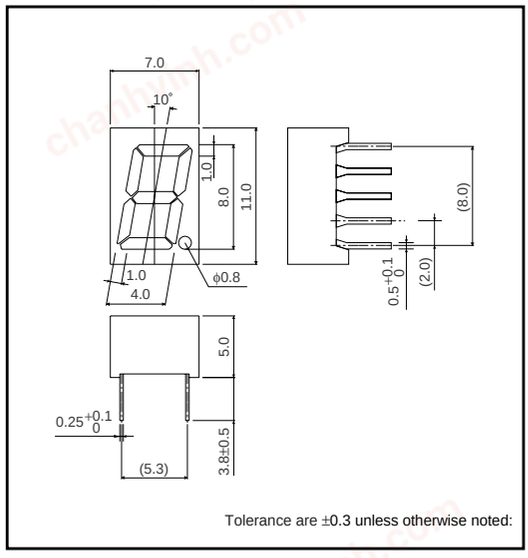


●**Features**

1) The height of a letter is 8mm.
2) The light don't leak from the segment in spite of the small package.
3) The package of surface color is black. Color of segment is colored in emitting color. (Blue color is only milky white)
4) Each color has anode common and cathode common respectively.

●**Selection guide**


Emitting color / Common	Red	Red (High brightness)	Orange (High brightness)	Yellow (High brightness)	Green	Blue
Anode	LA-301VB	LA-301AB	LA-301EB	LA-301XB	LA-301MB	LA-301BB
Cathode	LA-301VL	LA-301AL	LA-301EL	LA-301XL	LA-301ML	LA-301BL

●**Pin assignments**




Pin No.	Function
1	Segment "a"
2	Segment "f"
3	Segment "g"
4	Segment "e"
5	Segment "d"
6	D.P Cathode
7	D.P Anode
8	Segment "c"
9	Common
10	Segment "b"

●**Equivalent circuit (anode common)**



(cathode common)



chanhvinh.com

●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Red	Red (High brightness)	Orange (High brightness)	Yellow (High brightness)	Green	Blue	Unit
		LA-301VB / VL	LA-301AB / AL	LA-301EB / EL	LA-301XB / XL	LA-301MB / ML	LA-301BB / BL	
Power dissipation	P_D	320	520	520	520	480	336	mW
Power dissipation	P_D / seg	40	65	65	65	60	42	mW
Forward current	I_F	15	25	25	25	20	10	mA
Peak forward current	I_{FP}	60 *1	50 *2	50 *2	50 *2	60 *1	50 *2	mA
Reverse voltage	V_R	5	5	5	5	5	5	V
Operating temperature	Topr	–25 to +75						˚C
Storage temperature	Tstg	–30 to +85						˚C

*1 Pulse width 1ms Duty 1 / 5
*2 Pulse width 0.1ms Duty 1 / 10

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Conditions	Red		Red (High brightness)		Orange (High brightness)		Yellow (High brightness)		Green		Blue		Unit
			Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	
Forward voltage	V_F	I_F=10mA	2.0	2.8	2.05 *	2.6 *	2.05 *	2.6 *	2.05 *	2.6 *	2.1	2.8	3.6	4.2	V
Reverse current	I_R	V_R=3V	–	100	–	100	–	100	–	100	–	100	–	100	μA
Peak wavelength	λ_P	I_F=10mA	650	–	626 *	–	610 *	–	589 *	–	563	–	470	–	nm
Spectral line half width	$\Delta\lambda$	I_F=10mA	40	–	18 *	–	17 *	–	15 *	–	40	–	26	–	nm

◎The products are not radiations resistant.
* Shows the number on the condition of I_F=20mA.

●Luminous intensity

Color	λ_P (nm)	Type	Min.	Typ.	Unit
Red	650	LA-301VB LA-301VL	3.6	10	mcd
Red (High brightness)	626	LA-301AB LA-301AL	36	90	mcd
Orange (High brightness)	610	LA-301EB LA-301EL	36	90	mcd
Yellow (High brightness)	589	LA-301XB LA-301XL	36	90	mcd
Green	563	LA-301MB LA-301ML	3.6	10	mcd
Blue	470	LA-301BB LA-301BL	14	56	mcd

◎A condition of measurement is I_F=10mA.

chanhvinh.com

●Electrical and optical characteristic curve

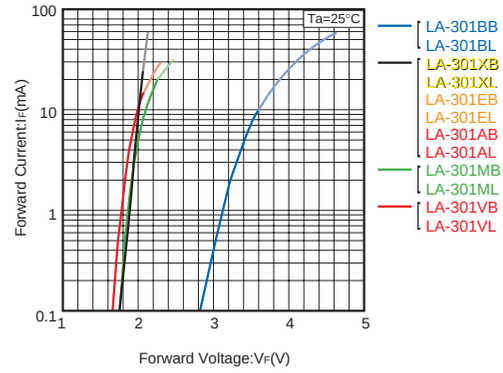


Fig.1 Forward Current - Forward Voltage

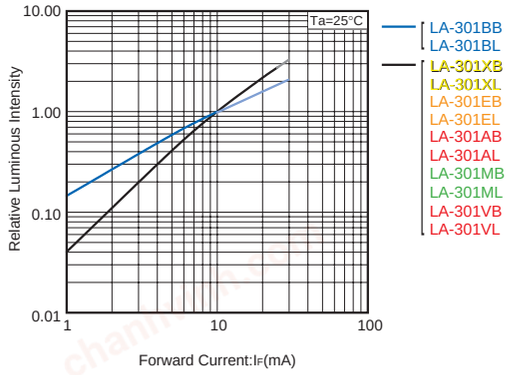


Fig.2 Relative Luminous Intensity - Forward Current

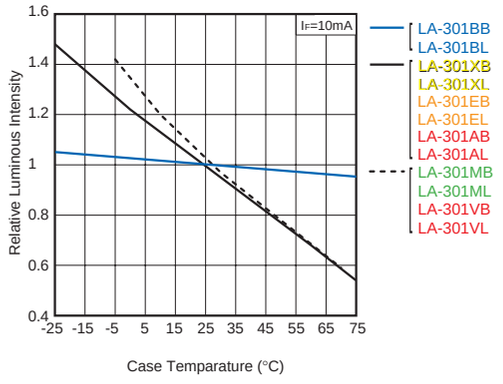


Fig.3 Relative Luminous Intensity - Case Temperature

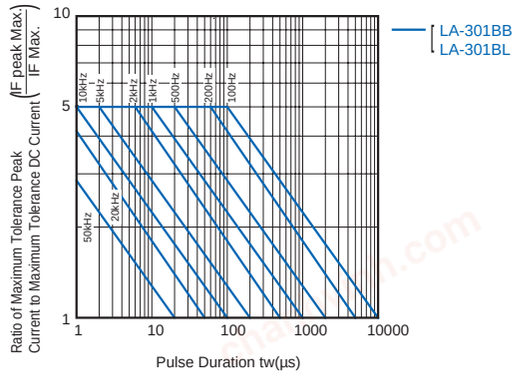


Fig.4 Ratio of Maximum Tolerable Peak Current - Pulse Duration (I)

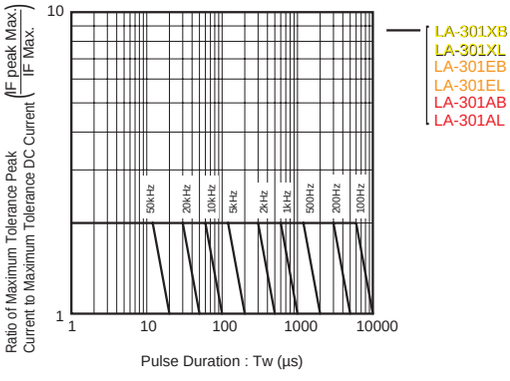


Fig.5 Ratio of Maximum Tolerable Peak Current - Pulse Duration (II)

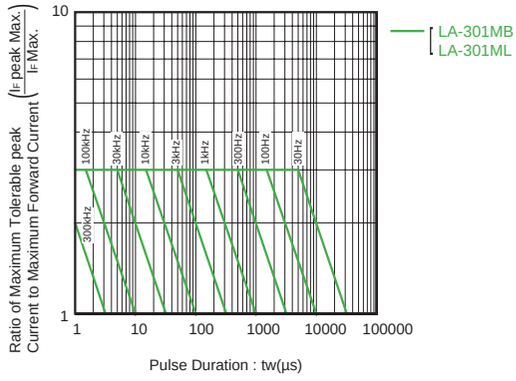


Fig.6 Ratio of Maximum Tolerable Peak Current - Pulse Duration (III)

chanhvinh.com

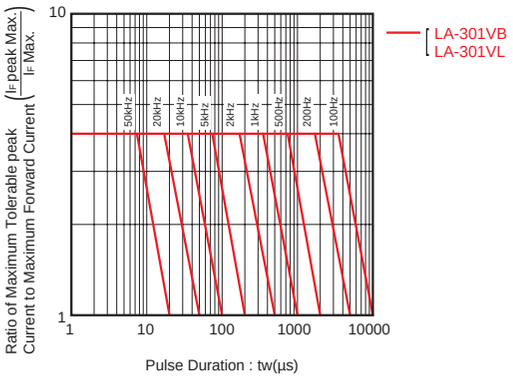


Fig.7 Ratio of Maximum Tolerable Peak Current - Pulse Duration (IV)

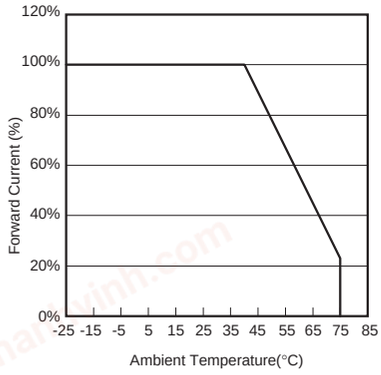


Fig.8 Derating

chanhvinh.com

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).
Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.
It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2008 ROHM CO.,LTD.

ROHM CO., LTD. 21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan
TEL : +81-75-311-2121
FAX : +81-75-315-0172