
chanhvinh.com

# ROLINE USB4 Gen3x2 Cable, PD (Power Delivery) 20V5A, with Emark, C-C, M/M, black, 15 cm

| | |
|---|---|
| **Product No.** | 11.02.9078 |
| **Manufacturer** | ROLINE |
| **Manufacturer No.** | 11.02.9078 |
| **EAN (single piece)** | 7630049628595 |

roline
Designed for Professionals



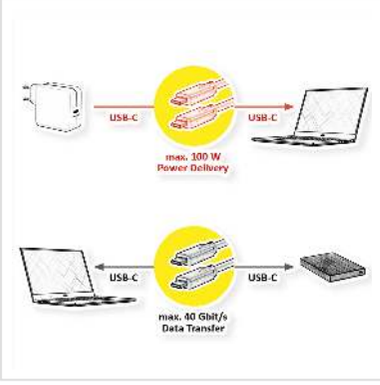




**ROLINE USB4 flat silicone cable with data transfer rates of up to 40 Gbit/s and support of PD (Power Delivery) at up to 20V5A. The silicone-sheathed flat cable not only looks great, but also allows extremely flexible use thanks to its small bending radius.**

- USB4 cable in high quality
- With USB type C connectors on both sides
- Suitable for data transfer rates of up to 40 Gbit/s
- USB power supply with up to 20V5A
- Rugged aluminum plugs and a flexible, flat silicone cable for optimal durability
- Supports video transfer
- Colour: black

**ROLINE USB4 cable - USB C connector on both sides - Charging and data cable for Smartphones, Tablets, MacBooks or Ultrabooks/Notebooks**

The major benefits of the USB4 includes faster transfer speeds (up to 40 Gbit/s), a better management of video bandwidth (using a process called "protocol tunneling" that sends DisplayPort, PCIe and USB packets at the same time while allocating bandwidth accordingly) and optional compatibility with Thunderbolt 3 products.

| Technical specifications | |
|---|---|
| Manufacturer | ROLINE |

| | |
|---|---|
| Product group | Cable |
| Product type | USB4 Cable |
| Colour | black |
| Length | 15 cm |
| Transfer quality | USB4 Gen3x2 40 Gbit/s |
| Connection ports | USB Type C (USB-C) Male / USB Type C (USB-C) Male |
| Side 1 Connector Type | USB Type C (USB-C) |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | USB Type C (USB-C) |
| Side 2 Connector Gender | Male |
| Colour (Cable) | black |
| Ribbon cable | yes |
| Maximum data transfer rate | 40 Gbit/s |
| Area of application | External |
| Supported charging technology | USB-PD - USB Power Delivery |
| Power (max.) | 100 W |
| Hand locking screws | no |
| Depth | 150 mm |
| Weight | 11 g |
| Height of packaging (single piece) | 10 mm |
| Width of packaging (single piece) | 10 mm |
| Depth of packaging (single piece) | 140 mm |
| Package weight (single piece) | 0.017 kg |