
chanhvinh.com

UNIT	MM

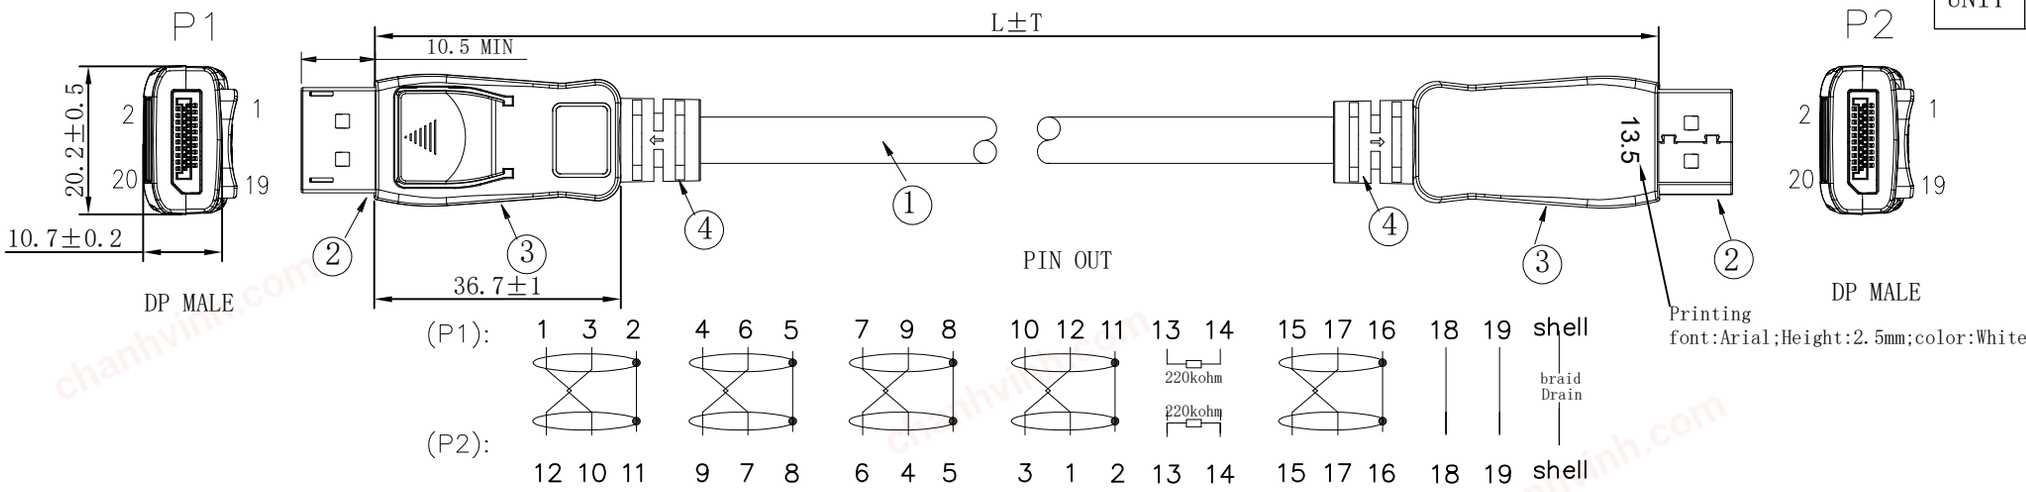

NOTES:

1. Electrical test:
   (1). 100% open short & miss wire test;
   (2). Insulation resistance:DC 300V 10M ohm min;
   (3). Contactor resistance:3 ohm max;
   (4). Displayport practical application Test Pass 4k*2k@120HZ
2. Feature:
   ▪DP80 UHBR13.5 54G version
   ▪Transfer of Audio and Video signal
   ▪Audio signal ; 1－8 channels, 16 or 24-bit linear PCM;
   32－192 kHz sampling rate; maximum bitrate 36,864 kbit/s (4,608 kB/s)
   ▪Data transfer rate: 54Gbps
   10240×4320@60Hz with DSC,7680×4320@60Hz
   ▪3840×2160@120Hz,4:4:4 8bit, 3840×2160@144Hz,4:4:4
   ▪Support HDCP2.2/DPCP/3D/Dolby MAT/DTS HD/HDR10/DSC1.2
   ▪Support multi-streaming /MST
3. ROHS 2.0 AND REACH COMPLIANT
4. Storage temperature : -20℃--+80℃
   Operation temperature: -10℃--+60℃

MATERIAL LIST:

④	TUBE END	BLACK PVC	2	
③	HOUSING	PC+ABS BLACK	2	
②	CONNECTOR	DP 20P/M SOLDER TYPE,ORANGE INSULATION,+IRON SHELL SHIELDING, THE PIN GOLD PLATED ,THE SHELL FOR GOLD PLATED	2	
①	CABEL	DP2.1 (28AWG BC*1P+AL-FOIL+ADHESIVE-PET)*5P+30AWG BC*2C+ADB BLACK PVC JACKET OD:7.3±0.2MM	L±T	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
		NEW	2023-07-25	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

11.04.6024	ROLINE DP 2.1 CABLE, UHBR13.5/54Gbit/s 10K@60Hz, L:5m	5000±70
11.04.6023	ROLINE DP 2.1 CABLE, UHBR13.5/54Gbit/s 10K@60Hz, L:3m	3000±50
ITEM NO.	DESC.	Length(mm)

SECOMP