chanhvinh.com

Datenblatt - Fiche technique - Data sheet

21.15.2604




ROLINE Patchkabel Kat.6 S/FTP (PiMF), Component Level, LSOH, grau, 1,5 m

Cordon ROLINE S/FTP(PiMF) Cat.6, LSOH, Component Level, gris, 1,5 m

ROLINE S/FTP Patch Cord Cat.6 Component Level, LSOH, grey, 1.5 m

chanhvinh.com

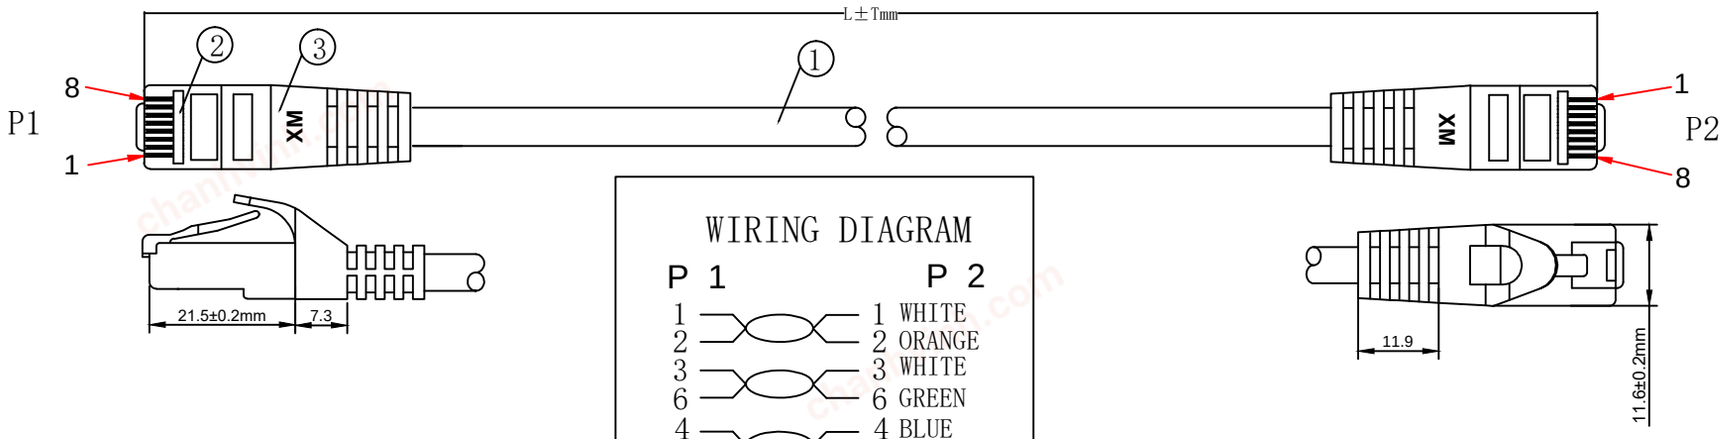

WIRING DIAGRAM

P 1		P 2
1		1 WHITE
2		2 ORANGE
3		3 WHITE
6		6 GREEN
4		4 BLUE
5		5 WHITE
7		7 WHITE
8		8 BROWN
SH		SH

1. ELECTRICAL TEST:
   (1). 100% OPEN SHORT & MISS WIRE TEST;
   (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
   (3). CONTACTOR RESISTANCE:30 OHM MAX
2. PRINTING:GHMT® roline CAT.6 S/FTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2
3. 100% Component Patch cord Test PASS
4. Minimum bending radius:60mm

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Grey	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u",SHELL PLATED NICKEL Transparent RED	2PCS	
①	CABLE	S/FTP CAT.6 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2±0.2MM	1PCS	

COLOUR:GRAY(RAL 7035)

ITEM NO.	LENGTH(L)	TOLERANCE(T)
21.15.2951	300mm	±10mm
21.15.2600	500mm	±15mm
21.15.2601	1000mm	±30mm
21.15.2604	1500mm	±45mm
21.15.2602	2000mm	±60mm
21.15.2603	3000mm	±90mm
21.15.2605	5000mm	±150mm
21.15.2606	7500mm	±210mm
21.15.2607	10000mm	±300mm
21.15.2608	15000mm	±450mm
21.15.2609	20000mm	±600mm

ITEM NO.	21.15.2951	21.15.2600	21.15.2601	21.15.2602	21.15.2603
21.15.2604	21.15.2605	21.15.2606	21.15.2607	21.15.2608	21.15.2609
DESC.	ROLINE S/FTP PatchCord CAT.6,LSOH,Comp.Level,grey				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ARVIN	ALVAN	CHANGE COLOR GREY	2016-11-28	A1
		NEW	2016-10-20	A

SECOMP