

chanhvinh.com

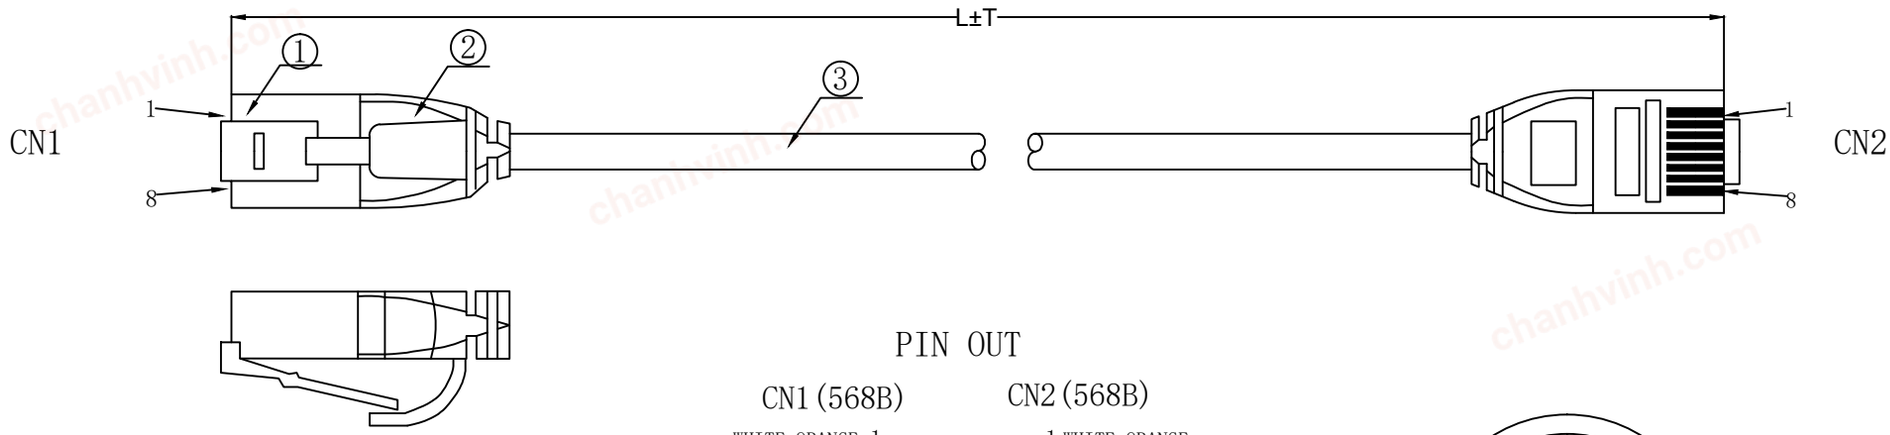

PIN OUT

CN1 (568B)		CN2 (568B)
WHITE-ORANGE	1 — 1	WHITE-ORANGE
ORANGE	2 — 2	ORANGE
WHITE-GREEN	3 — 3	WHITE-GREEN
GREEN	6 — 6	GREEN
BLUE	4 — 4	BLUE
WHITE-BLUE	5 — 5	WHITE-BLUE
WHITE-BROWN	7 — 7	WHITE-BROWN
BROWN	8 — 8	BROWN

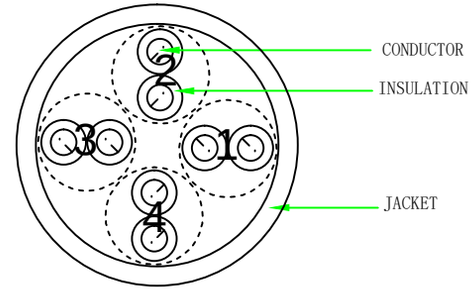

NOTE:


1. Fluke Channel Test ISO 11801 channel Class Ea
2. RoHS2.0 AND REACH compliant
3. Electrical test:100% open short & miss wire test;
4. OPERATING TEMPERATURE:-10℃ ~ 60℃
5. Print word: CAT6A U/UTP 4x2x32AWG/7 LSZH ISO11801 & EN50173 & ANSI/TIA568C.2
6. Minimum of the bending radius is 30mm(Suitable for all meters)

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
③	CABLE	CAT.6A U/UTP CABLE (32AWG BC*1P)*4+JACKET:LSZH/BLUE,OD:3.4±0.2mm	1	
②	Over mold	48P PVC/BLUE	2	
①	Plug	RJ45 8P8C Unshielded Plug, PIN GOLD PLATED 3u", TRANSPARENT	2	

Color: Blue(Pantone 647C)	
ITEM No.	LENGTH
21.15.3940	150±5mm
21.15.3941	300±10mm
21.15.3942	500±30mm
21.15.3943	1000±30mm
21.15.3944	1500±50mm
21.15.3945	2000±50mm
21.15.3946	3000±70mm
21.15.3947	5000±70mm

Minium of the bending3



BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2019-06-17	A

DESC.	ROLINE Cat.6A UTP Patch Cord, LSOH, Slim, Blue

SECOMP