
chanhvinh.com

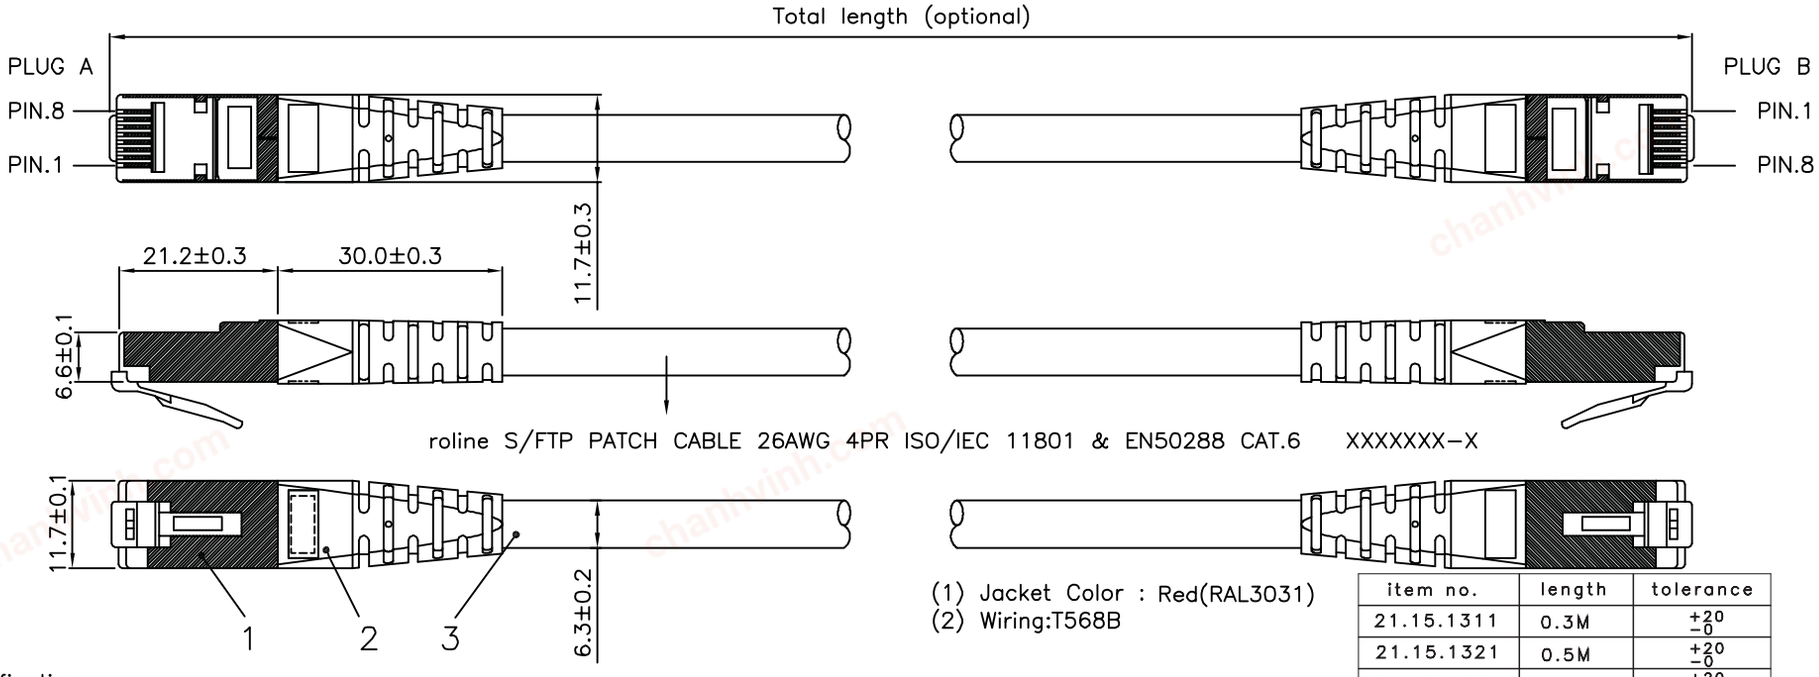

(1) Jacket Color : Red(RAL3031)
(2) Wiring:T568B

item no.	length	tolerance
21.15.1311	0.3M	+20 −0
21.15.1321	0.5M	+20 −0
21.15.1331	1M	+20 −0
21.15.0824	1.5M	+20 −0
21.15.1341	2M	+20 −10
21.15.1351	3M	+20 −10
21.15.1361	5M	+30 −20
21.15.1371	7M	+30 −20
21.15.1381	10M	+30 −20
21.15.1391	15M	+30 −20
21.15.1401	20M	+70 −30

Specification :

Material :
1. RJ45 Plug :
   1−1. Housing : Polycarbonate,Transparent color.
   1−2. Contact material : Phosphor Bronze with 50−60 micro−inch Nickel plated.
   1−3. Contact finished : Min. 50 micro−inch Gold plated on surface contact area.
   1−4. Shield : Bronze with Nickel plated.
2. Molding : PVC.
3. Cable :
   3−1. Jacket : PVC.
   3−2. Conductor : 26 AWG stranded copper.
   3−3. Isolation : PE.
   3−4. Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
4. Cable structure : S/FTP, 4 twisted pair.
5. Minimum Bending Radius: 50mm

item no	21.15.1311	21.15.1321	21.15.1331	21.15.0824	21.15.1341
21.15.1351	21.15.1361	21.15.1371	21.15.1381	21.15.1391	21.15.1401
Desc	ROLINE Cat 6 S/FTP Patch Cord,Red				

"#": Matching DIM.
"*": Important DIM.
Others General DIM.

GENERAL TOLERANCE OF DIMENSIONS
X.XXX ±0.005
X.XX ±0.05
X.X ±0.1

DRAWING	23.JuL.2016	byz	SECOMP
CHECK	23.JuL.2016	Jane	
APPROVAL	23.JuL.2016	Jaimy	
	DATE	NAME	
SCALE	1/1 (A4)	UNIT	mm

DRAWING NO.
DRAWING CLASSIFICATION | S | SHEET 1 OF 1 | A1

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER