
chanhvinh.com

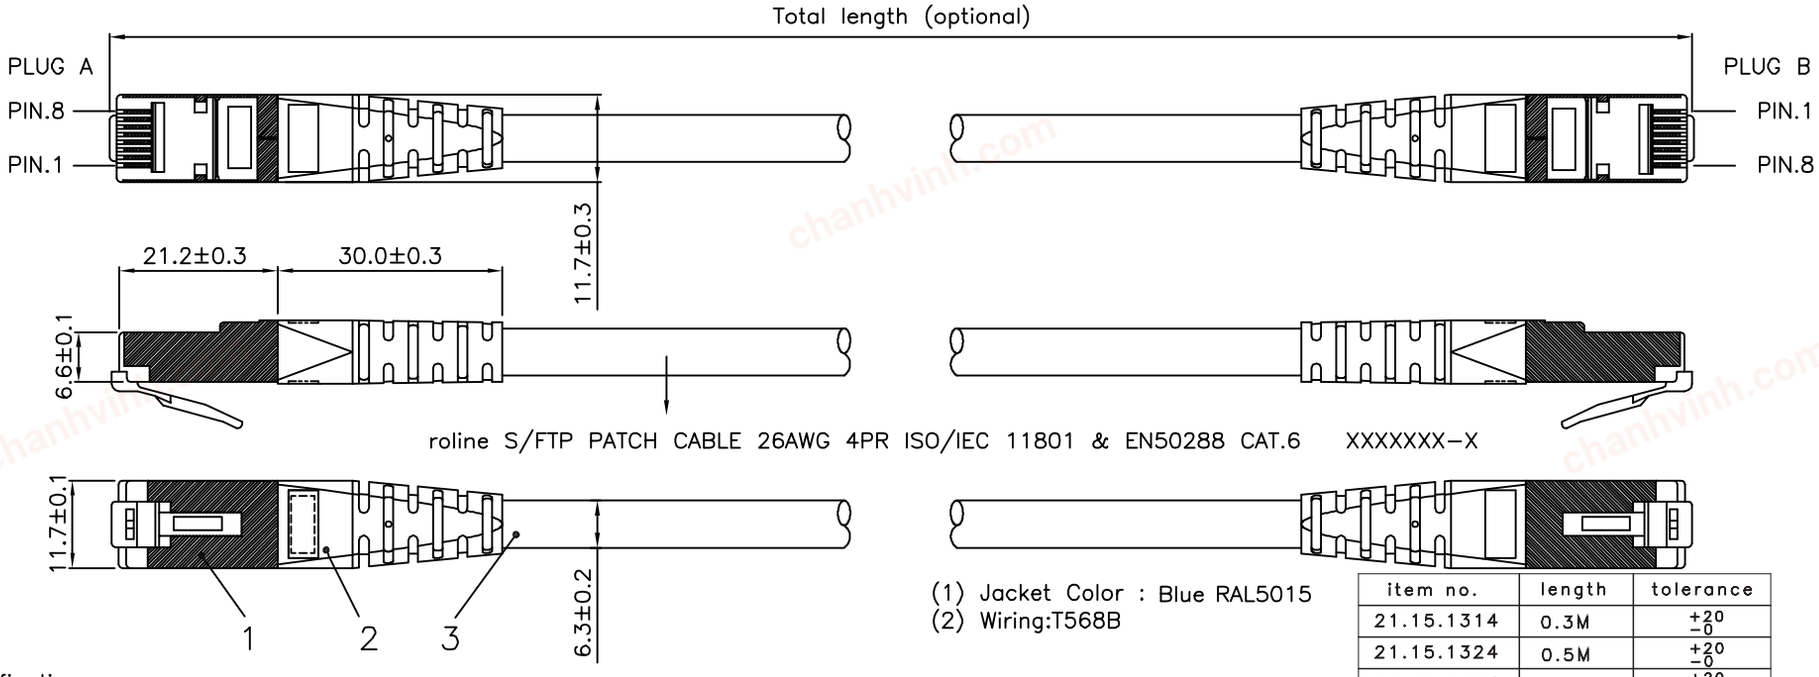

(1) Jacket Color : Blue RAL5015
(2) Wiring:T568B

item no.	length	tolerance
21.15.1314	0.3M	+20 −0
21.15.1324	0.5M	+20 −0
21.15.1334	1M	+20 −0
21.15.0827	1.5M	+20 −0
21.15.1344	2M	+20 −10
21.15.1354	3M	+20 −10
21.15.1364	5M	+30 −20
21.15.1374	7M	+30 −20
21.15.1384	10M	+30 −20
21.15.1394	15M	+30 −20
21.15.1404	20M	+70 −30

Specification :

Material :
1. RJ45 Plug :
   1−1. Housing : Polycarbonate,Transparent color.
   1−2. Contact material : Phosphor Bronze with 50−60 micro−inch Nickel plated.
   1−3. Contact finished : Min. 50 micro−inch Gold plated on surface contact area.
   1−4. Shield : Bronze with Nickel plated.
2. Molding : PVC.
3. Cable :
   3−1. Jacket : PVC.
   3−2. Conductor : 26 AWG stranded copper.
   3−3. Isolation : PE.
   3−4. Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
4. Cable structure : S/FTP, 4 twisted pair.
5. Minimum Bending Radius: 50mm

item no	21.15.1314	21.15.1324	21.15.1334	21.15.0827	21.15.1344
21.15.1354	21.15.1364	21.15.1374	21.15.1384	21.15.1394	21.15.1404
Desc	ROLINE Cat 6 S/FTP Patch Cord,Blue				

"#": Matching DIM.
"*": Important DIM.
Others General DIM.

GENERAL TOLERANCE OF DIMENSIONS
X.XXX ±0.005
X.XX ±0.05
X.X ±0.1

DRAWING	23.JuL.2016	byz	
CHECK	23.JuL.2016	Jane	
APPROVAL	23.JuL.2016	Jaimy	
	DATE	NAME	
SCALE	1/1 (A4)	UNIT	mm

SECOMP

DRAWING NO.
DRAWING CLASSIFICATION | S | SHEET | 1 OF 1 | A1

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER

0 10cm