Cartridge Fuses

Features

- Ceramic Tube Fuses
- 6,35x32 mm size
- RoHS compliant & Pb free

RS PRO Cartridge Fuses

RS Stock No.: 0180072



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

chanhvinh.com

Cartridge Fuses

Product Description

Cartridge fuses are a relatively cheap way of protecting electrical equipment from short circuits and overcurrent and can be used to protect electrical appliances such as motors air-conditions, refrigerator, pumps etc. They can be found in the following areas:
Industrial
Commercial
Home/Residential
Automotive

RS PRO have a range of cartridge fuses types to suit all your requirements.

Electrical Specifications

Current Rating	15A
Operating Temperature	-55°C to 125°C
Storage Temperature:	-55°C to 85°C
Solderability:	245°C±5°C，5s±0.5s
Fuse Type	Ceramic Tube Fuse (Fast-Blow)
Fuse Size	6,35x32 mm
Testing Standard	UL 248-1, UL 248-14
Body Material	Ceramic

Electrical Characteristics

% of CURRENT RATING	BLOWING TIME
110%	4 hours Min.
135%	1 hour Max.
200%	120 seconds Max.


Approvals

Compliance/Certifications	UL(cUL), PSE, RoHS
Declarations	UL 248-1, UL 248-14


chanhvinh.com

Cartridge Fuses


65NM



65NM(P)

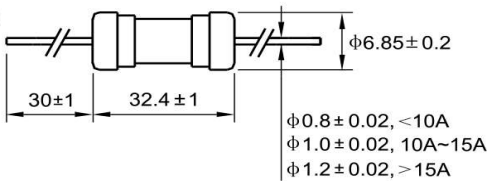

65NM AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

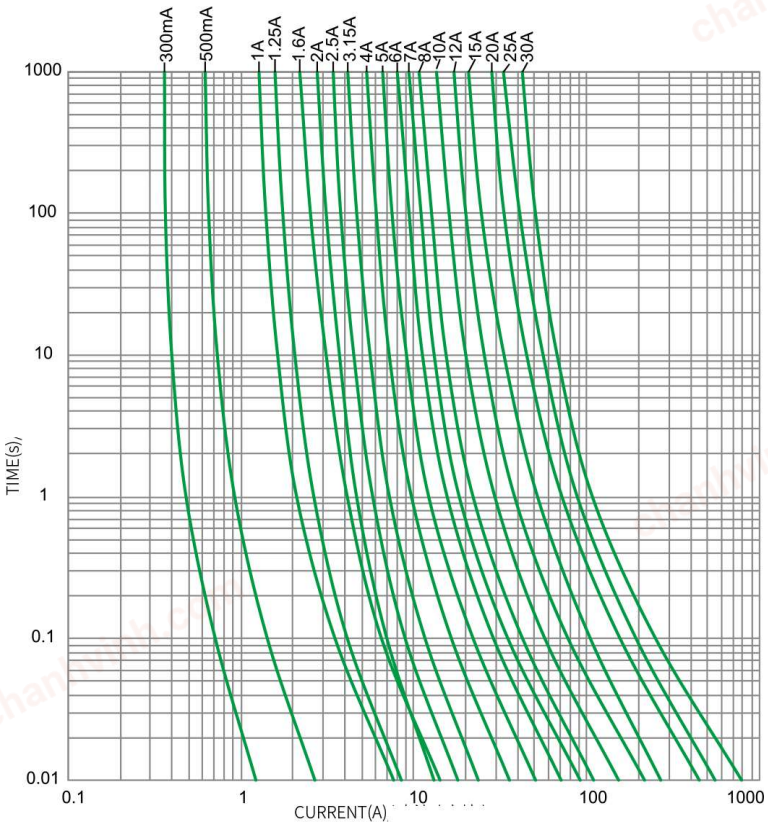

Due to our policy of continuous product improvement, we reserve the right to discontinue or change product specifications or designs at any time without notice and without incurring obligations. You should always contact us for the most up-to-date information on our products