chanhvinh.com

Internal




## Features

- Uncoated version
- For high temperature applications
- Quick installation
- UV-resistant, Halogen free, non toxic
- 316 grade stainless steel, for extra corrosive environments
- Fireproof

# RS PRO UNCOATED BALL-LOCK 316 STAINLESS STEEL CABLE TIES

**RS Stock No.: 2769566**

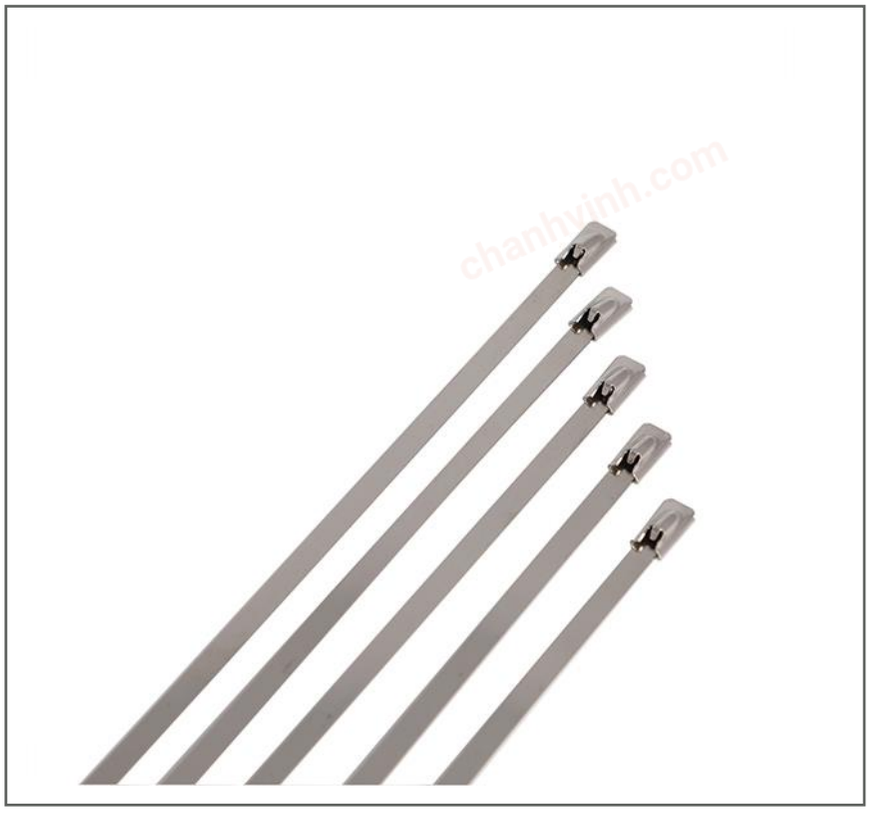

RS PRO is the own brand of RS. The RS PRO Seal of Approval is your assurance of professional quality, a guarantee that every part is rigorously tested, inspected, and audited against demanding standards. Making RS PRO the Smart Choice for our customers.

# Cable Ties

## Product Description

- *Self locking design for fast and secure installation.*
- *Resistant to UV light and suitable for use outdoors and indoors.*
- *Superior corrosion resistance in corrosive industrial, marine atmospheres, salt water and chemical environments.*
- *Ideal for petrochemical, industries, power stations, mining, ship-building, offshore, and other aggressive environments.*

## General Specifications

| | |
|---|---|
| **Series** | CT-SS-BL |
| **Type** | Non-Releasable |
| **Colour** | Metallic |
| **Material** | Stainless Steel Grade 316 |
| **Finish** | |
| **Application** | Bundling & Tightening |
| **Resistant To** | Chemical and Corrosion resistance |
| **UV Resistant** | Yes |
| **Minimum Operating Temperature** | -80°C |
| **Maximum Operating Temperature** | 500°C |
| **Fire Behaviour** | Self-Extinguishing |
| **Quantity** | 100 |

## Mechanical Specifications

| | |
|---|---|
| **Length** | 1200mm |
| **Width** | 12mm |
| **Tensile Strength** | 2500N |
| **Maximum Bundle Strength** | 301mm |
| **Thickness** | |
| **Cable Diameter** | |

chanhvinh.com



# Cable Ties

## Protection Category

| | |
|---|---|
| **IP Rating** | |

## Classification

| | |
|---|---|
| **eCl@ss** (10.0.1) | |
| **UNSPSC** (6.01) | |

## Approvals

| | |
|---|---|
| **Declarations** | ROHS Declaration of Conformity |
| **Standards Met** | UL |

## Similar Products

| Stock No. | Brand | Product Name | Colour | Material | Tensile Strength |
|---|---|---|---|---|---|
| **183-4269** | RS PRO | CT-SS-BL-1200/12FC | Black | Polyester coated SS316 | 2500N |

INSTRUCTION FOR USE / ADDITIONAL INFORMATION / DIAGRAMS / ILLUSTRATIONS / ACCESSORIES