# Pneumatic Quick Connect Couplings

## Features

- Maximum operating pressure is 35 bar.
- Operating temperature range -20°C to +100°C.
- Material: Brass Nickel-Plated Finish
- Single Shut Off (One side is with valve)
- Euro Profile
- DN7.2
- Flow 1000 l/min
- Compatible with:

  TST SWING COUPLING C

  TST 025

  PARKER - RECTUS 25

  CEJN 320

  JWL 520, 530

  PARKER PE

## RS PRO Pneumatic Quick Connect Coupling

RS Stock No.: 0325367



RS PRO is the own brand of RS. The RS PRO Seal of Approval is your assurance of professional quality, a guarantee that every part is rigorously tested, inspected, and audited against demanding standards. Making RS PRO the Smart Choice for our customers.

# Pneumatic Quick Connect Couplings

## Product Description

**RS PRO Series 26 Quick Connect Couplings**
Pneumatic quick-connect coupling connectors are found across industry in pneumatic systems as diverse as robotic assembly lines and other equipment.

- Maximum operating pressure is 35 bar.
- Operating temperature range -20°C to +100°C.
- Material: Brass Nickel-Plated Finish
- Single Shut Off (One side is with valve)
- Euro Profile
- DN7.2
- Flow 1000 l/min
- Compatible with:
  TST SWING COUPLING C
  TST 025
  PARKER - RECTUS 25
  CEJN 320
  JWL 520, 530
  PARKER PE

## Specifications

| | |
|---|---|
| **Manufacturer Series** | 026 |
| **Coupling Type** | Quick Connect Coupling Plug |
| **Connection Standard** | DN 7.2 Euro Profile |
| **Connection Standard Compatible With** | TST 025; PARKER RECTUS 25, CEJN 320; JWL 520 & 530; PARKER PE |
| **Minimum Operating Temperature** | -20°C |
| **Maximum Operating Temperature** | +100°C |
| **Maximum Operating Pressure** | 35bar |
| **Flow** | 1000 l/min |
| **Flow Direction & Sealing** | Through Type Coupling |
| **Material** | Brass |
| **Finish** | Nickel Plated |
| **Connection Type** | Hose Barb |
| **Thread Size** | N/A |
| **Thread Standard** | N/A |
| **Thread Gender** | N/A |
| **Coupling Gender** | Male |
| **Threaded Connection** | N/A |
| **Seal material** | N/A |
| **Hose Barb Connection** | 13mm |

# Pneumatic Quick Connect Couplings

## Specifications

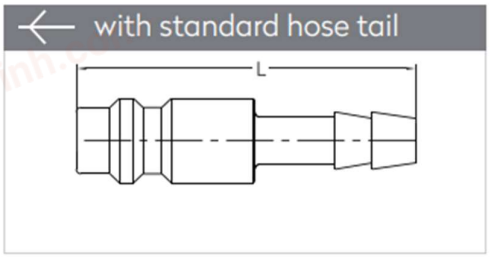


| Dimensions (mm) | | |
|---|---|---|
| SW | L | ØD |
| - | 48 | - |

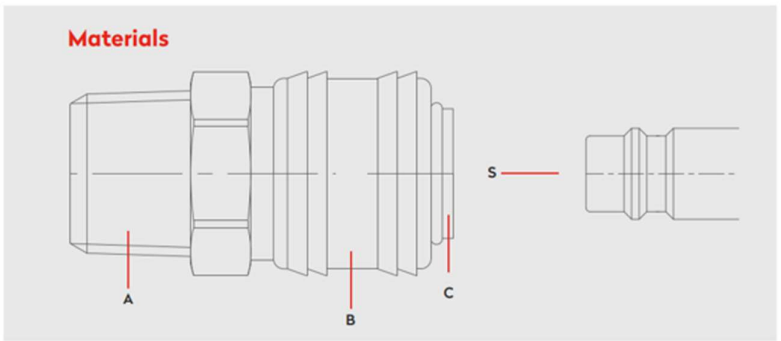


**Material Code**

A = Brass Nickel Plated

B = Brass Nickel Plated

C = Brass Nickel Plated

S = Brass Nickel Plated

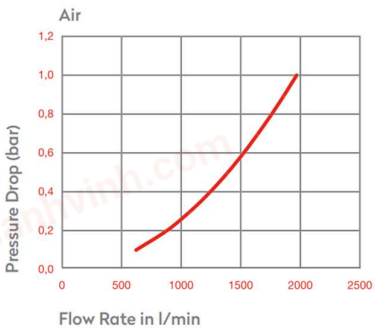


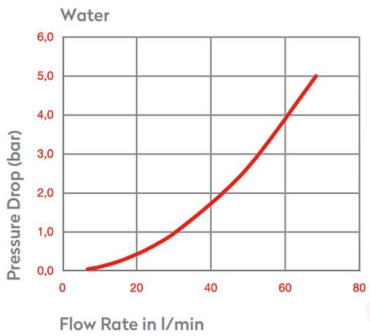


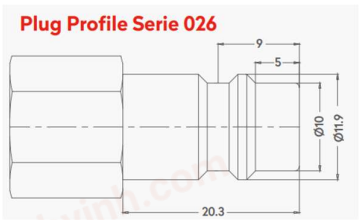


## Series 26 Quick Connect Couplings

| | | | | | |
|---|---|---|---|---|---|
| | 0 - 35 bar<br>( 0-508 PSI ) | | -20° to + 100°C (NBR)<br>-4° to + 212°F | Shut Off Type | |
| | OM 262 - 00990<br>OM 200 - 00650 | FLOW | 1000 lt/min | DN | 7.2 mm |