
chanhvinh.com

FEATURES

- Fine-wire strand made of annealed copper wire
- Reel of 100 m with insulation wall thickness of 0.8 mm
- Three approvals making this Switchgear versatile Cable to be used in commercial and non-commercial applications
- The BS6231 has the maximum operating temperature of +90°C (105° for 15,000 hours)

RS PRO Single Core x 4.0sqmm (Class 5 PCW), HRPVC Insulated, 600/1000V, Tri-Rated

RS Stock No.: 811-1445

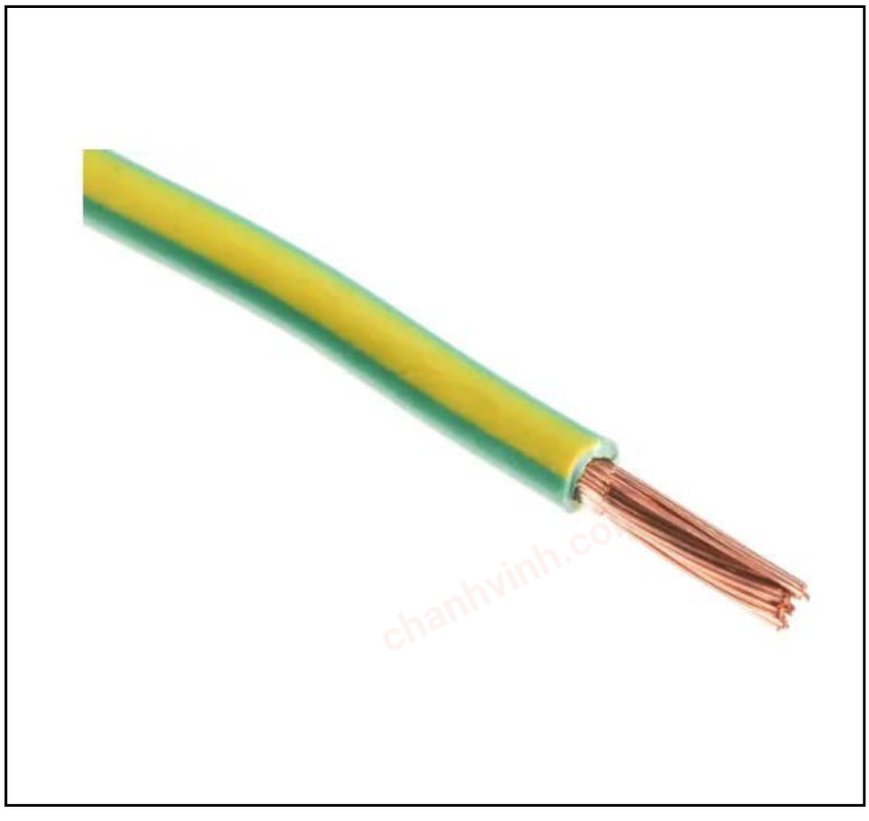

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

chanhvinh.com

Tri-rated Cable

Product Description

A plain copper stranded conductor covered with a PVC sheath. The advantage of using this type of cable is that it allows many different approvals to be met from a single cable type, thereby simplifying purchasing, stockholding, and production. Maximum Operating Temperature 90°C (105°C for 15,000 hours) to BS6231.

General Specifications

Type	Tri-rated
Tri-rated	Yes
Sheath Colour	Yellow/Green
Application	Electrical cabinets, Switch control in power switchgear, Relay and instrumentation panels of power switchgear, Internal connectors in rectifier equipment, Motor starters and controllers, Small electrical devices, Industrial electrical installations, Panel building

Electrical Specifications

Voltage Rating	600/1000V
Current Rating	41A
Conductor Material	52/0.295mm Plain Annealed Copper (Class 5 to IEC 60228)
Insulation Material	HRPVC (Type TI3 to BS EN 50363)
Conductor Resistance	4.95 Ω/km @ 20°C (Maximum)

Tri-rated Cable

Mechanical Specifications

Length	100m
Cross Sectional Area	4mm^2
Outer Diameter	4.3mm
American Wire Gauge	12
Core Strands	52/0.3mm
Size of Strands	0.3mm
Insulation Wall Thickness	0.8mm
Minimum Bend Radius	6 x Overall Diameter
Weight	49kg/km
Diameter Over Insulation	Lower Limit: 3.90mm; Upper Limit: 4.80mm

Operation Environment Specifications

Maximum Operating Temperature	90°C (105°C for 15,000 hours).
Maximum Conductor Temperature	105°C in air; 60°C in oil
Temperature Range	-15 to +105°C

Approvals

Compliance/Certifications	UL & CSA
Standards Met	UL 1015 & CSA Type TEW & BS 6231 Type CK



Tri-rated Cable

AWM Size	Area mm^2	Wire Type	UL Style	Nominal R/T (mm)	Nominal Diam (mm)	Current Rating (A)	Weight Kg/Km
22	0.5	16/0.2	1015	0.80	2.6	11	1
20	0.75	24/0.2	1015	0.80	2.8	14	14
18	1.0	32/0.2	1015	0.80	3.0	17	17
16	1.5	30/0.25	1015	0.80	3.3	21	22
14	2.5	50/0.25	1015	0.80	3.7	30	33
12	4.0	56/0.3	1015	0.80	4.3	41	49
10	6.0	84/0.3	1015	0.80	5.1	53	71
8	10	80/0.4	1028	1.20	6.8	75	124
6	16	126/0.4	1283	1.58	9.2	100	199
4	25	196/0.4	1283	1.58	10.6	136	290
2	35	276/0.4	1283	1.58	11.6	167	387
1	50	396/0.4	1284	2.10	14.4	190	570
2/0	70	360/0.5	1284	2.10	16.5	240	781
3/0	95	475/0.5	1284	2.10	18.7	300	1025
4/0	120	608/0.5	1284	2.10	20.0	340	1280