chanhvinh.com



## FEATURES

- Silver plated copper conductor
- PTFE Insulation to BS3G 210
- Various wire sizes and strands
- Multiple colours, including orange, blue, white and red

# RS PRO PTFE Equipment Wire 0.12 mm² CSA, Red 100m Reel

RS Stock No.: 841-7188



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

# Harsh Environment Wire

## Product Description

Brought to you by RS PRO, a range of wire and cables which excel within harsh environments. In areas where contamination causes an issue, such as oils, acids or excessive sunlight, these cables are specifically designed to be used within those areas. Highlighted by their copper conductor, these cables are suitable for various applications. All models are highly reliable and excellent quality

## General Specifications

| | |
|---|---|
| **Type** | A |
| **Wire Style** | BS3G210 |
| **American Wire Gauge** | 26 |
| **Insulation Material** | PTFE |
| **Resistant To** | Fuels, Gasoline, Hydraulic Fluid, Lubricants, Oils |
| **Core Strands** | 7/0.15mm |
| **Conductor Material** | Silver Plated Copper |
| **Number of Strands** | 7 |
| **Applications** | Construction sites, Car engines, Aeroplanes, Petrol stations |

## Electrical Specifications

| | |
|---|---|
| **Voltage Rating** | 300V |
| **Current Rating** | 4A |
| **Conductor resistance** | 159 Ω /km |

# Harsh Environment Wire

## Mechanical Specifications

| | |
|---|---|
| **Cross Sectional Area** | 0.124mm^2 |
| **Sheath Colour** | Red |
| **Length** | 100m |
| **Max Outer Diameter** | 0.80mm |
| **Insulation Wall Thickness** | 0.15mm |
| **Size of Strands** | 0.15mm |
| **Stranding** | 7/0.15mm |
| **weight** | 1.96kg/km |

## Operation Environment Specifications

| | |
|---|---|
| **Minimum Operating Temperature** | -75°C |
| **Maximum Operating Temperature** | 200°C |
| **Operating Temperature Range** | -75°C to 200°C |


## Approvals

| | |
|---|---|
| **Compliance/Certifications** | CSA , RoHS Certificate Of Compliance |
| **Standards Met** | BS 3G 210:1996 |

chanhvinh.com

# Harsh Environment Wire



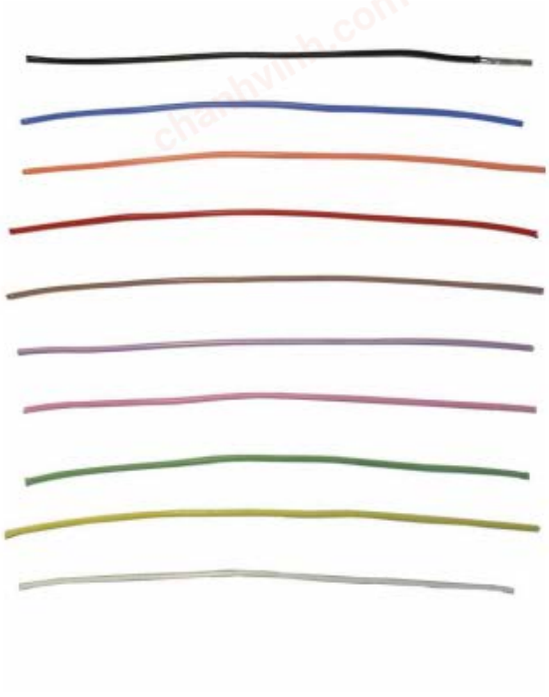

8417166 8417181

8417190

8417210

8417178 8417188

8417207

8417201

8417175 8417184

8417194

8417204

8417172 8417197

chanhvinh.com

# Harsh Environment Wire

**Product Range:**

| RS Code | Description |
|---|---|
| 8417178 | PTFE A 7/0.15 red 25m |
| 841 7166 | PTFE A 7/0.15 black 25m |
| 8417175 | PTFE A 7/0.15 pink 25m |
| 8417181 | PTFE A 7/0.15 black 100m |
| 8417184 | PTFE A 7/0.15 pink 100m |
| 8417172 | PTFE A 7/0.15 white 25m |
| 8417190 | PTFE A 7/0.15 blue 100m |
| 8417188 | PTFE A 7/0.15 red 100m |
| 8417197 | PTFE A 7/0.15 white 100m |
| 8417194 | PTFE A 7/0.15 green 100m |
| 8417204 | PTFE A 7/0.15 yellow 100m |
| 8417207 | PTFE A 7/0.15 brown 100m |
| 8417210 | PTFE A 7/0.15 orange 100m |
| 8417201 | PTFE A 7/0.15 violet 100m |