chanhvinh.com

samtec



(1,27 mm) .050"

SHF, ESHF, EHF, ECF SERIES

SHROUDED & EJECTOR IDC HEADER

SHF, ESHF Mates with:
FFSD, FFTP (SHF)

EHF Mates with:
FFSD*, FFTP

SPECIFICATIONS

For complete specifications see www.samtec.com?SHF, www.samtec.com?ESHF or www.samtec.com?EHF

Insulator Material:
Black Liquid Crystal Polymer
Terminal Material:
Phosphor Bronze
Plating:
Sn or Au over
50µ" (1,27 µm) Ni
Operating Temp Range:
-55°C to +125°C
RoHS Compliant:
Yes

Processing:

Lead–Free Solderable:
Yes
SMT Lead Coplanarity:
(0,10 mm) .004" max

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality


FILE NO. E111594

ALSO AVAILABLE
(MOQ Required)

- Other sizes

Contact Samtec.

EJECTOR HEADER CAP
(Locks FFSD cable to EHF header)



ECF – NO. PINS PER ROW

05, 08, 10, 13, 17, 20, 25

***Important Note:**
EHF will not mate to FFSD with strain relief (-SR option), see ESHF series.

Note: Some lengths, styles and options are non-standard, non-returnable.

TYPE STRIP – 1 | NO. PINS PER ROW – 01 | PLATING OPTION – D | TAIL STYLE | OTHER OPTION

SHF
= Mates with FFSD without Strain Relief

ESHF
= Mates with FFSD with Strain Relief

04, 05, 06, 08, 10, 11, 12, 13, 15, 17, 20, 25
(Standard sizes)

–L
= 10µ" (0,25 µm) Gold on post, Matte Tin on tail

–TH
= Through-hole


–RA
= Right Angle

–SM
= Surface Mount

–LC
= Locking Clip (Not available with –RA) (Manual placement required)

–TR
= Tape & Reel Packaging

–K
= (6,50 mm) .256" DIA Polyimide Film Pick & Place Pad (–SM only)

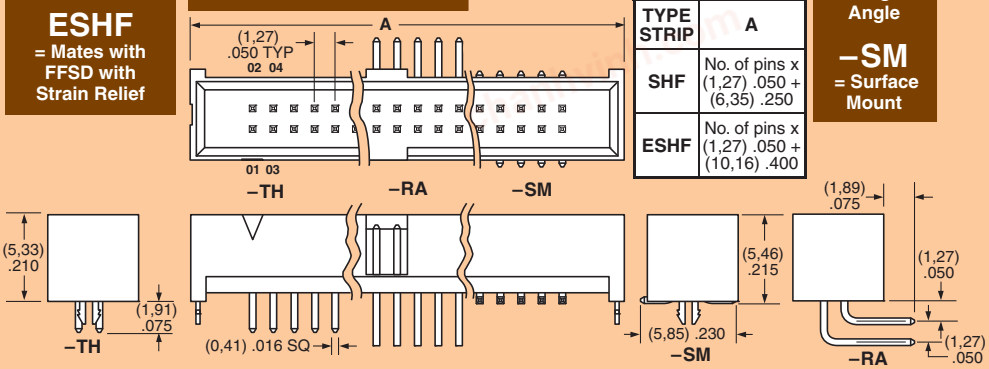

TYPE STRIP	A
SHF	No. of pins x (1,27) .050 + (6,35) .250
ESHF	No. of pins x (1,27) .050 + (10,16) .400

EHF – 1 | NO. PINS PER ROW – 01 | PLATING OPTION – D | TAIL OPTION | OTHER OPTION

04, 05, 08, 10, 13, 17, 20, 25
(Standard sizes)

–F
= Gold flash on post, Matte Tin on tail

–L
= 10µ" (0,25 µm) Gold on post, Matte Tin on tail

Leave blank for Through-Hole version

–SM
= Surface Mount

–RA
= Right Angle


–"XX"
= Polarized Position (–RA not available)

–LC
= Locking Clip (–SM only) (Manual placement required)

–K
= (7,50 mm) .295" DIA Polyimide Film Pick & Place Pad

–P
= Pick & Place Pad (–SM only)

–TR
= Tape & Reel Packaging (–LC not available)

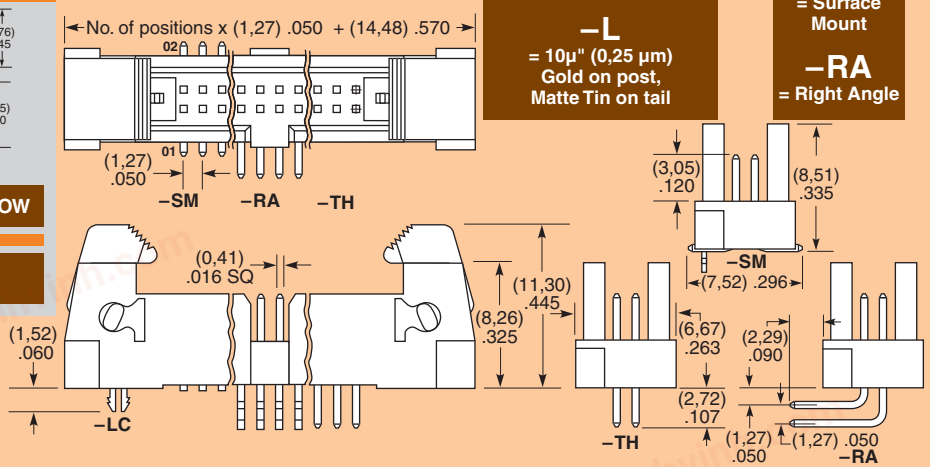

Due to technical progress, all designs, specifications and components are subject to change without notice.

SAMTEC USA • Tel: +1-800-SAMTEC-9 or +1-812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: +1-408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: +1-800-726-8329
SAMTEC SOUTH AMERICA • Tel: +55 31 3786 3227 SAMTEC UNITED KINGDOM • Tel: +44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: +33 1 60 95 06 60 SAMTEC ITALY • Tel: +39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46 8 4477280 SAMTEC BENELUX • Tel: +44 01236 739292
SAMTEC ISRAEL • Tel: +972 3 7526600 SAMTEC INDIA • Tel: +91 80 3272 1612 SAMTEC ANZ • Tel: +613 9580 0683 SAMTEC SINGAPORE • Tel: +65 6745 5955 SAMTEC JAPAN • Tel: +81 45 475 1385
SAMTEC SHANGHAI • Tel: +86 21 6083 3766 SAMTEC SHENZHEN • Tel: +86 755 83776780 SAMTEC TAIWAN • Tel: +886 2 2735 6109 SAMTEC HONG KONG • Tel: +852 26904858 SAMTEC KOREA • Tel: +82 31 717 5685