chanhvinh.com

Product datasheet

Specifications



synchronous motor - BMP - 480 VAC - 0.55 kW - IP65 - IEC

BMP0702F3NA2A

EAN Code: 3606480564406

Main

Product or component type	Synchronous motor
Device short name	BMP
Maximum mechanical speed	3600 rpm
Nominal output power	550 W with drive ATV32 at 0.55 kW 400 V three phase 550 W with drive ATV320 at 0.55 kW 400 V three phase
Nominal torque	1.75 N.m with drive ATV32 at 0.55 kW 400 V three phase 1.75 N.m with drive ATV320 at 0.55 kW 400 V three phase
Nominal speed	3000 rpm with drive ATV32 at 0.55 kW 400 V three phase 3000 rpm with drive ATV320 at 0.55 kW 400 V three phase
Product compatibility	Variable speed drive ATV32 at 0.55 kW 400 V three phase Variable speed drive ATV320 at 0.55 kW 380...500 V three phase
Shaft end	Keyed
IP degree of protection	IP65 standard IP67 with IP67 kit
Holding brake	Without
Mounting support	International standard flange
Electrical connection	Rotatable right-angled connector

Complementary

Range compatibility	Altivar Machine ATV320 Altivar 32
[Us] rated supply voltage	480 V
Network number of phases	Three phase
Maximum current Irms	2.9 A with drive ATV32 at 0.55 kW 400 V three phase 2.9 A with drive ATV320 at 0.55 kW 400 V three phase
Nominal operating frequency	250 Hz with drive ATV32 at 0.55 kW 400 V three phase 250 Hz with drive ATV320 at 0.55 kW 400 V three phase
Minimum operating frequency	25 Hz with drive ATV32 at 0.55 kW 400 V three phase 25 Hz with drive ATV320 at 0.55 kW 400 V three phase
Maximum operating frequency	300 Hz with drive ATV32 at 0.55 kW 400 V three phase 300 Hz with drive ATV320 at 0.55 kW 400 V three phase
Shaft diameter	11 mm
Shaft length	23 mm
key width	4 mm
Motor flange size	70 mm
Torque constant	1.51 N.m/A at 40 °C

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

chanhvinh.com

Number of motor poles	5
Number of motor stacks	2
Rotor inertia	1.13 kg.cm²
Stator resistance	6.96 Ohm at 40 °C
Stator inductance	20.7 mH for q-axis winding at 40 °C 20.7 mH for d-axis winding at 40 °C
Maximum radial force Fr	710 N at 1000 rpm 560 N at 2000 rpm 490 N at 3000 rpm 450 N at 4000 rpm
Maximum axial force Fa	0.2 x Fr
type of cooling	Natural convection
Length	154 mm
Centring collar diameter	60 mm
centring collar depth	2.5 mm
Number of mounting holes	4
Mounting holes diameter	5.5 mm
Circle diameter of the mounting holes	75…82 mm
Net weight	1.8 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11.000 cm
Package 1 Width	19.000 cm
Package 1 Length	39.500 cm
Package 1 Weight	2.783 kg
Unit Type of Package 2	S04
Number of Units in Package 2	3
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	8.986 kg
Unit Type of Package 3	P06
Number of Units in Package 3	12
Package 3 Height	75.000 cm
Package 3 Width	80.000 cm
Package 3 Length	60.000 cm
Package 3 Weight	43.944 kg

Logistical informations

Country of origin	DE

chanhvinh.com

Contractual warranty

Warranty	18 months

chanhvinh.com

chanhvinh.com

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	011fd9f0-94c4-44f0-a356-8c78f14f682f
REACh Regulation	REACh Declaration
PVC free	Yes

Use Again

Repack and remanufacture


Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

chanhvinh.com


Product datasheet BMP0702F3NA2A

Dimensions Drawings


Dimensions

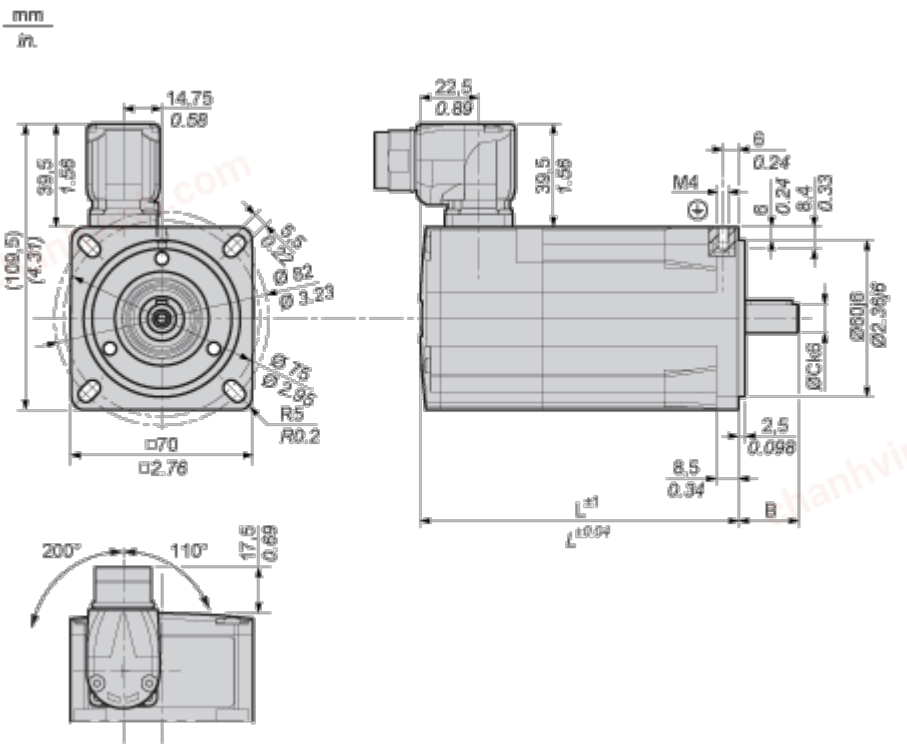

Parallel Key According to DIN 6885 A

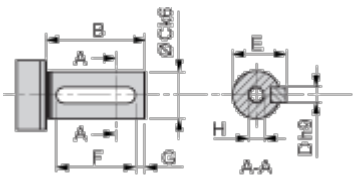

Female Thread of Shaft According to DIN 332-D



L	mm	154
	in.	6.06
B	mm	23
	in.	0.90
C	mm	11

chanhvinh.com

Product datasheet BMP0702F3NA2A


	in.	0.43
D	mm	4
	in.	0.16
E	mm	12.5
	in.	0.49
F	mm	18
	in.	0.71
G	mm	2.5
	in.	0.10
H		M4
N	mm	2.1
	in.	0.08
O	mm	3.2
	in.	0.12
P	mm	10
	in.	0.39
Q	mm	14
	in.	0.55
S	mm	4.3
	in.	0.17
T	mm	3.3
	in.	0.13

chanhvinh.com

Product datasheet BMP0702F3NA2A

Performance Curves

Performance curves

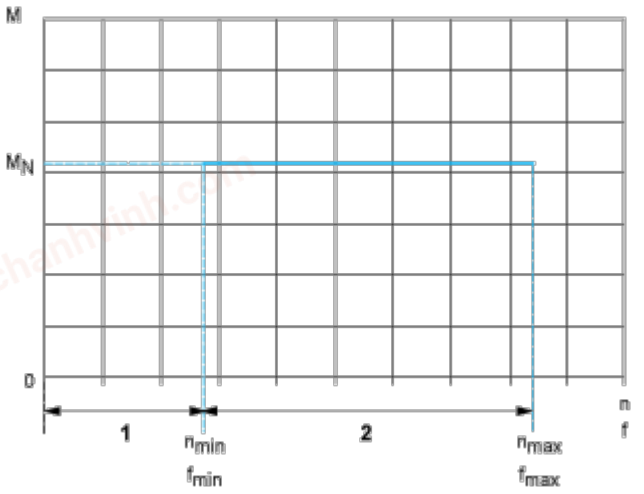

M : Torque in Nm

n : Speed in rpm

f : frequency in Hz

1 : Only permissible during acceleration and deceleration phases.

2 : Continuous operation with the default values from the configuration file.

chanhvinh.com