
chanhvinh.com

# Product data sheet
## Characteristics

# LVS04486
## Connection for vertical fixed NS, 4P 1250A, on Linergy LGY

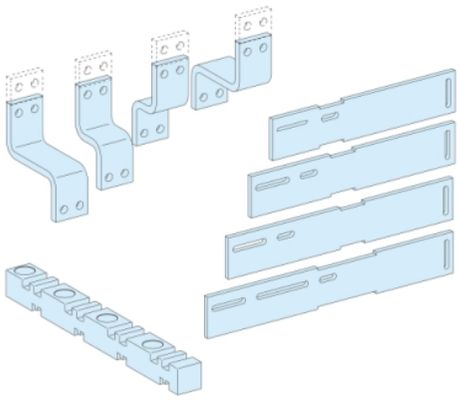

## Main

| | |
|---|---|
| Range | PrismaSeT |
| Range of product | PrismaSeT P |
| Product or component type | Connection |
| Product name | PrismaSeT PrismaSeT P enclosure |
| Accessory / separate part category | Current distribution accessory |
| Standards | IEC 61439-2, inside enclosure<br>IEC 61439-1, inside enclosure |
| Product certifications | ASTA |

## Complementary

| | |
|---|---|
| Cubicle-device connection | Linergy busbar |
| Poles description | 4P |
| Installation description | Cubicle - width 650 mm |
| Cubicle depth | 400 mm: front<br>400 + 400 mm: rear |
| Installed device | ComPact: fixed NS630b...1000 - control: toggle vertical installation<br>ComPact: fixed NS1250 - control: toggle vertical installation<br>ComPact: fixed NS630b...1000 - control: direct front rotary handle vertical installation<br>ComPact: fixed NS1250 - control: direct front rotary handle vertical installation<br>ComPact: fixed NS630b...1000 - control: motor mechanism vertical installation<br>ComPact: fixed NS1250 - control: motor mechanism vertical installation |
| [Ie] rated operational current | 1250 A |
| Busbar cross section | 80 x 10 mm |
| Height | 150 mm |
| Width | 550 mm |
| Depth | 300 mm |
| Net weight | 8.74 kg |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

chanhvinh.com

| | |
|---|---|
| Quantity per set | Set of 1 |
| Functional unit | 650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed toggle vertical 4P 1 front connection on Canalis 17<br>650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed direct front rotary handle vertical 4P 1 front connection on Canalis 17<br>650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed toggle vertical 4P 1 rear connection on Canalis 16<br>650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed direct front rotary handle vertical 4P 1 rear connection on Canalis 16<br>650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 4P 1 front connection on Canalis 17<br>650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 4P 1 rear connection on Canalis 16<br>650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed toggle vertical 4P 1 front connection on Canalis 17<br>650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed direct front rotary handle vertical 4P 1 front connection on Canalis 17<br>650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed toggle vertical 4P 1 rear connection on Canalis 16<br>650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed direct front rotary handle vertical 4P 1 rear connection on Canalis 16<br>650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 4P 1 front connection on Canalis 17<br>650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 4P 1 rear connection on Canalis 16<br>650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed toggle vertical 4P 1 front connection on adaptor 14<br>650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed direct front rotary handle vertical 4P 1 front connection on adaptor 14<br>650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 4P 1 front connection on adaptor 14<br>650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed toggle vertical 4P 1 front connection on adaptor 12<br>650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed direct front rotary handle vertical 4P 1 front connection on adaptor 12<br>650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 4P 1 front connection on adaptor 12 |

## Offer Sustainability

| | |
|---|---|
| Sustainable offer status | Green Premium product |
| REACh Regulation | REACh Declaration |
| REACh free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| Circularity Profile | No need of specific recycling operations |
| PVC free | Yes |
| Halogen content performance | Halogen free plastic parts product |