chanhvinh.com

Product datasheet

Specifications



pilot light Ø8 - IP40 - red - protruding LED included - 24V - faston

Local distributor code:

385366401 XVLA134

EAN Code: 3389110651089

Main

Range of product	Harmony XVL
Product or component type	LED pilot light with black bezel
Component name	XVL
Mounting diameter	8 mm
Light source	Protruding LED
Light block colour	Red
Protection type	Built-in by diode Integral ballast resistor
[Us] rated supply voltage	24 V
IP degree of protection	IP40 conforming to IEC 60529 IP40 conforming to NF C 20-010

Complementary

Supply circuit type	DC
Connections - terminals	Tag for Faston connectors: 2.8 x 0.5 mm Tag for soldering connectors
Current consumption	18 mA
[Ui] rated insulation voltage	50 V conforming to IEC 60947-1
Bulb lifespan	100000 h
Nominal voltage limit	0.8...1.1 Un
Terminals description ISO n°1	(X1-X2)PL
Height	12 mm
Width	12 mm
Depth	34 mm
Net weight	0.003 kg

Environment

Product certifications	UL CSA
Protective treatment	TC
Ambient air temperature for operation	-25…70 °C
Ambient air temperature for storage	-40…70 °C
Overvoltage category	Class 3 conforming to IEC 60536 Class 3 conforming to NF C 20-030

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

chanhvinh.com

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.2 cm
Package 1 Width	1.2 cm
Package 1 Length	4.2 cm
Package 1 Weight	3 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	3 cm
Package 2 Width	11 cm
Package 2 Length	11 cm
Package 2 Weight	31 g
Unit Type of Package 3	S01
Number of Units in Package 3	100
Package 3 Height	15 cm
Package 3 Width	15 cm
Package 3 Length	40 cm
Package 3 Weight	509 g

Logistical informations

Country of origin	ES

Contractual warranty

Warranty	18 months

chanhvinh.com

chanhvinh.com

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	1
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)

Use Again

Repack and remanufacture

End of life manual availability	End of Life Information
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


chanhvinh.com

Product datasheet XVLA134

Dimensions Drawings

LED Pilot Light

Dimensions



(1) Tags for Faston connectors or soldered connections

e panel thickness: 1 to 8 mm/0.03 to 0.31 in.

C		Ø	
mm	in.	mm	in.
32	1.26	12	0.47


chanhvinh.com

Product datasheet XVLA134

Mounting and Clearance

LED Pilot Light

Panel Drilling



Ø min		G min		H min	
mm	in.	mm	in.	mm	in.
8.2	0.32	12.5	0.49	12.5	0.49


chanhvinh.com

chanhvinh.com

Product datasheet XVLA134

Technical Illustration

Dimensions

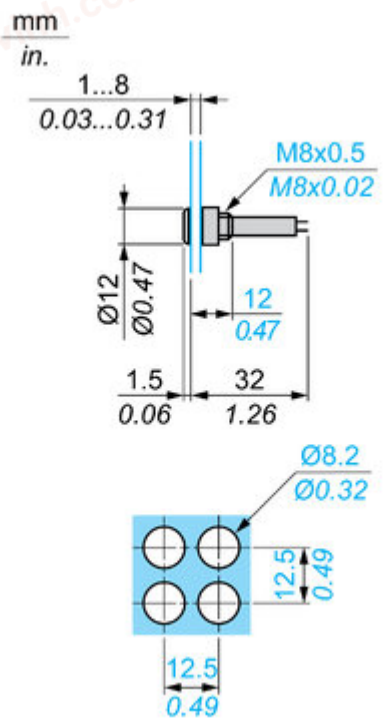

chanhvinh.com

Product datasheet XVLA134

Image of product in real life situation



chanhvinh.com