chanhvinh.com

COLD PROTECTION


SHOWA 477

FULLY COATED NITRILE, NITRILE FOAM PALM AND INSULATED LINER

A durable double-dipped nitrile coated glove with an insulated liner. The foam nitrile provides excellent grip and the flat nitrile base provides oil resistance. Ideal for oil submersion tasks and the secure handling of wet and oily components in inclement weather.

FEATURES

- Full double-engineered nitrile coatings protect against oils and ingress of liquids
- Fixed acrylic terry liner insulates and remains in place when removing the hand
- Highly flexible and resistant to abrasion and ripping
- Nitrile foam palm coating provides long lasting grip performance in wet and oily conditions
- Wrist protection
- Manufactured using an ergonomically designed hand mould that replicates the natural curvature of the human hand - reduces hand fatigue and increases productivity
- Seamless for optimum comfort

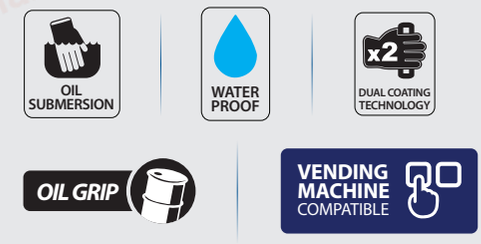



SUITABLE FOR

Typical Industries

- Construction
- Marine
- Oil and Gas
- Ports
- Retail
- Transport and Logistics
- Utilities

Suitable Applications

- Cold Storage
- Concreting
- Handling Oily Components in Inclement Conditions
- Public Works
- Refrigerated Vehicles
- Ship Maintenance

CERTIFICATION

CAT II

CE

EN 388:2016

4231X

EN511:2006

011

See overleaf for explanation

Globus GROUP

chanhvinh.com

COLD PROTECTION

SHOWA 477

PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge polyester, nylon, acrylic
	COATING:	Foam nitrile over nitrile
COLOUR	White/blue and black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE

- USE: Cold resistant glove. Not suitable for thermal (heat), electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- STORAGE : Store in dry conditions in the original packaging and away from direct sunlight
- CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/M 8/L 9/XL 10/XXL	SHO4772 SHO4773 SHO4774 SHO4775	5 pairs per bag 60 pairs per case

CERTIFICATION LEGENDS

MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

0-4 0-5 0-4 0-4 A-F P

- 0-4: Abrasion Resistance
- 0-5: Circular Blade Cut Resistance
- 0-4: Tear Resistance
- 0-4: Puncture Resistance
- A-F: Straight Blade Cut Resistance (EN ISO: 13997)
- P: Impact Resistance

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

COLD HAZARDS
EN 511

PERFORMANCE LEVELS
0-4 0-5 0 or 1

- 0-4: Convective Cold Resistance
- 0-5: Contact Cold Resistance
- 0 or 1: Water Permeability

EUROPE
www.globusgroup.com
E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA
www.globusgroup.com/gcc
E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SHO-DATA-477_0620_1

EU compliance certificate delivered by the notified body SGS Fimko Oy, Särkiniementie 3, Helsinki, 00211, Finland (Notified Body number 0598)
The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.