
chanhvinh.com

Product data sheet

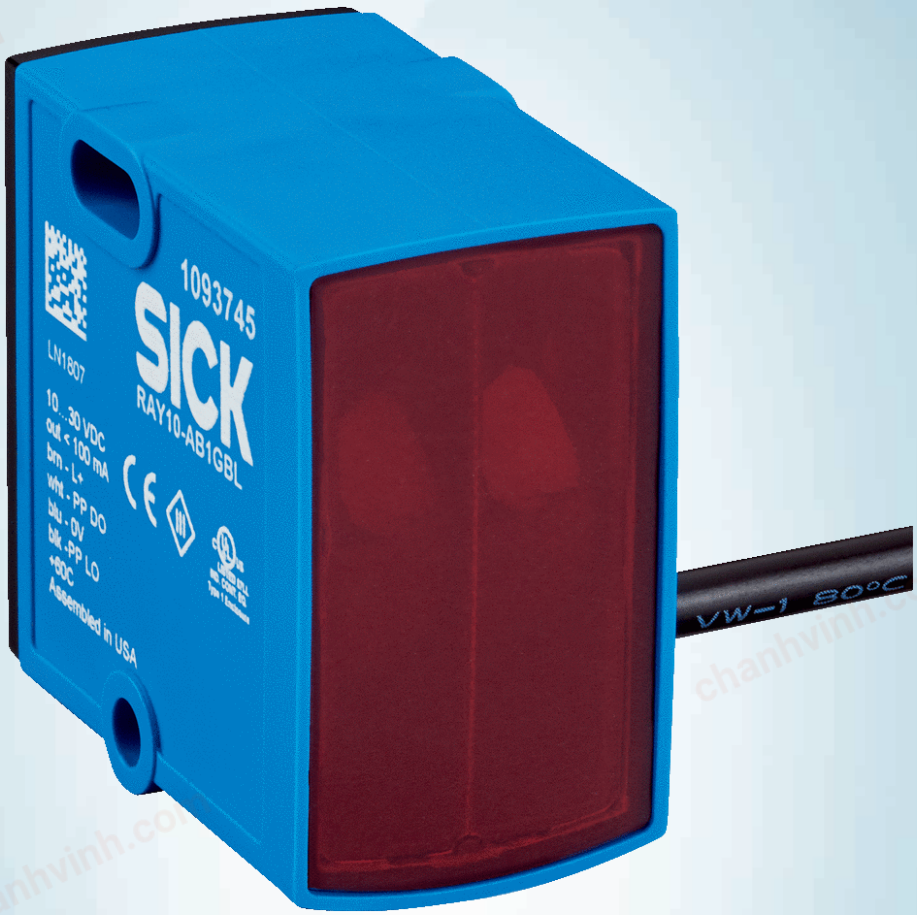

RAY10-AB5CBLA00

RAY10 Reflex Array

MULTITASK PHOTOELECTRIC SENSORS

SICK
Sensor Intelligence.

chanhvinh.com

RAY10-AB5CBLA00 | RAY10 Reflex Array

MULTITASK PHOTOELECTRIC SENSORS



Illustration may differ

Ordering information

Type	Part no.
RAY10-AB5CBLA00	1096102

Other models and accessories ➜ www.sick.com/RAY10_Reflex_Array

Detailed technical data

Features

Functional principle	Photoelectric retro-reflective sensor
Functional principle detail	Dual lens, Reflex Array
Dimensions (W x H x D)	21.5 mm x 36 mm x 37.7 mm
Housing design (light emission)	Rectangular
Minimum object size	5 mm, position-independent detection within the light array
Detection height	25 mm
Sensing range max.	0 m ... 1.5 m [1]
Distance of the sensor to reflector	0.3 m ... 1.5 m [1]
Type of light	Visible red light
Light source	PinPoint LED [2]
Light spot size (distance)	37 mm x 12 mm (1 m)
Wave length	635 nm
Adjustment	Potentiometer IO-Link
Pin 2 configuration	External Input (test), Teach-in, switching signal
Special applications	Detecting transparent objects, Detecting perforated objects, Detecting uneven, shiny objects, Detecting objects with position tolerances, Detecting flat objects

[1] Reflector P250F.

[2] Average service life: 100,000 h at T_U = +25 °C.

chanhvinh.com

Mechanics/electronics

Supply voltage U_B	10 V DC ... 30 V DC [1]
Ripple	< 5 V_{pp}
Current consumption	30 mA [2]
Switching output	Push-pull: PNP/NPN [3]
Output: Q_{L1} / C	Switching output or IO-Link mode
Output function	Factory setting: Pin 2 / white (MF): NPN normally closed (light switching), PNP normally open (dark switching), Pin 4 / black (QL1 / C): NPN normally open (dark switching), PNP normally closed (light switching), IO-Link
Switching mode	Light/dark switching
Switching mode selector	Via IO-Link
Signal voltage PNP HIGH/LOW	Approx. V_S – 2.5 V / 0 V
Signal voltage NPN HIGH/LOW	Approx. VS / < 2.5 V
Output current $I_{max.}$	≤ 100 mA
Response time	≤ 0.5 ms [4]
Switching frequency	1,000 Hz [5]
Connection type	Cable with male connector M8, 4-pin, snap, 300 mm [6]
Cable material	PVC
Conductor cross section	0.13 mm²
Cable diameter	Ø 3.6 mm
Circuit protection	A [7] B [8] C [9] D [10]
Protection class	III
Weight	130 g
Housing material	Plastic, ABS
Optics material	Plastic, PMMA
Enclosure rating	IP67
Ambient operating temperature	–40 °C ... +60 °C [11]
Ambient temperature, storage	–40 °C ... +70 °C
UL File No.	NRKH.E189383 & NRKH7.E189383

[1] Limit values.
[2] Without load.
[3] Pin 4 and Pin 2: this switching output must not be connected to any other output.
[4] Signal transit time with resistive load in switching mode. Different values possible in COM2 mode.
[5] With light/dark ratio 1:1 in switching mode. Different values possible in IO-Link mode.
[6] Do not bend below 0 °C.
[7] A = V_S connections reverse-polarity protected.
[8] B = inputs and output reverse-polarity protected.
[9] C = interference suppression.
[10] D = outputs overcurrent and short-circuit protected.
[11] Avoid condensation on the front screen of the sensor and on the reflector.

chanhvinh.com

RAY10-AB5CBLA00 | RAY10 Reflex Array

MULTITASK PHOTOELECTRIC SENSORS

Safety-related parameters

$MTTF_D$	634 years
DC_{avg}	0 %
T_M (mission time)	20 years

Communication interface

Communication interface	IO-Link V1.1
Communication Interface detail	COM2 (38,4 kBaud)
Cycle time	2.3 ms
Process data length	16 Bit
Process data structure	Bit 0 = switching signal Q_{L1} Bit 1 = switching signal Q_{L2} Bit 2 ... 15 = empty
VendorID	26
DeviceID HEX	0x8001DD
DeviceID DEC	8389085

Smart Task

Smart Task name	Base logics
Logic function	Direct AND OR Window Hysteresis
Timer function	Deactivated On delay Off delay ON and OFF delay Impulse (one shot)
Inverter	Yes
Switching frequency	SIO Direct: 500 Hz [1] SIO Logic: 500 Hz [2] IOL: 217 Hz [3]
Response time	SIO Direct: 1 ms [1] SIO Logic: 1 ms [2] IOL: 2,3 ms [3]
Repeatability	SIO Direct: 1 ms [1] SIO Logic: 1 ms [2] IOL: 2,3 ms [3]
Switching signal	
Switching signal Q_{L1}	Switching output
Switching signal Q_{L2}	Switching output

[1] SIO Direct: sensor operation in standard I/O mode without IO-Link communication and without using internal sensor logic or time parameters (set to "direct"/"deactivated").

[2] SIO Logic: Sensor operation in standard I/O mode without IO-Link communication. Sensor-internal logic or timing parameters plus Automation Functions used.

[3] IOL: Sensor operation with full IO-Link communication and usage of logic, timing and Automation Function parameters.

Diagnosis

Device status	Yes
Quality of teach	Yes

chanhvinh.com


Quality of run	Yes, Contamination display

Classifications


ECLASS 5.0	27270902
ECLASS 5.1.4	27270902
ECLASS 6.0	27270902
ECLASS 6.2	27270902
ECLASS 7.0	27270902
ECLASS 8.0	27270902
ECLASS 8.1	27270902
ECLASS 9.0	27270902
ECLASS 10.0	27270902
ECLASS 11.0	27270902
ECLASS 12.0	27270902
ETIM 5.0	EC002717
ETIM 6.0	EC002717
ETIM 7.0	EC002717
ETIM 8.0	EC002717
UNSPSC 16.0901	39121528

Connection diagram

Cd-390




Light spot size

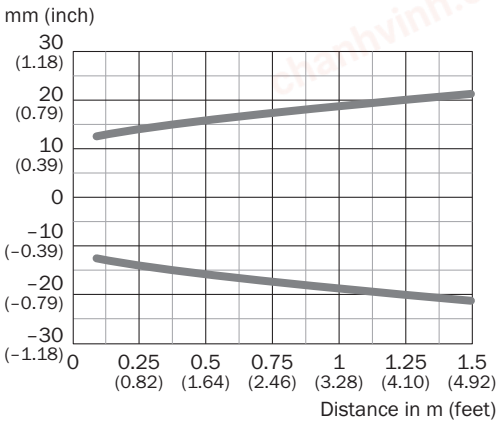

chanhvinh.com

Dimensional drawing (Dimensions in mm (inch))

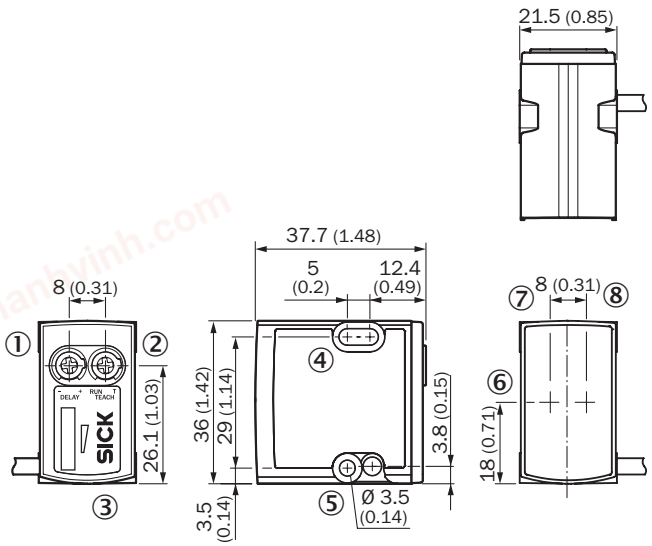

① Potentiometer / LED indicator green
② Potentiometer / LED indicator orange
③ BluePilot blue: signal strength light bar during teach process / AutoAdapt indicator during run
④ Mounting hole M3 (Ø 3.1 mm)
⑤ Mounting hole M3 (Ø 3.1 mm)
⑥ Optical axis
⑦ Optical axis
⑧ Optical axis

Recommended accessories

Other models and accessories ➜ www.sick.com/RAY10_Reflex_Array

	Brief description	Type	Part no.
Universal bar clamp systems			
	Plate N08 for universal clamp bracket, Zinc plated steel (sheet), Zinc die cast (clamping bracket), Universal clamp (5322626), mounting hardware	BEF-KHS-N08	2051607
Mounting brackets and plates			
	Universal mounting bracket for reflectors, steel, zinc coated	BEF-WN-REFX	2064574
Plug connectors and cables			
	Head A: female connector, M8, 4-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m	YF8U14-050VA3XLEAX	2095889
	Head A: male connector, M8, 4-pin, straight Cable: unshielded	STE-0804-G	6037323

chanhvinh.com

	Brief description	Type	Part no.
Reflectors			
	Fine triple reflector, screw connection, suitable for laser sensors, 52 mm x 62 mm, PMMA/ABS, Screw-on, 2 hole mounting	P250F	5308843

Recommended services

Additional services ➜ www.sick.com/RAY10_Reflex_Array

	Type	Part no.
Function Block Factory		
• **Description:** The Function Block Factory supports common programmable logic controllers (PLCs) from various manufacturers, such as Siemens, Beckhoff, Rockwell Automation and B&R. More information on the FBF can be found here. • **Note:** You can configure your function block at Function Block Factory. As a login please use your SICK ID.	Function Block Factory	On request

chanhvinh.com

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com

SICK
Sensor Intelligence.