chanhvinh.com

Product data sheet



WSU26/3-103A00

WSU/WEU26-3

SAFETY SINGLE-BEAM SENSORS

SICK
Sensor Intelligence.

chanhvinh.com

WSU26/3-103A00 | WSU/WEU26-3

SAFETY SINGLE-BEAM SENSORS



Ordering information

Scanning range	System part	Type	Part no.
70 m	Sender	WSU26/3-103A00	1047984

Other models and accessories → www.sick.com/WSU_WEU26-3

Detailed technical data

Features

Type of light	Infrared light
Scanning range	70 m
Dimension of the light path	0.5 m ... 70 m
Number of beams	1
Detection capability	30 mm
Front screen heating	✓
Synchronization	Optical synchronisation

Safety-related parameters

Type	Type 4 (IEC 61496-1)
Safety integrity level	SIL 3 (IEC 61508)
Category	Category 4 (EN ISO 13849)
Performance level	PL e (EN ISO 13849)
B_{10d} parameter	1 x 10^6 switching cycles (AC-15, 230 V, 0.4 A), 2.6 x 10^5 switching cycles (AC-15, 230 V, 2.0 A), 1 x 10^6 switching cycles (DC-13, 24 V, 0.6 A), 2 x 10^5 switching cycles (DC-13, 24 V, 1.5 A)
PFH_D (mean probability of a dangerous failure per hour)	4.0 x 10^{-9} (EN ISO 13849)
T_M (mission time)	20 years (EN ISO 13849)

Interfaces

Connection type	PG gland (13,5)
Display elements	LEDs

Electrical data

Protection class	I (EN 50178)
Supply voltage V_S	24 V DC (19.2 V DC ... 28.8 V DC)
Power consumption	≤ 6 W

[1] Upon applying the supply voltage.

chanhvinh.com

Switch-on time	≤ 10 s [1]
Test input	Volt-free N/C contact

[1] Upon applying the supply voltage.

Mechanical data

Design	Rectangular
Dimensions (W x H x D)	50 mm x 156 mm x 116 mm
Housing material	Aluminum die cast
Front screen material	Polycarbonate, scratch-resistant coating
Weight	≤ 1 kg

Ambient data

Enclosure rating	IP67 (EN 60529)
Ambient operating temperature	–25 °C ... +55 °C
Storage temperature	–25 °C ... +70 °C
Air humidity	15 % ... 95 %, Non-condensing
Vibration resistance	5 g, 10 Hz ... 55 Hz (IEC 60068-2-6)
Shock resistance	10 g, 16 ms (IEC 60068-2-29)

Other information


Type of light	Infrared light
Wave length	850 nm

Classifications

ECLASS 5.0	27272701
ECLASS 5.1.4	27272701
ECLASS 6.0	27272701
ECLASS 6.2	27272701
ECLASS 7.0	27272701
ECLASS 8.0	27272701
ECLASS 8.1	27272701
ECLASS 9.0	27272701
ECLASS 10.0	27272701
ECLASS 11.0	27272701
ECLASS 12.0	27272701
ETIM 5.0	EC001831
ETIM 6.0	EC001831
ETIM 7.0	EC001831
ETIM 8.0	EC001831
UNSPSC 16.0901	46171620

chanhvinh.com

Dimensional drawing (Dimensions in mm (inch))

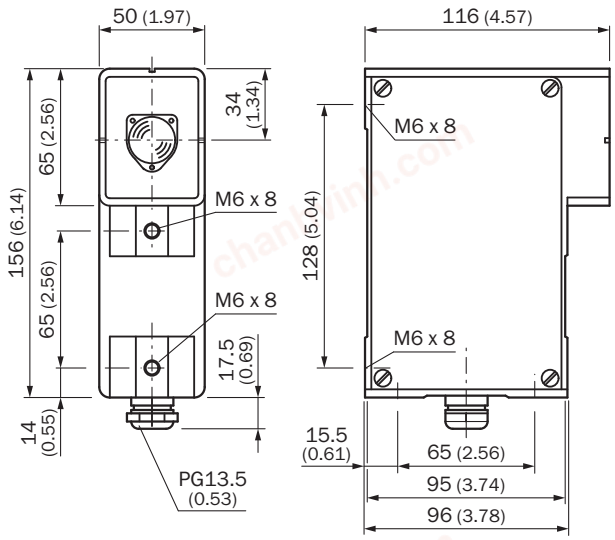

Recommended accessories

Other models and accessories ➜ www.sick.com/WSU_WEU26-3

	Brief description	Type	Part no.
Reduction and extension pieces			
	Adapter for cable entry from PG 13 to PG 21	PG extension for PG13 to PG21	5306052
Alignment aids			
 		AR60	1015741
 		AR60 adapter, WSU/WEU26	4031156
Deflector mirrors			
 		PNS75-008	1026647
 		PSK1	1005229
 		PSK45	5306053
Test and monitoring tools			
 		Test rod 30 mm	2022602

chanhvinh.com

	Brief description	Type	Part no.
Distributors			
	• **Description:** PG expansion with 2 cable entries PG21	Two-way splitter	5305978
Mounting brackets and plates			
		BEF-4WNAEFAL1	2007900
		BEF-4AAAAHST3	2012473

chanhvinh.com

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com