
chanhvinh.com

Product data sheet

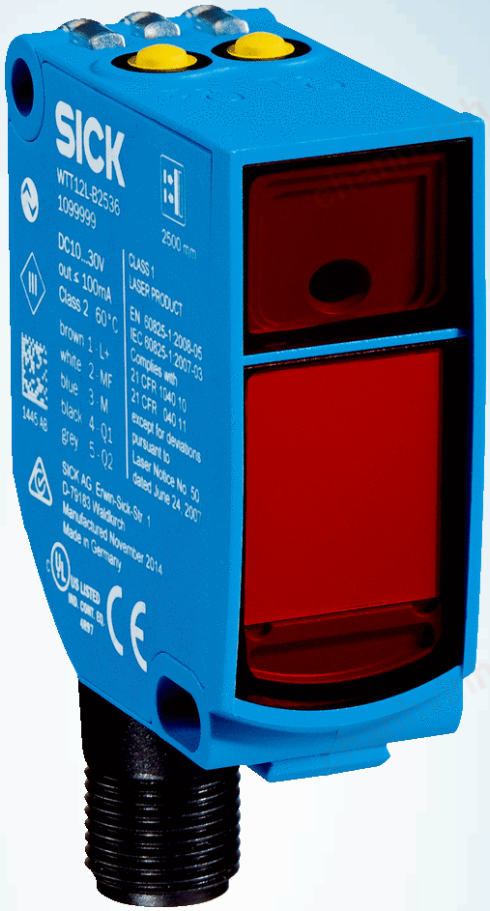

WTT12L-A2523

PowerProx

MULTITASK PHOTOELECTRIC SENSORS

SICK
Sensor Intelligence.

chanhvinh.com

WTT12L-A2523 | PowerProx

MULTITASK PHOTOELECTRIC SENSORS

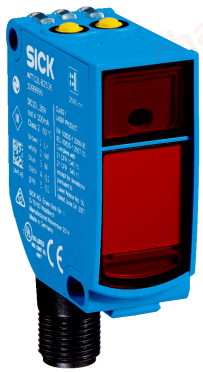


Illustration may differ

Ordering information

Type	Part no.
WTT12L-A2523	1082477

Other models and accessories → www.sick.com/PowerProx

Detailed technical data

Features

Functional principle	Photoelectric proximity sensor
Functional principle detail	Background suppression, Optical time-of-flight
Dimensions (W x H x D)	20 mm x 49.6 mm x 44.2 mm
Housing design (light emission)	Rectangular
Sensing range max.	50 mm ... 1,400 mm [1]
Sensing range	100 mm ... 1,400 mm [2] [3]
Distance value	
Measuring range	100 mm ... 1,400 mm [1]
Resolution	1 mm
Repeatability	1,1 mm ... 1,5 mm [4] [5] [6]
Accuracy	Typ. ± 20 mm, typ. ± 15 mm [7] [8]
Type of light	Visible red light
Light source	Laser [9]
Light spot size (distance)	Ø 10 mm (1,400 mm)
Wave length	658 nm
Laser class	1 (IEC 60825-1 / CDRH 21 CFR 1040.10 & 1040.11)

[1] Object with 6 ... 90% remission (based on standard white, DIN 5033).
[2] Adjustable.
[3] Object with 90% remission (based on standard white, DIN 5033).
[4] Equivalent to 1 σ.
[5] See characteristic curves repeatability.
[6] 6% ... 90% remission factor.
[7] 50 ... 1000 mm.
[8] 1000 ... 1400 mm.
[9] Average service life: 100,000 h at T_U = +25 °C.

chanhvinh.com

Adjustment	Single teach-in button (2 x)

[1] Object with 6 ... 90% remission (based on standard white, DIN 5033).
[2] Adjustable.
[3] Object with 90% remission (based on standard white, DIN 5033).
[4] Equivalent to 1 σ.
[5] See characteristic curves repeatability.
[6] 6% ... 90% remission factor.
[7] 50 ... 1000 mm.
[8] 1000 ... 1400 mm.
[9] Average service life: 100,000 h at T_U = +25 °C.

Mechanics/electronics

Supply voltage U_B	12 V DC ... 30 V DC [1] [2]
Ripple	< 5 V_{pp} [3]
Current consumption	70 mA [4]
Switching output	Push-pull: PNP/NPN [5]
Number of switching outputs	1 (Q_1) [5]
Switching mode	Light switching [5]
Output current $I_{max.}$	≤ 50 mA
Response time	≤ 16.7 ms [6]
Switching frequency	30 Hz [7]
Analog output	4 mA ... 20 mA (≤ 450 Ω) / 0 V ... 10 V (≥ 50 kΩ) / switchable
Resolution of analog output	12 bit
Output time	≤ 16.7 ms
Input	Sender off
Connection type	Male connector M12, 5-pin
Circuit protection	A [8] B [9] C [10]
Protection class	III
Weight	48 g
Housing material	Plastic, VISTAL®
Optics material	Plastic, PMMA
Enclosure rating	IP67

[1] Limit values. Operated in short-circuit protected network: max. 8 A.
[2] Vs min when using the voltage output = 13 V.
[3] May not exceed or fall below U_V tolerances.
[4] Without load. At V_S = 24 V.
[5] Q1 = 1 switching threshold, light switching.
[6] Signal transit time with resistive load.
[7] With light/dark ratio 1:1.
[8] A = V_S connections reverse-polarity protected.
[9] B = inputs and output reverse-polarity protected.
[10] C = interference suppression.
[11] For Vs ≤ 24 V. When Tu = 45 °C or above, a maximum load resistance of 300 Ω ... 450 Ω is permitted on QA.
[12] Below T_u = –10 °C a warm-up time is necessary.

chanhvinh.com

Ambient operating temperature	–35 °C ... +50 °C [11]
Ambient temperature, storage	–40 °C ... +70 °C
Warm-up time	< 15 min [12]
Initialization time	< 300 ms
UL File No.	NRKH.E181493

[1] Limit values. Operated in short-circuit protected network: max. 8 A.
[2] Vs min when using the voltage output = 13 V.
[3] May not exceed or fall below U_V tolerances.
[4] Without load. At V_S = 24 V.
[5] Q1 = 1 switching threshold, light switching.
[6] Signal transit time with resistive load.
[7] With light/dark ratio 1:1.
[8] A = V_S connections reverse-polarity protected.
[9] B = inputs and output reverse-polarity protected.
[10] C = interference suppression.
[11] For Vs ≤ 24 V. When Tu = 45 °C or above, a maximum load resistance of 300 Ω ... 450 Ω is permitted on QA.
[12] Below T_u = –10 °C a warm-up time is necessary.

Safety-related parameters


$MTTF_D$	124 years
DC_{avg}	0 %
T_M (mission time)	20 years

Classifications

eCl@ss 5.0	27270904
eCl@ss 5.1.4	27270904
eCl@ss 6.0	27270904
eCl@ss 6.2	27270904
eCl@ss 7.0	27270904
eCl@ss 8.0	27270904
eCl@ss 8.1	27270904
eCl@ss 9.0	27270904
eCl@ss 10.0	27270904
eCl@ss 11.0	27270904
eCl@ss 12.0	27270903
ETIM 5.0	EC002719
ETIM 6.0	EC002719
ETIM 7.0	EC002719
ETIM 8.0	EC002719
UNSPSC 16.0901	39121528

chanhvinh.com


Dimensional drawing (Dimensions in mm (inch))

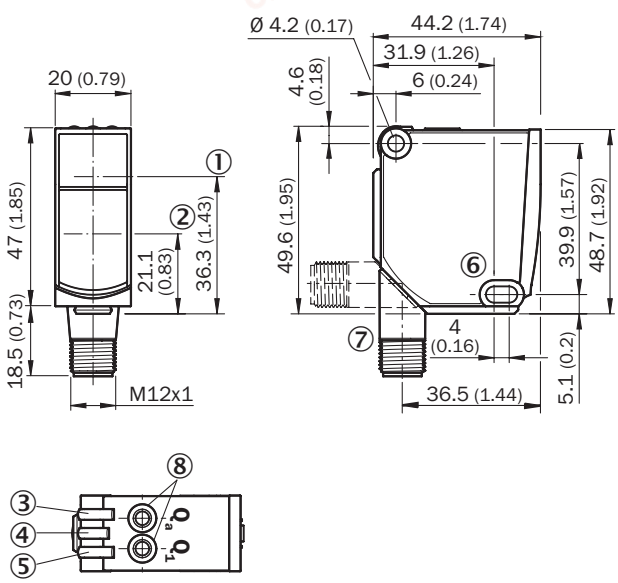


① Optical axis, sender
② Optical axis, receiver
③ LED indicator yellow: Status of analog output
④ LED indicator green: power on
⑤ Status indicator LED, yellow: Status switching output
⑥ Mounting hole, Ø 4.2 mm
⑦ Connection
⑧ Single teach-in button

Connection diagram

Cd-375




Characteristic curve

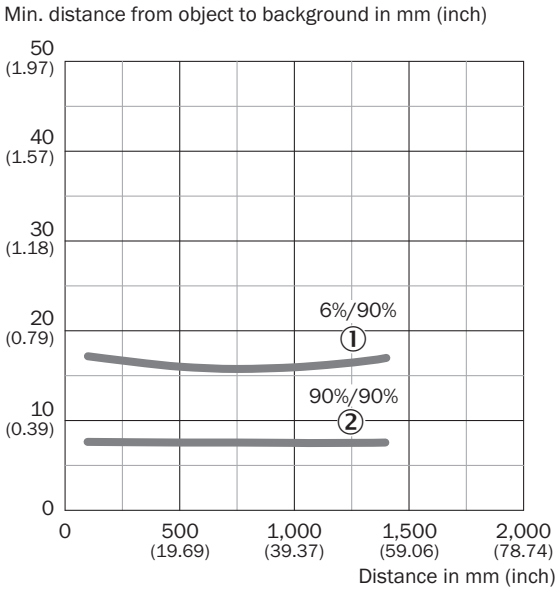

① Sensing range on black, 6% remission factor
② Sensing range on white, 90% remission factor


Light spot size

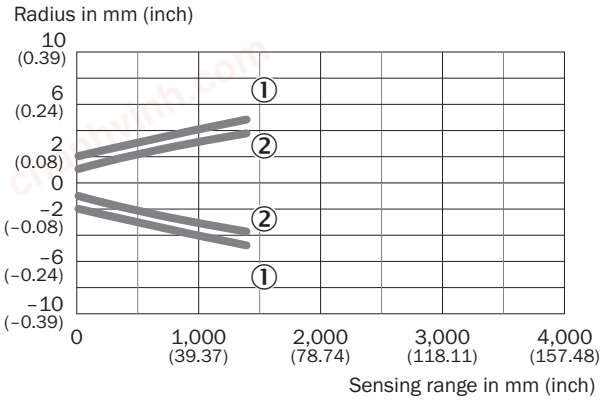

① Light spot horizontal
② Light spot vertical

chanhvinh.com


Repeatability

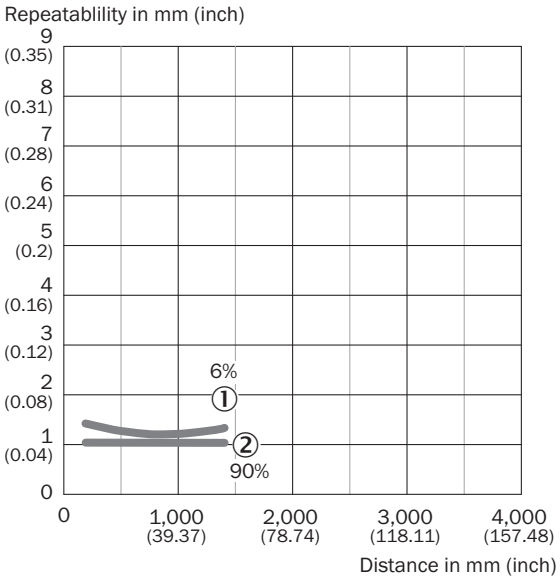

① 6 % remission, on black
② 90 % remission, on white

Recommended accessories

Other models and accessories ➜ www.sick.com/PowerProx

	Brief description	Type	Part no.
Mounting brackets and plates			
	Mounting brackets	BEF-WTT12L	2078538
Plug connectors and cables			
	Head A: female connector, M12, 5-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m	YF2A15-050VB5XLEAX	2096240
	Head A: male connector, M12, 5-pin, straight Cable: unshielded For field bus technology	STE-1205-G	6022083

chanhvinh.com

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com

SICK
Sensor Intelligence.