chanhvinh.com

Product data sheet



ZTB18-APZ4B1D02

Z18 Simple Sense

HYBRID PHOTOELECTRIC SENSORS

SICK
Sensor Intelligence.

chanhvinh.com

ZTB18-APZ4B1D02 | Z18 Simple Sense

HYBRID PHOTOELECTRIC SENSORS



Illustration may differ

Ordering information

Type	Part no.
ZTB18-APZ4B1D02	1100590

Included in delivery: BEF-MU-M18*1 (1)

Other models and accessories ➜ www.sick.com/Z18_Simple_Sense

Detailed technical data

Features

Functional principle	Photoelectric proximity sensor
Functional principle detail	Background suppression
Dimensions (W x H x D)	13.6 mm x 34.8 mm x 23 mm
Housing design (light emission)	Hybrid
Thread diameter (housing)	M18
Mounting system type	M18, head/side (24.1 ... 25.4 mm)
Housing color	Transparent
Sensing range max.	5 mm ... 50 mm [1]
Sensing range	5 mm ... 50 mm [1]
Type of light	Infrared light
Light source	PinPoint LED
Light spot size (distance)	Ø 8 mm (100 mm)
Wave length	850 nm

[1] Object with 90% remission (based on standard white, DIN 5033).

Mechanics/electronics

Supply voltage U_B	10 V DC ... 30 V DC
Ripple	< 10 %
Current consumption	≤ 15 mA [1]
Switching output	PNP
Switching mode	Light switching

[1] Without load.
[2] Signal transit time with resistive load.
[3] With light/dark ratio 1:1.
[4] A = V_S connections reverse-polarity protected.
[5] B = inputs and output reverse-polarity protected.
[6] D = outputs overcurrent and short-circuit protected.

chanhvinh.com

Switching output detail	
Switching output Q1	PNP, Light switching
Switching output Q2	Not connected
Output current $I_{max.}$	100 mA
Response time	≤ 1 ms [2]
Switching frequency	500 kHz [3]
Connection type	Cable with M12 male connector, 4-pin, 150 mm
Cable material	PVC
Conductor cross section	0.13 mm²
Circuit protection	A [4] B [5] D [6]
Protection class	III
Weight	3.63 g
Housing material	Plastic, ABS
Optics material	Plastic, PMMA
Enclosure rating	IP67
Ambient operating temperature	–40 °C ... +55 °C
Ambient temperature, storage	–40 °C ... +70 °C
UL File No.	E189383

[1] Without load.
[2] Signal transit time with resistive load.
[3] With light/dark ratio 1:1.
[4] A = V_S connections reverse-polarity protected.
[5] B = inputs and output reverse-polarity protected.
[6] D = outputs overcurrent and short-circuit protected.

Classifications

eCl@ss 5.0	27270904
eCl@ss 5.1.4	27270904
eCl@ss 6.0	27270904
eCl@ss 6.2	27270904
eCl@ss 7.0	27270904
eCl@ss 8.0	27270904
eCl@ss 8.1	27270904
eCl@ss 9.0	27270904
eCl@ss 10.0	27270904
eCl@ss 11.0	27270904
eCl@ss 12.0	27270903
ETIM 5.0	EC002719
ETIM 6.0	EC002719
ETIM 7.0	EC002719
ETIM 8.0	EC002719

chanhvinh.com

ZTB18-APZ4B1D02 | Z18 Simple Sense


HYBRID PHOTOELECTRIC SENSORS

UNSPSC 16.0901	39121528

Connection/Pin assignment

Connection type	Cable with M12 male connector, 4-pin, 150 mm
Connection type Detail	
Conductor cross section	0.13 mm²
Cable material	PVC
Pin assignment	
BN 1	+ (L+)
WH 2	Not connected
BU 3	- (M)
BK 4	Q_1


Dimensional drawing (Dimensions in mm (inch))

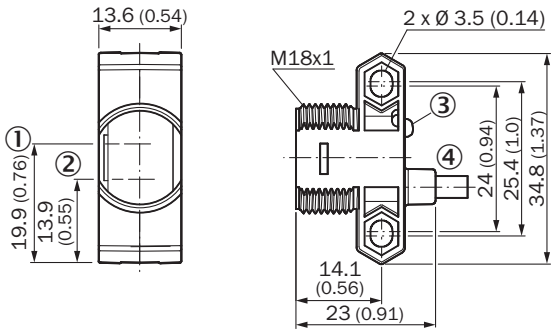

① Optical axis, sender
② Optical axis, receiver
③ LED status indicator
④ Connection

Connection type


Connection type. see table: Connection/PIN assignment



M12 male connector, 4-pin, A-coding


chanhvinh.com

Light spot size

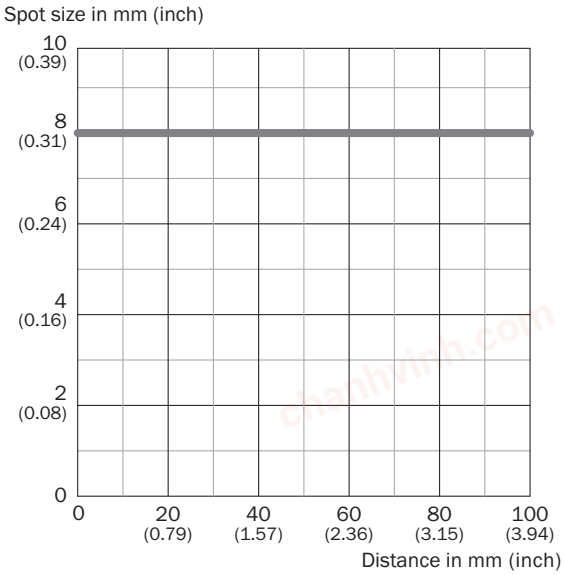

Functions

Sensing range on black, 6% remission factor

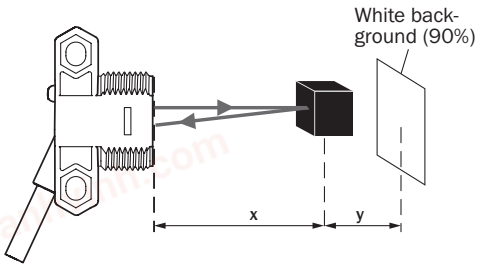

ZTB18-xxxxx**D02**: x = 47 mm / y = 4 mm
ZTB18-xxxxx**D04**: x = 93 mm / y = 8 mm
ZTB18-xxxxx**D06**: x = 139 mm / y = 12 mm

Recommended accessories

Other models and accessories ➜ www.sick.com/Z18_Simple_Sense

	Brief description	Type	Part no.
Plug connectors and cables			
	Head A: female connector, M12, 4-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m	YF2A14-050VB3XLEAX	2096235
	Head A: male connector, M12, 4-pin, straight Cable: unshielded	STE-1204-G	6009932

chanhvinh.com

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com

SICK
Sensor Intelligence.