chanhvinh.com

SIEMENS

## Data sheet 3NB2355-4KK16



Figure similar

SITOR fuse link, with slotted blade contacts, 2 x NH3L, In: 1400 A, aR, Un DC: 1250 V, front indicator

| | |
|---|---|
| **Model** | |
| **product brand name** | SENTRON |
| **product designation** | SITOR fuse link |
| **design of the product** | With slotted blade contacts |
| **design of an identification indicator** | front indicator |
| **design of the switching contact** | with slotted blade contacts for M10 screw fixing |
| **design of the fuse link** | Parallel SITOR semiconductor fuse, LV HRC design |
| **General technical data** | |
| **size of fuse system according to EN 60269-1** | 2 x NH3L |
| **operating class of the fuse link** | aR |
| **type of voltage of the operating voltage** | DC |
| **Supply voltage** | |
| **supply voltage** | |
| ● at DC | 1 250 V |
| **Breaking Capacity** | |
| switching capacity current | |
| ● at DC according to IEC 60947-2 rated value | 150 kA |
| **Dissipation** | |
| **power loss [W]** | 250 W |
| **power loss [W]** | |
| ● for rated value of the current at AC in hot operating state per pole | 250 W |
| ● maximum | 250 W |
| **Product details** | |
| **product description** | with bolt-on links, silver-plated |
| **accessories included** | no |
| **Mechanical Design** | |
| **mounting position** | Any, preferably vertical |
| **Environmental conditions** | |
| **ambient temperature during operation** | |
| ● minimum | -20 °C |
| ● maximum | 50 °C |
| **environmental category** | -20 to +50 at 95% relative humidity |
| **Approvals Certificates** | |
| **General Product Approval** | **other** |


Subject to change without notice
© Copyright Siemens

chanhvinh.com

| | | | | | |
|---|---|---|---|---|---|
| UK CA | CE EG-Konf. | Confirmation | UR | EAC | Confirmation |


| other | Environment |
|---|---|
| Miscellaneous | Environmental Confirmations |

## Further information

**Information on the packaging**
https://support.industry.siemens.com/cs/ww/en/view/109813875
**Information- and Downloadcenter (Catalogs, Brochures,…)**
http://www.siemens.com/lowvoltage/catalogs
**Industry Mall (Online ordering system)**
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NB2355-4KK16
**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
https://support.industry.siemens.com/cs/ww/en/ps/3NB2355-4KK16
**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NB2355-4KK16
**CAx-Online-Generator**
http://www.siemens.com/cax
**Tender specifications**
http://www.siemens.com/specifications


Subject to change without notice
© Copyright Siemens

chanhvinh.com

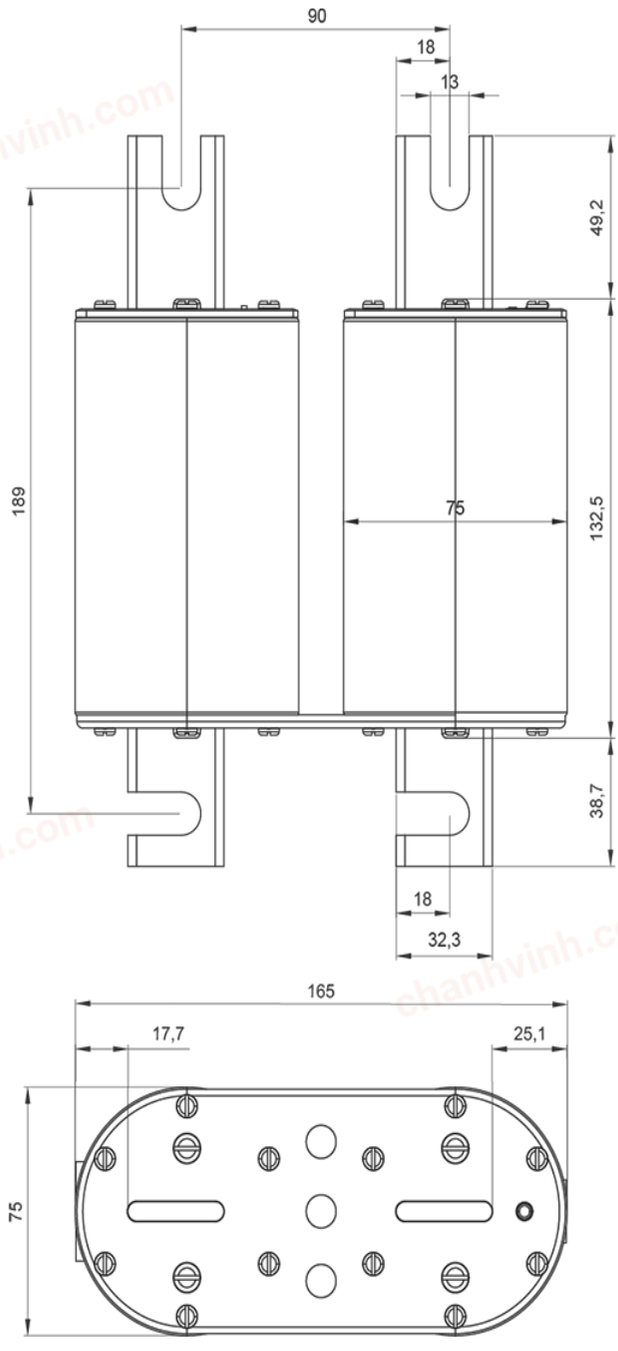


**last modified:** 8/12/2023


Subject to change without notice
© Copyright Siemens

chanhvinh.com

chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com


Subject to change without notice
© Copyright Siemens