chanhvinh.com

SIEMENS

## Data sheet 3NE5336-0MK06



SITOR fuse link, with slotted blade contacts, NH2, In: 630 A, aR, Un AC: 1500 V, Un DC: 1000 V, without Indicator

| | |
|---|---|
| **Model** | |
| **product brand name** | SENTRON |
| **product designation** | SITOR fuse link |
| **design of the product** | With slotted blade contacts |
| **design of an identification indicator** | Without indicator |
| **design of the switching contact** | with slotted knife blade contacts for screw mounting. mounting dimensions: 170 mm |
| **design of the fuse link** | SITOR, LV HRC design |
| **General technical data** | |
| **size of fuse system according to EN 60269-1** | NH2 |
| **operating class of the fuse link** | aR |
| **type of voltage of the operating voltage** | AC/DC |
| **Supply voltage** | |
| **supply voltage** | |
| ● at AC | 1 500 V |
| ● at DC | 1 000 V |
| **Breaking Capacity** | |
| switching capacity current | |
| ● at DC according to IEC 60947-2 rated value | 45 kA |
| ● according to IEC 60947-2 rated value | 30 kA |
| **Dissipation** | |
| **power loss [W]** | 163 W |
| **power loss [W]** | |
| ● for rated value of the current at AC in hot operating state per pole | 163 W |
| ● maximum | 163 W |
| **Product details** | |
| **product description** | with bolt-on links, silver-plated |
| **accessories included** | no |
| **Mechanical Design** | |
| **mounting position** | Any, preferably vertical |
| **net weight** | 1 257 g |
| **Environmental conditions** | |
| **ambient temperature during operation** | |
| ● minimum | -20 °C |
| ● maximum | 50 °C |
| **environmental category** | -20 to +50 at 95% relative humidity |
| **Approvals Certificates** | |
| **General Product Approval** | **other** |


Subject to change without notice
© Copyright Siemens

chanhvinh.com

| | | | | | |
|---|---|---|---|---|---|
| UKCA | CE EG-Konf. | Confirmation | EAC | Miscellaneous | Confirmation |

## Environment


| | |
|---|---|
| Environmental Con-firmations | Environmental Con-firmations |


## Further information

**Information on the packaging**
https://support.industry.siemens.com/cs/ww/en/view/109813875
**Information- and Downloadcenter (Catalogs, Brochures,…)**
http://www.siemens.com/lowvoltage/catalogs
**Industry Mall (Online ordering system)**
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NE5336-0MK06
**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
https://support.industry.siemens.com/cs/ww/en/ps/3NE5336-0MK06
**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE5336-0MK06
**CAx-Online-Generator**
http://www.siemens.com/cax
**Tender specifications**
http://www.siemens.com/specifications


Subject to change without notice
© Copyright Siemens

chanhvinh.com

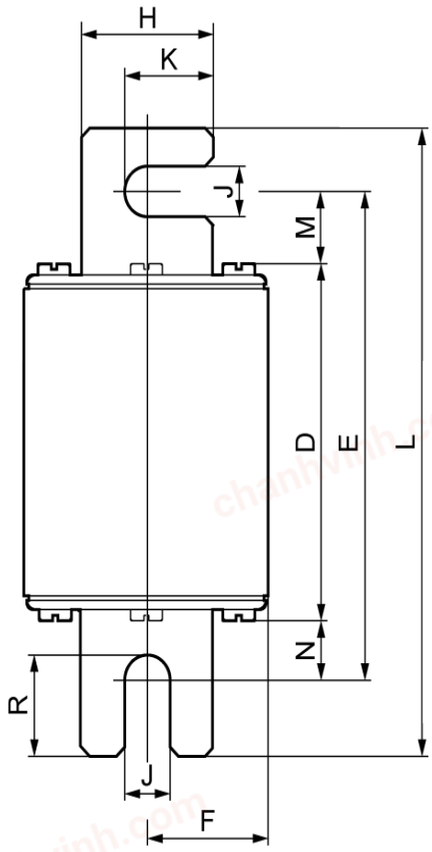

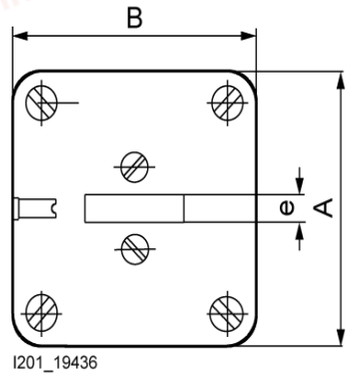
I201_19436

| Type | Dimensions | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | A | B | D | E | F | H | J | K | L | M | N | R | e |
| **3NE32..-0MK** | 52 | 52 | 78,4 | 106,6 | 26 | 25 | 11 | 18 | 137 | 15,7 | 12,5 | 22,3 | 6 |
| **3NE32..-0MK08** | 52 | 52 | 78,4 | 106,6 | 26 | 25 | 11 | 18 | 137 | 15,7 | 12,5 | 22,3 | 6 |
| **3NE53..-0MK06** | 60 | 60 | 137 | 165,5 | 30 | 32 | 11 | 21,5 | 196 | 15,8 | 12,8 | 22,1 | 6 |

**last modified:** 8/12/2023


Subject to change without notice
© Copyright Siemens

chanhvinh.com

chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com


Subject to change without notice
© Copyright Siemens