chanhvinh.com

SIEMENS

Data sheet 5TT4205-2



switching relay with 1 NO and 1 NC contact, contact for 230V AC 16A control 24V AC

Model	
product brand name	SENTRON
product designation	Switching relays
design of the product	with 1 NC and 1 NO
design of the switching function	1 NO + 1 NC
General technical data	
operating range factor of control voltage_1	0.8
electrical endurance (operating cycles)	50 000
galvanic isolation between magnet coil and contact	Yes
switching voltage of the contacts at AC minimum	10 V
switching current at AC per contact minimum	100 mA
power loss [V·A] of magnet coil with pulse rated value	3 VA
Voltage	
type of voltage of the operating voltage	AC
control voltage at AC rated value maximum	24 V
surge voltage resistance rated value	4 kV
Supply voltage	
operating voltage	
• minimum	400 V
• maximum	400 V
• at AC rated value maximum	400 V
type of voltage of the supply voltage	AC
Protection class	
protection class IP	IP20, with connected conductors
Switching capacity	
switching capacity apparent power	
• for uncompensated fluorescent lamp load	400 VA
switching capacity current at cos phi 0.6	16 A
switching capacity active power with incandescent lamp load	1 200 W
Dissipation	
power loss [W]	
• for rated value of the current at AC in hot operating state per pole	1 W
• at 16 A per contact rated value	1 W
• of magnet coil with pulse rated value	2.4 W
Main circuit	
operating frequency rated value	50 Hz
operational current	
• rated value	16 A

Subject to change without notice
© Copyright Siemens

chanhvinh.com

• at cos phi 0.6 ... 1 rated value	16 A
Control current	
type of voltage	
• of control voltage_1	AC
control voltage	
• _1 initial value	24 V
• _1 full-scale value	24 V
control voltage frequency	
• _1 initial value	50 Hz
• _1 full-scale value	50 Hz
operating range factor of control voltage_2	1.1
number of NC contacts	1
number of NO contacts	1
number of CO contacts	0
Product function	
product function direct operation	Yes
Inputs Outputs	
relay design	partially electronic
Number	
number of terminals with cross-head screw	1
Connections	
connectable conductor cross-section for flexible conductor with core end processing	
• minimum	1 mm²
• maximum	6 mm²
connectable conductor cross-section for rigid conductor	
• minimum	1 mm²
• maximum	6 mm²
Mechanical Design	
width of opening of the contacts	1.2 mm
installation depth	90 mm
number of modular width units	1
fastening method	DIN rail
mounting position	any
required spacing for live parts	6 mm
Environmental conditions	
ambient temperature during operation	
• minimum	-10 °C
• maximum	40 °C

General Product Approval					Declaration of Conformity
CCC	Confirmation	VDE	Miscellaneous	EAC	UKCA

Declaration of Conformity	Test Certificates	other		Environment
CE EG-Konf.	Miscellaneous	Confirmation	Miscellaneous	Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).
https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business
Siemens is working on the renewal of the current EAC certificates.
Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these

Subject to change without notice
© Copyright Siemens

products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs


Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TT4205-2

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/5TT4205-2

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT4205-2

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://www.siemens.com/specifications

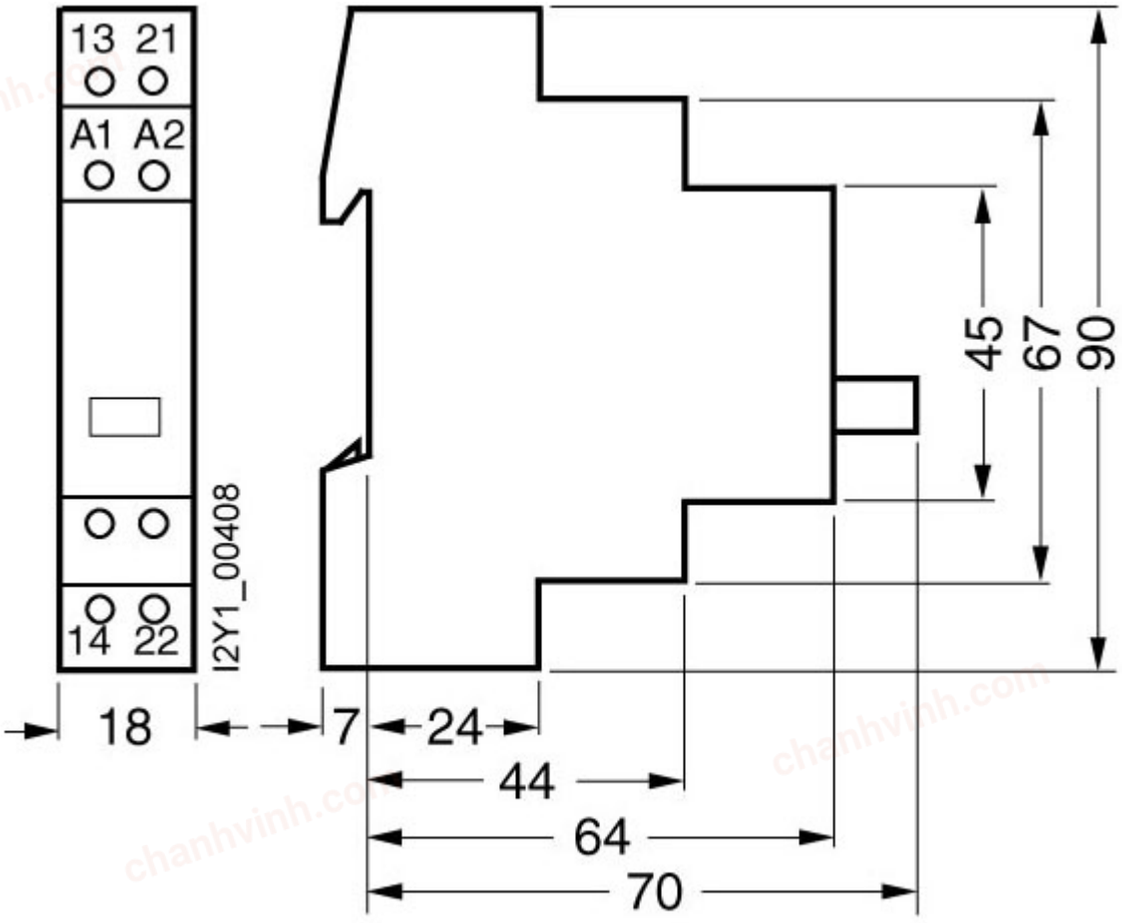

last modified: 10/15/2021

Subject to change without notice
© Copyright Siemens

chanhvinh.com

chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com

Subject to change without notice
© Copyright Siemens