chanhvinh.com

SIEMENS

Data sheet 5TT4207-1



Figure similar

switching relay with 2 CO contact for 230V AC 16A control 115V AC

Model	
product brand name	SENTRON
product designation	Switching relays
design of the product	With 2 CO
design of the switching function	2 CO
General technical data	
operating range factor of control voltage_1	0.8
electrical endurance (operating cycles)	50 000
galvanic isolation between magnet coil and contact	Yes
switching voltage of the contacts at AC minimum	10 V
switching current at AC per contact minimum	100 mA
power loss [V·A] of magnet coil with pulse rated value	3 VA
Voltage	
type of voltage of the operating voltage	AC
control voltage at AC rated value maximum	115 V
surge voltage resistance rated value	4 kV
Supply voltage	
operating voltage	
● minimum	400 V
● maximum	400 V
● at AC rated value maximum	400 V
type of voltage of the supply voltage	AC
Protection class	
protection class IP	IP20, with connected conductors
Breaking Capacity	
switching capacity apparent power	
● for uncompensated fluorescent lamp load	400 VA
switching capacity current at cos phi 0.6	16 A
switching capacity active power with incandescent lamp load	1 200 W
Dissipation	
power loss [W]	
● for rated value of the current at AC in hot operating state per pole	1 W
● at 16 A per contact rated value	1 W
● of magnet coil with pulse rated value	2.4 W
Main circuit	
operating frequency rated value	50 Hz
operational current	

Subject to change without notice
© Copyright Siemens

chanhvinh.com

● rated value	16 A
● at cos phi 0.6 ... 1 rated value	16 A
Control current	
type of voltage	
● of control voltage_1	AC
control voltage	
● _1 initial value	115 V
● _1 full-scale value	115 V
control voltage frequency	
● _1 initial value	50 Hz
● _1 full-scale value	50 Hz
operating range factor of control voltage_2	1.1
number of NC contacts	0
number of NO contacts	0
number of CO contacts	2
Product function	
product function direct operation	Yes
Inputs Outputs	
relay design	partially electronic
Number	
number of terminals with cross-head screw	1
Connections	
connectable conductor cross-section for flexible conductor with core end processing	
● minimum	1 mm²
● maximum	6 mm²
connectable conductor cross-section for rigid conductor	
● minimum	1 mm²
● maximum	6 mm²
Mechanical Design	
height	90 mm
width	18 mm
width of opening of the contacts	1.2 mm
depth	76 mm
installation depth	70 mm
number of modular width units	1
fastening method	DIN rail
mounting position	any
required spacing for live parts	6 mm
Environmental conditions	
ambient temperature during operation	
● minimum	-10 °C
● maximum	40 °C

Approvals Certificates

General Product Approval	Test Certificates
CCC, EG-Konf., UKCA, VDE, EAC	Miscellaneous

other	Environment	
Confirmation	Environmental Con-firmations	Environmental Con-firmations


Further information

Information on the packaging

Subject to change without notice
© Copyright Siemens

chanhvinh.com

https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TT4207-1
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/5TT4207-1
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT4207-1
CAx-Online-Generator
http://www.siemens.com/cax
Tender specifications
http://www.siemens.com/specifications

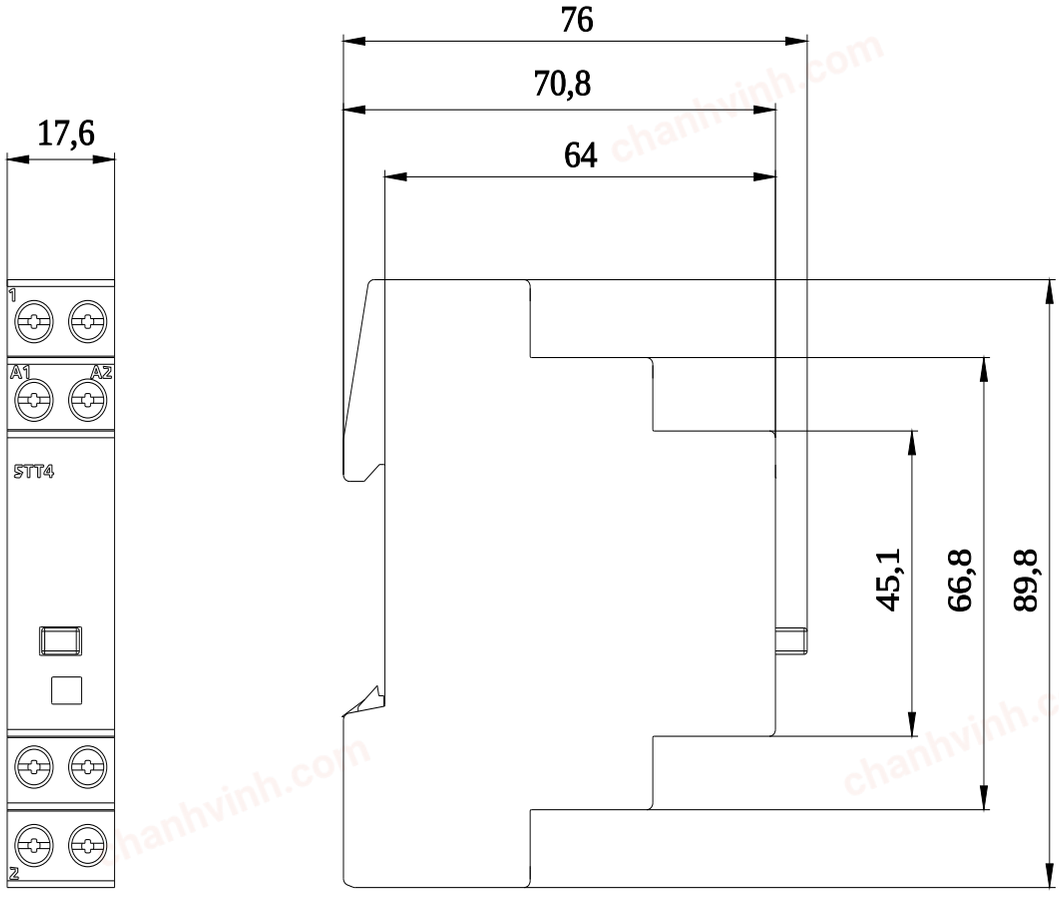

last modified: 4/12/2025

Subject to change without notice
© Copyright Siemens

chanhvinh.com

chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com

Subject to change without notice
© Copyright Siemens