
chanhvinh.com

SIEMENS

Data sheet 6XV1831-2L

product type designation	**PROFIBUS FC Trailing Cable**
product description	Highly flexible bus cable (2-core), sold by the meter, unassembled

PROFIBUS FC Trailing Cable, PROFIBUS trailing cable, max. Acceleration 4 m/QS min. 3 million bending cycles min. Bending radius approx. 120 mm 2-wire shielded, sold by the meter delivery unit max. 1000 m minimum order quantity 20 m.

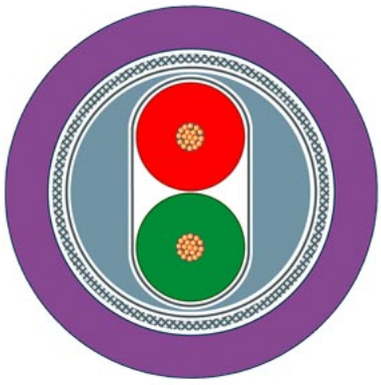

suitability for use	Continuous motion control in a cable carrier
cable designation	02YY (ST) C11Y 1x2x0,65/2,56-150 LI KF 40 FR VT FC
electrical data	
attenuation factor per length	
● at 9.6 kHz / maximum	0.003 dB/m
● at 38.4 kHz / maximum	0.004 dB/m
● at 4 MHz / maximum	0.025 dB/m
● at 16 MHz / maximum	0.049 dB/m
impedance	
● rated value	150 Ω
● at 9.6 kHz	270 Ω
● at 38.4 kHz	185 Ω
● at 3 MHz … 20 MHz	150 Ω
relative symmetrical tolerance	
● of the characteristic impedance at 9.6 kHz	10 %
● of the characteristic impedance at 38.4 kHz	10 %
● of the characteristic impedance at 3 MHz … 20 MHz	10 %
loop resistance per length / maximum	133 mΩ/m
shield resistance per length / maximum	14 Ω/km
capacity per length / at 1 kHz	28 pF/m
operating voltage	
● RMS value	80 V
mechanical data	
number of electrical cores	2
design of the shield	Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires
type of electrical connection / FastConnect	Yes
outer diameter	
● of inner conductor	0.67 mm
● of the wire insulation	2.56 mm
● of the inner sheath of the cable	5.4 mm
● of cable sheath	8 mm
symmetrical tolerance of the outer diameter / of cable sheath	0.4 mm
material	
● of the wire insulation	polyethylene (PE)
● of the inner sheath of the cable	PVC
● of cable sheath	PUR (TPE-U)
color	

Subject to change without notice
© Copyright Siemens

chanhvinh.com

• of the insulation of data wires	red/green
• of cable sheath	Violet
bending radius	
• with single bend / minimum permissible	40 mm
• with continuous bending	120 mm
number of bending cycles	3000000; Drag chain suitable for 3 million bending cycles at a bending radius of 120 mm (15x D) and an acceleration of 4 m/s²
tensile load / maximum	100 N
weight per length	77 kg/km
ambient conditions	
ambient temperature	
• during operation	-40 ... +60 °C
• during storage	-40 ... +60 °C
• during transport	-40 ... +60 °C
• during installation	-40 ... +60 °C
• note	Electrical properties measured at 20 °C, tests according to DIN 47250 part 4 respectively DIN VDE 0472
ambient condition / for operation	Limited segment length (see manual for PROFIBUS networks)
fire behavior	flame resistant according to IEC 60332-1-2
class of burning behaviour / according to EN 13501-6	Eca
chemical resistance	
• to mineral oil	oil resistant according to IEC 60811-2-1 (7x24h/90°C)
• to grease	resistant
• to water	conditional resistance
radiological resistance / to UV radiation	resistant
product features, product functions, product components / general	
product feature	
• halogen-free	No
• silicon-free	Yes
standards, specifications, approvals	
UL/ETL listing / 300 V Rating	Yes; CMX
UL/ETL style / 600 V Rating	No
certificate of suitability	
• EAC approval	Yes
• CE marking	Yes
• RoHS conformity	Yes
Marine classification association	
• American Bureau of Shipping Europe Ltd. (ABS)	No
• French marine classification society (BV)	No
• Det Norske Veritas (DNV)	No
• Germanische Lloyd (GL)	No
• Lloyds Register of Shipping (LRS)	No
• Nippon Kaiji Kyokai (NK)	No
• Polski Rejestr Statkow (PRS)	No
reference code	
• according to IEC 81346-2	WG
• according to IEC 81346-2:2019	WGB
further information / internet links	
internet link	
• to web page: selection aid TIA Selection Tool	http://www.siemens.com/tia-selection-tool
• to website: Industrial communication	http://www.siemens.com/simatic-net
• to website: Industry Mall	https://mall.industry.siemens.com
• to website: Information and Download Center	http://www.siemens.com/industry/infocenter
• to website: Selection guide for cables and connectors	https://sie.ag/2QdlxcP
• to website: Image database	http://automation.siemens.com/bilddb
• to website: CAx-Download-Manager	http://www.siemens.com/cax
• to website: Industry Online Support	https://support.industry.siemens.com

last modified: 10/30/2021

Subject to change without notice
© Copyright Siemens