chanhvinh.com

SIEMENS

Data sheet 8US1216-5AS80



Device Adapter S00, S0, 32A, 200 x 45 mm, for 60mm busbar system for use with connector 3RV29 with screwless electrical contact

number of mounting rails	1
Connections	
type of electrical connection	plug-in contact
Mechanical Design	
height	200 mm
width of the adapter	45 mm
depth	80 mm
thickness of the busbar	
● minimum	5 mm
● maximum	10 mm
busbar center-to-center spacing	60 mm
net weight	332 g

Approvals Certificates

General Product Approval			Test Certificates		Marine / Shipping
Confirmation	UL	EAC	Type Test Certific-ates/Test Report	Miscellaneous	ABS


Marine / Shipping	other		Environment	
BUREAU VERITAS	Miscellaneous	Confirmation	Environmental Con-firmations	Environmental Con-firmations

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1216-5AS80
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/8US1216-5AS80
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1216-5AS80
CAx-Online-Generator
http://www.siemens.com/cax
Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

chanhvinh.com

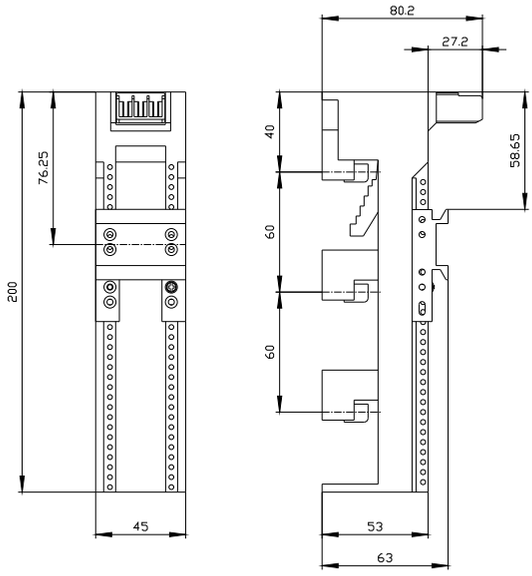

last modified: 4/30/2023

Subject to change without notice
© Copyright Siemens

chanhvinh.com

chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com

Subject to change without notice
© Copyright Siemens