chanhvinh.com

SIEMENS

Data sheet LZS:PT7874P



Plug-in socket for PT relay 4 changeover contacts with logic isolation Spring-type terminal (push-in)

General technical data	
display version LED	No
protection class IP	IP20
switching behavior	monostable
design of the switching function	changeover switch
design of the switching function positively driven	No
reference code according to IEC 81346-2	U
Substance Prohibitance (Date)	05/01/2012
design of the relay operating mechanism	poled
product component plug-in socket	Yes
design of the snap-on socket base	Socket with logic isolation
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Connections/ Terminals	
product function removable terminal	No
type of electrical connection	spring-loaded terminals
type of connectable conductor cross-sections	
● solid	1x (0,75 ... 1,5), 2x (0,75 ... 1,0), 2x 1,5
● finely stranded with core end processing	1x (0,75 ... 1,5), 2x 0,75
● finely stranded without core end processing	1x (0,75 ... 1,5), 2x (0,75 ... 1,0), 2x 1,5
● for AWG cables solid	1x (18 ... 16), 2x (18 ... 16)
● for AWG cables stranded	1x (18 ... 16), 2x (18 ... 16)
connectable conductor cross-section	
● solid	0.75 ... 1.5 mm²
● finely stranded with core end processing	0.75 ... 1.5 mm²
● finely stranded without core end processing	0.75 ... 1.5 mm²
AWG number as coded connectable conductor cross section	
● solid	18 ... 16
● stranded	18 ... 16
Installation/ mounting/ dimensions	
mounting position	any
fastening method	snap-on mounting
height	98 mm
width	28 mm
depth	48.3 mm
Ambient conditions	
ambient temperature	

Subject to change without notice
© Copyright Siemens

chanhvinh.com

● during operation	-40 ... +70 °C
● during storage	-25 ... +70 °C
● during transport	-25 ... +70 °C

Approvals Certificates

General Product Approval				Marine / Shipping	other
Confirmation	UL	VDE	EAC	LRS	Confirmation

Further information

Siemens has decided to exit the Russian market (see here).
https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.
Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=LZS:PT7874P

Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=LZS:PT7874P

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT7874P

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=LZS:PT7874P&lang=en

Characteristic: Derating
https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT7874P/manual

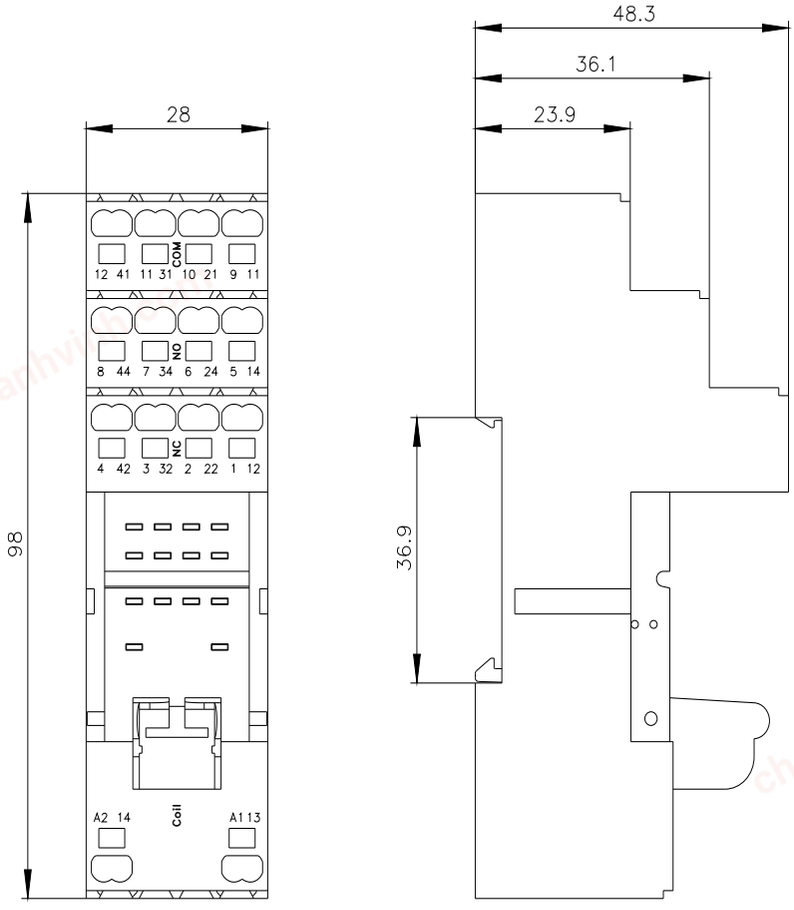

Subject to change without notice
© Copyright Siemens

chanhvinh.com

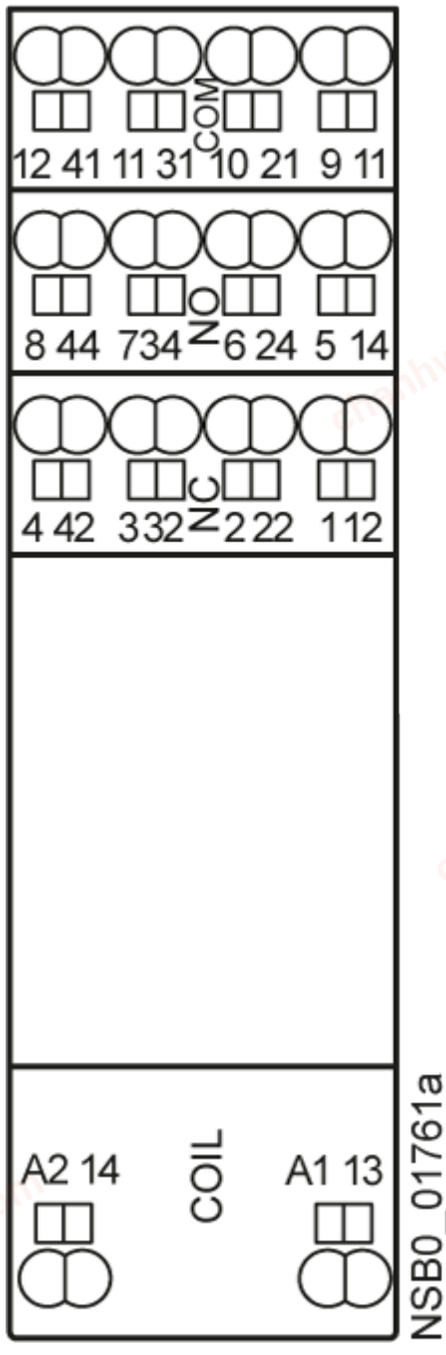

Subject to change without notice
© Copyright Siemens

chanhvinh.com

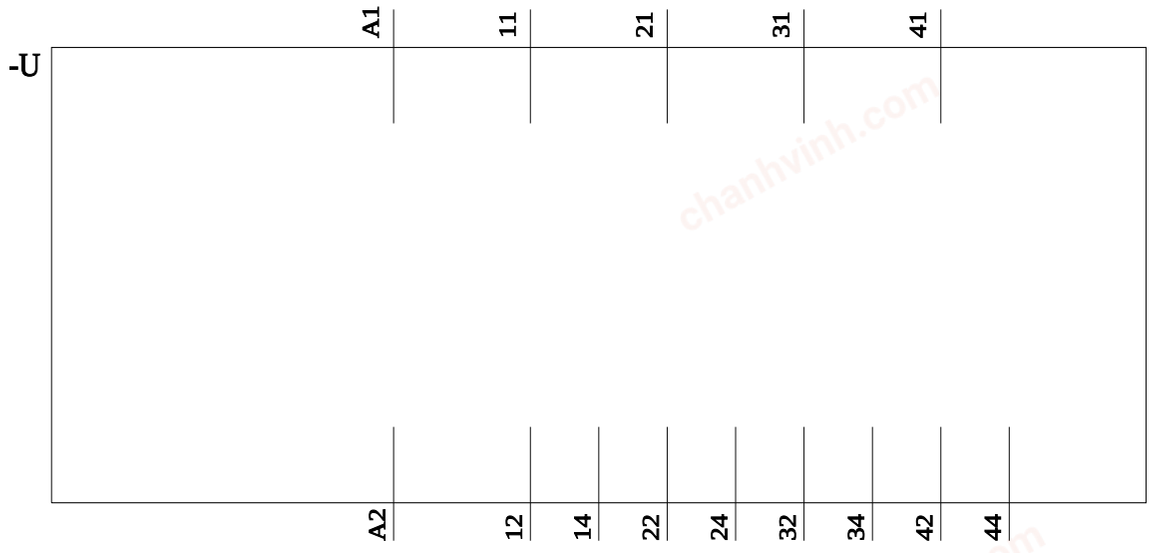

last modified: 12/23/2020

Subject to change without notice
© Copyright Siemens