
chanhvinh.com

SMC
Expertise – Passion – Automation

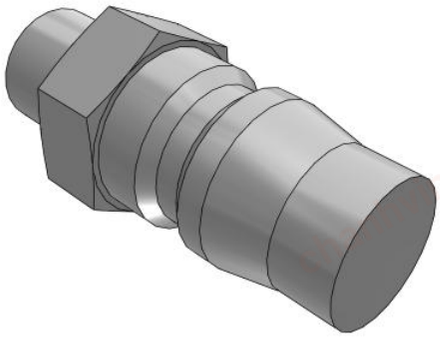

# KK130P-*M, S-Couplers, Male Thread

## KK130P-01MS

Datasheet

- S coupler with Plug and Socket
- Energy saving and Cost reduction
- Plug insertion forced reduced by 22 %
- Compact and Lightweight reduced by 14 %
- Applicable tubing from Ø 6 to Ø 1/2
- Thread, sizes: R, Rc, NPT from 1/8 to 1/2
- One-touch fitting type is available as standard
- Sleeve lock mechanism is available.


Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.



SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es

| | |
|---|---|
| Piping Port Size | R 1/8 |
| Pressure medium | Air |
| Maximum operating pressure | 1.5 MPa |
| Minimum operating pressure | 0 MPa |
| Proof pressure | 2 MPa |
| Maximum ambient temperature | 80 °C |
| Minimum ambient temperature | -20 °C (with no freezing) |
| Sealing principle | Male thread with sealant |
| Plating | Sleeve: Electroless nickel plated Other external metal parts: Zinc chromated |
| Weight | 0.019 Kg |

## Dimensions

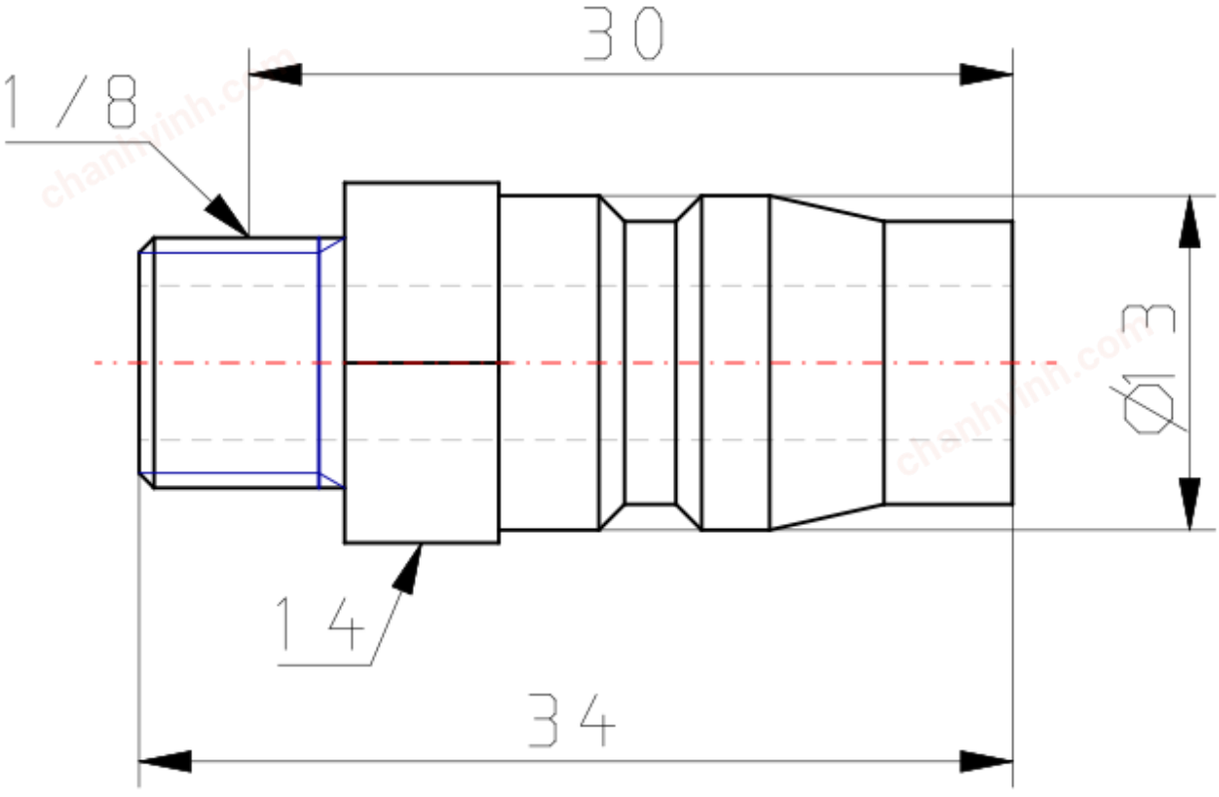


Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.



SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es

chanhvinh.com



## Additional information

Catalogue KK130-B_EU.pdf

chanhvinh.com

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.



**SMC CORPORATION** Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es