
chanhvinh.com

Expertise – Passion – Automation

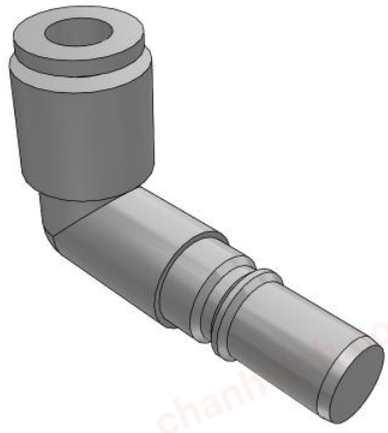

KK*P-*L, S-Couplers, Elbow Type with One-touch Fitting

KK3P-06L

Datasheet

General series information

- Elbow Type with One-touch Fitting.
- Body size: M5, 1/8, 1/4, 1/2.
- Applicable Tubing O.D.: ø3.2, ø4, ø6, ø8, ø10, ø12, ø16.

Standard specifications


Body Size	3 (1/8)
Applicable Tubing O.D.	Ø6 mm
Pressure medium	Air, Water
Maximum operating pressure	1.0 MPa
Minimum operating pressure	-90 kPa
Proof pressure	1.5 MPa
Maximum ambient temperature	60 °C / 40 °C for Water
Minimum ambient temperature	-5 °C (with no freezing) / 5 °C for Water
Effective Area	20 mm²
Sealing principle	Electroless nickel plated (copper-free application), With male thread sealant
Weight	0.008 Kg

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es

chanhvinh.com

Dimensions

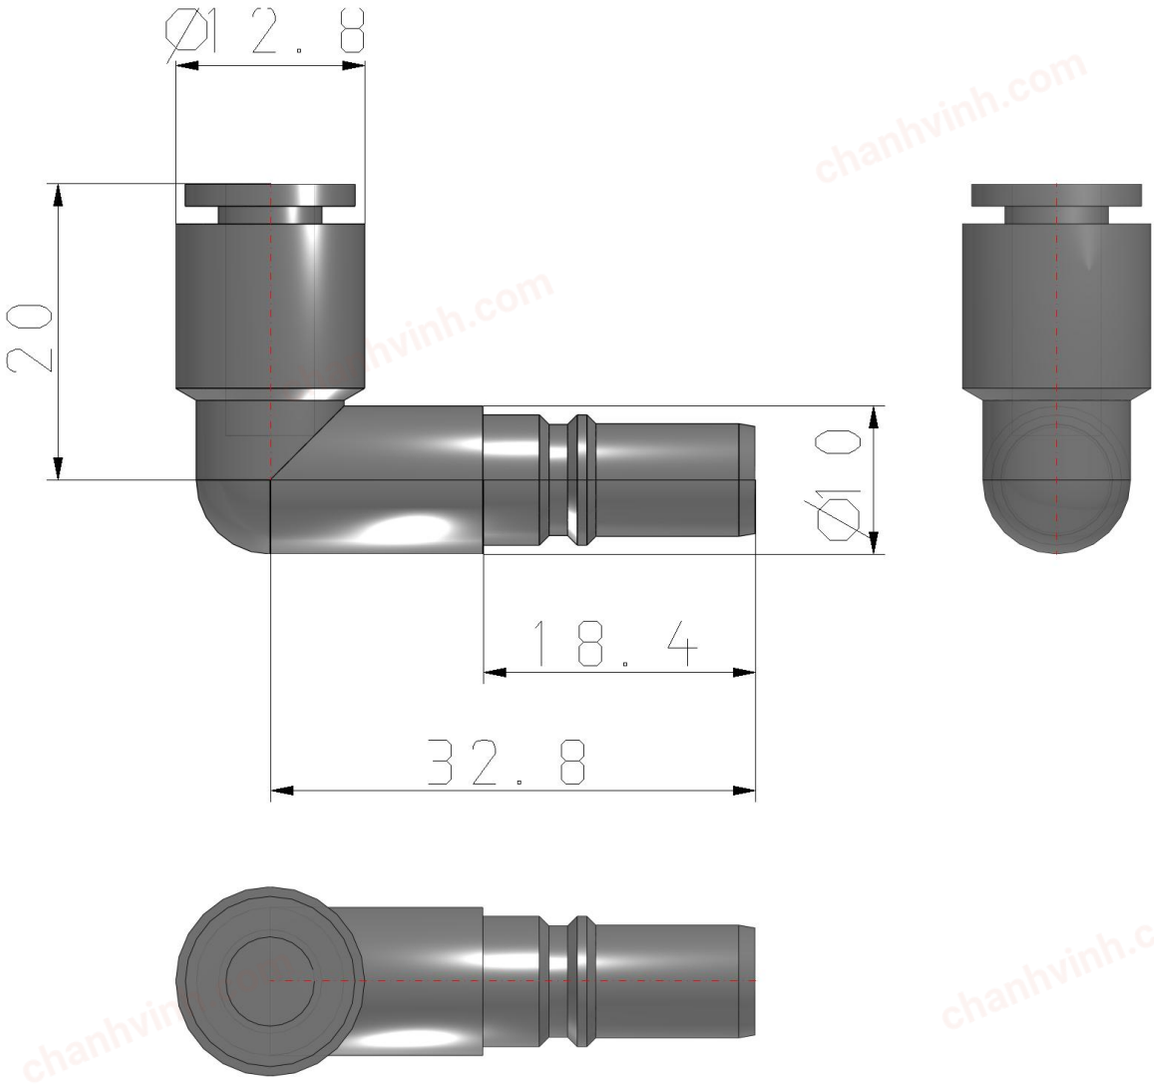

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es

chanhvinh.com

Additional information

Catalogue KK-C_EU.pdf

chanhvinh.com

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es