
chanhvinh.com

Expertise – Passion – Automation

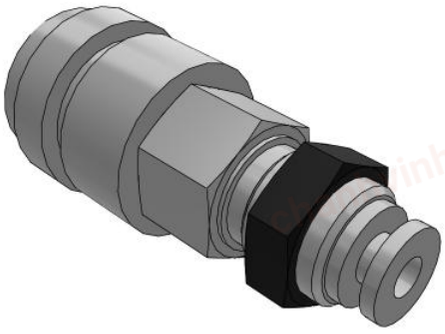

KK*S-*E, S-Couplers, Bulkhead Type with One-touch Fitting

KK3S-04E

Datasheet

- S coupler for general purpose with Plug and Socket
- Applicable tubing from Ø 3.2 to Ø 16
- Thread, sizes: M, R, Rc, from M5 to 3/4
- Fluid temperature: -5 to 60 °C, water: 5 to 40 °C
- One-touch fitting type standardized
- With sleeve lock mechanism (Except KK2).


Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es

chanhvinh.com

Body Size	3 (1/8)
Applicable Tubing O.D.	Ø4 mm
Pressure medium	Air, Water
Maximum operating pressure	1.0 MPa
Minimum operating pressure	-90 kPa
Proof pressure	1.5 MPa
Maximum ambient temperature	60 °C / 40 °C for Water
Minimum ambient temperature	-5 °C (with no freezing) / 5 °C for Water
Effective Area	20 mm²
Sealing principle	Electroless nickel plated (copper-free application), With male thread sealant
Weight	0.027 Kg

Dimensions

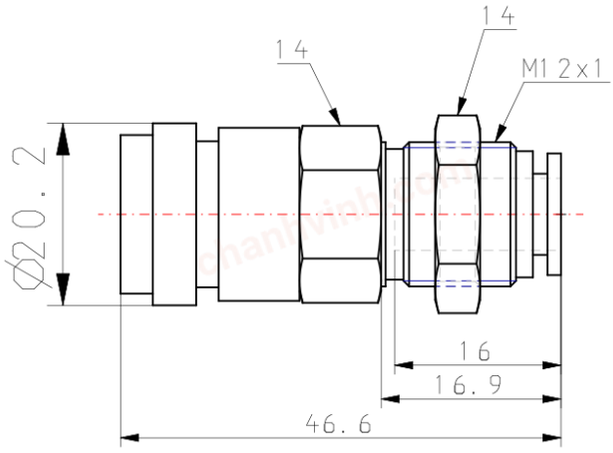

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es

chanhvinh.com

Additional information

Catalogue	KK-C_EU.pdf

chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es