
chanhvinh.com

SMC
Expertise – Passion – Automation

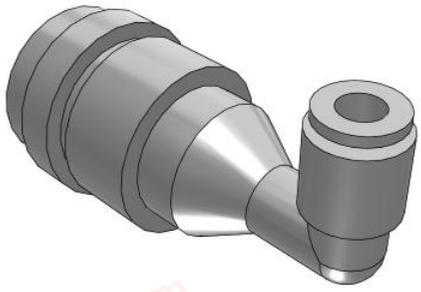

KK*S-*L, S-Couplers, Elbow Type with One-touch Fitting

KK4S-06L

-


- Elbow Type with One-touch Fitting.
- Body size: M5, 1/8, 1/4, 1/2.
- Applicable Tubing O.D.: ø3.2, ø4, ø6, ø8, ø10, ø12, ø16.


-


Body Size	4 (1/4)
Applicable Tubing O.D.	Ø6 mm
-	Air, Water
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0 kPa
Proof pressure	1.5 MPa
Effective Area	39 mm²
Sealing principle	Electroless nickel plated (copper-free application), With male thread sealant
Weight	0.043 Kg

chanhvinh.com

-

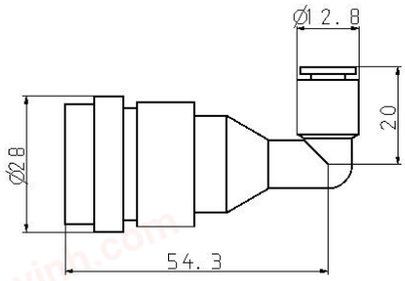



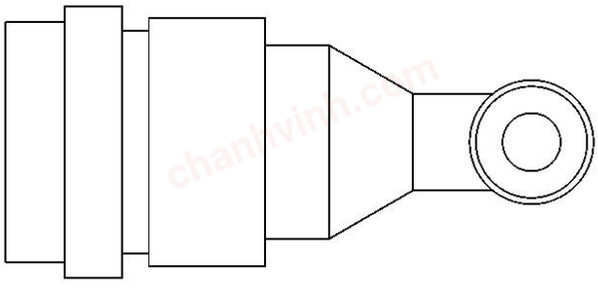

chanhvinh.com

-

- KK-C_EU.pdf